



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 9 Issue: 1 Month of publication: January 2021

DOI: <https://doi.org/10.22214/ijraset.2021.32725>

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Hand Gestures Controlled Robot using Arduino

Gurkirat Singh¹, Harpreet Kaur²

¹ Scholar of Electrical Engineering Department, Chandigarh University, Gharuan, Mohali, Punjab

² Assistant Professor, Electrical Engineering Department, Chandigarh University, Gharuan, Mohali, Punjab

Abstract: In this paper, Hand Gestures has been defined as the mode of communication while interacting with the machine robot. Eliminating the use of primary modes like Remote, joystick, etc. The hand gesture robot is beneficial to reduce human efforts and carry out effective results. Hand gesture robot uses the simple module like Arduino, accelerometer and nRF2401L, etc. which is found to be effective than other wireless modules

Keywords: Arduino, Hand Gestures, Robot, transmission, Sensors, etc.

I. INTRODUCTION

With the Evolution of technology, the interaction with machine has increased day by day. From Switching on Light from Smartphone to Controlling of vehicle. Technology has become a part n parcel in one's life. There are various ways to interact with machine like remote control, joystick, etc. which is basic method. Nowadays, there be a lot of researches made on controlling of system or device with human Gestures, i.e. eye movement, facial expression or hand gestures which eliminates some barriers like language barrier for robot[2]. Arduino UNO is used to carry commands by interpreting the collection of data received from its interfaced devices. The Device uses the accelerometer to detect the any motion in front of it and transmits the data via Transceivers to receiving end and performs certain task using Arduino micro controller[1]-[3].




Figure 1. Basic flowchart

II. RELATED WORKS

Karolis Root et. al [4] illustrated the concept on the gesture controlled robot manipulator system. They used the band type device which connects the elbow and thumb to control the robotic arm. They concluded that the thumb performs the gripping action and the elbow was used to rotate the robotic arm to certain angle.

Chanhan.G et.al[5] designed the gesture controlled image processing system. They were using the MATLAB to assign the tasks to certain images. They were converting the webcam captured image into binary Image, and then assigned works are performed.

III. LITERATURE SURVEY

Mendes et.al [6] demonstrated about the framework of human-robot interaction for recognition of human behavior and gestures. It depends on the vision based system and 3-axis accelerometer which were used to clarify the gestures, and behaviors. They used integrate system i.e. hidden Markov's model based dynamic recognition and Artificial Neural Networks.

Raheja et.al [7] demonstrated a 4 four wheel mobile robots which was precise in gestural control interface. They were inspired by cyber physical system by which tried to introduce the hand gesture based mobile robot. They used the KUKA youBot mobile platform & to implement the gestural control they have leap motion sensor.

Ahmed S. et.al [8] proposed a new approach in the which gestures were used to control robot manipulators. They used the Microsoft Kinect sensor to track the joint positions, but later on, they used the MATLAB software application which maps the gestures to certain commands.

There aim of provide flexibility and dynamism in the industry manipulators. There final experimental test was completed in Mitsubishi SCARA robot manipulator.

Li, X [9] illustrated the robotic arm manipulator which was controlled by gestures, and limb movement. He used the certain types of algorithms to carry out the somatosensory interaction. He used the DTW template matching algorithm to track the coordinates of gestures, and arm movement[9].

Author /Year	Software	System Configuration	Observation
Mendes et.al (2017)	Human robot interface (HRI)	Integrated system of ANN, and hidden markov's model	Human robot interaction framework was designed and It was that intuitive HRI vision system recognizes at rate of 95% of total input gestures and 97% of of 6 human behaviors
Raheja et.al (2018)	KUKA youBot omnidirectional mobile platform	Based on combination of Cyber and physical world solutions.	A 4 wheel mobile robot was designed to enhance the interaction between the user and the robotic machine.
Ahmed S. et.al (2019)	MATLAB	Microsoft Kinect sensor	Robot manipulators were designed and the experimental test was performed in Mitsubishi SCARA robot manipulator
Li, X (2019)	DTW template algorithm	3D SSD architecture	Robotic arm manipulators were designed and tested using virtual interactive experiments

Table 1. Literature Survey

IV. DESCRIPTION OF COMPONENTS

In this project, there are various modules which work with ARDUINO UNO by interfacing. The components are: Arduino UNO (2), DC Motors (2), MPU5060 (1), NRF2401L (2), Battery and L293D Motor Driver Module

A. Arduino UNO

Arduino Uno is an open source types microcontroller which uses abilities of AtMega328 AVR microcontroller (refer to figure no.2) which is removable and dual inline microcontroller to work flexibility, compact and provides desired function. Arduino Uno is containing 14 I/O pins with 6 PMW pins. It can be interfaced with any type of electronic types to design embedded system and IoT projects. It is cheaper module which is easily available and easy to interact for the beginner to work on.



Figure 2.Arduino UNO

B. NRF24L01

The nRF24L01 (refer to figure no. 3) is a wireless device commonly known as a transceiver module which acts as the transmitter or receiver for data transmission when interfaced with the Arduino UNO. It is based on SPI communication protocol with an operating voltage of 3.3V and 50mA of current. It carries the baud rate of 250kpbs with 125 channel ranges. There are many other RF Modules like 433 RF modules. The module has 8 pins, i.e. Ground, VCC, MISO, MOSI, Clock, interrupt, and CE.




Figure 3. NRF2401L module

C. MPU6050

MPU6050 is an integrated motion tracking device. It is a 6-axis device consisting of 3-axis gyroscopes, 3-axis accelerometers, and a temperature sensor (refer to figure no. 3). It works with the technology of MEMS, i.e. Micro Electromechanical Technology. It measures acceleration, displacement, velocity along the x, y, and z coordinates using the Digital Motion Processor, and then transfers it into voltage using an inbuilt ADC. It has 8 pins on the surface of the module, i.e. VCC, Ground, SCL, SDA, XCL, ADO, XDA, and interrupt. It operates at a voltage of 3-5 Volts with I2C communication type.

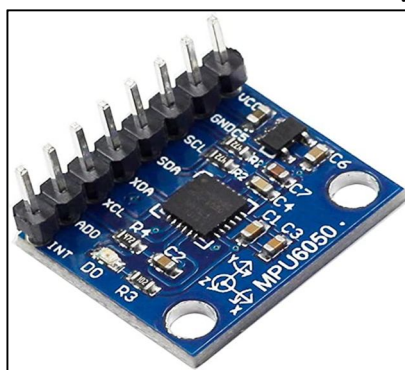


Figure 3. MPU6050

D. L293D Motor Driver Module

As the name suggests, this module is a kind of drive for the project. It is a quadrupled high current $\frac{1}{2}$ H driver which drives two DC motors or stepper motors in the same or different directions independently. It is a medium power motor driver with an operating voltage of 4.5V to 36V, having a current of 600mA. The transition time of the motor driver is 300ns. These modules consist of 16 pins with DIP, TSSOP, SOIC packages. It is used in various digital circuits to drive high current motors or latching relays. (refer to figure no. 4)



Figure 4. L293 Motor Driver Module

E. Battery

There is need of two Zinc Carbon batteries (refer to figure no.5) which are used to supply the DC power of 9 Volts to the circuits. Out the 2, One is used to provide power to the transmitter circuit i.e Arduino Uno, nRF2401L and MUPU6050. Second battery is used to provide the power to the receiver circuit i.e Arduino UNO, nRF2401L and motor driver.



Figure 5. Battery

V. BLOCK DIAGRAM

In this block diagram, (refer to figure no. 6) Arduino is initialized and hand gesture (x and y coordinates) are collect by arduino using gyroscope and data encoded and transmitted by Transceiver. On the receiving side, data are received by transceiver, decodes it and then send it arduino for interpretation. After interpretation Arduino send the desired commands to motor driver for the movement of motors.

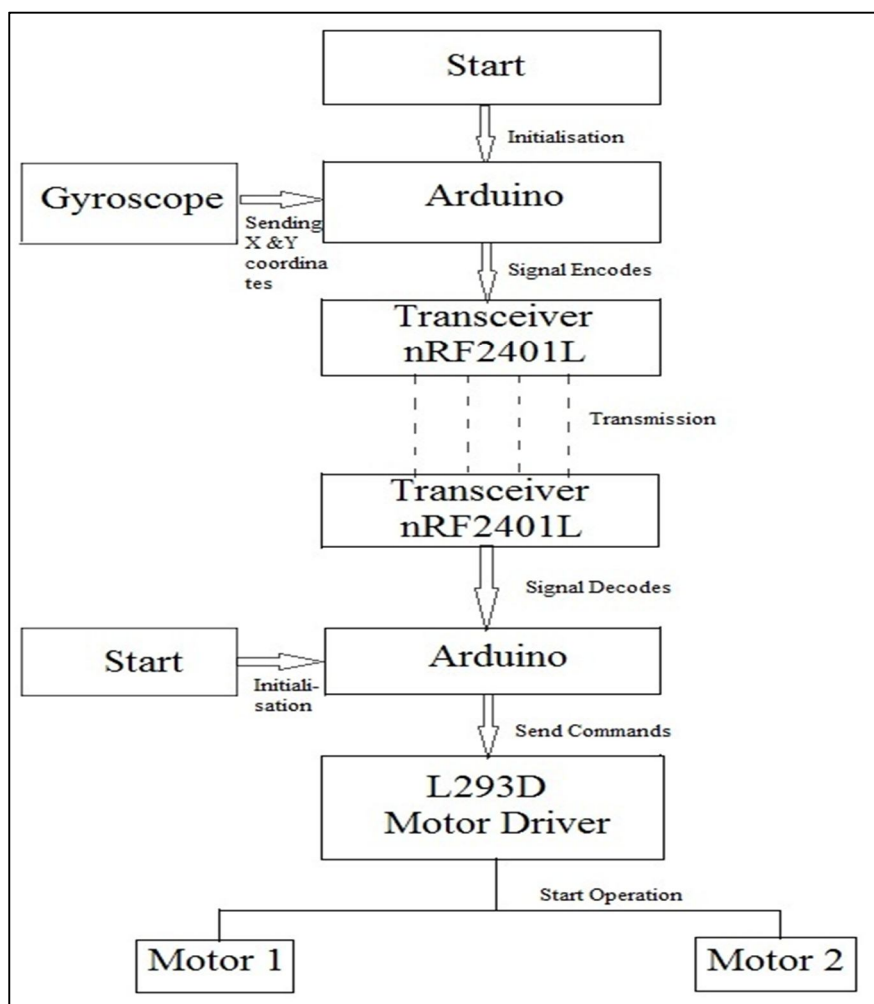


Figure 6. Block Diagram

VI. METHODOLOGY

Firstly, we have fit the transmitting part on our hand using gloves or anything, then There are certain Gestures or action that can be to perform the task like:

- A. Tilt the hand to right side to turn robot to right side .
- B. Tilt hand towards left side to turn robot to left.
- C. Tilt the hand in down from front side to move the robot in forward direction.
- D. Tilt the hand in down from backend to reverse the robot.

VII. PRACTICAL IMAGES

A. Transmit Part

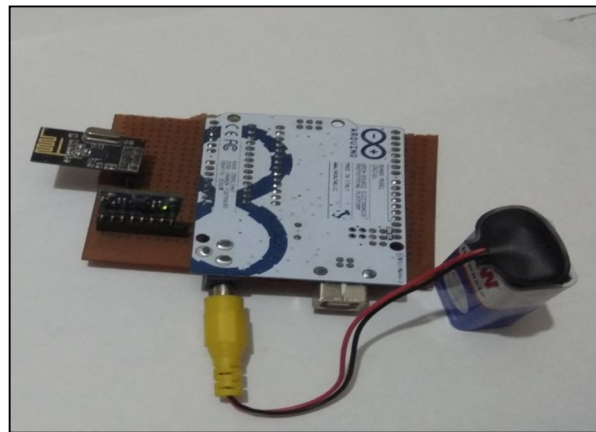


Fig. 7.1 Transmitter

B. Receiving Part

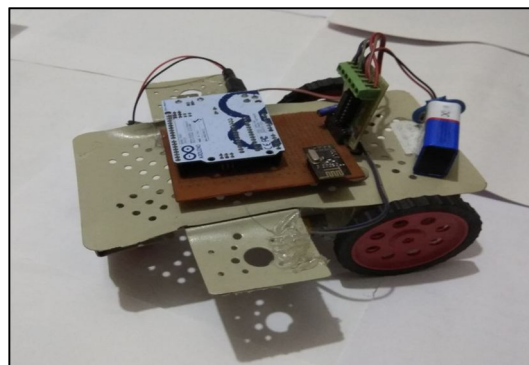


Fig. 7.2 Receiver

VIII. CONCLUSION

In this Project, A robotic car is designed which is controlled by hand gesture using Arduino interfacing. The transmission of data is done with nRF2401L (refer to figure no. 7.1 &7.2) which is found to be very efficient as compared to other wireless modules. This project can be beneficial where the humans are not able to perform any task but can be defined or the task with some device using hand gestures.

IX. FUTURE SCOPE

The devices which are controlled by hand gestures will work efficiently in the field of Defense, industry, medial, etc. The future doctor will examine the human body with image manipulation or can move the tiny robot in the body using gestures, and can find the problem. This will help disabled people to perform various tasks.



REFERENCES

- [1] Wu, X. H., Su, M. C., & Wang, P. C. (2010, October). A hand-gesture-based control interface for a car-robot. In 2010 IEEE/RSJ International Conference on Intelligent Robots and Systems (pp. 4644-4648). IEEE.
- [2] Chanhhan, G., & Chandhari, P. (2015, November). Gestures based wireless robotic control using image processing. In 2015 5th Nirma University International Conference on Engineering (NUiCONE) (pp. 1-7). IEEE.
- [3] Root, K., & Urniezius, R. (2016, September). Research and development of a gesture-controlled robot manipulator system. In 2016 IEEE International Conference on Multisensor Fusion and Integration for Intelligent Systems (MFI) (pp. 353-358). IEEE.
- [4] Mendes, N., Ferrer, J., Vitorino, J., Safeea, M., & Neto, P. (2017). Human behavior and hand gesture classification for smart human-robot interaction. *Procedia Manufacturing*, 11, 91-98.
- [5] Zaman, H. U., Joy, A. A., Akash, K. M., & Fayad, S. T. (2017, June). A simple and effective way of controlling a robot by hand gesture. In 2017 International Conference on Intelligent Computing and Control Systems (ICICCS) (pp. 330-333). IEEE.
- [6] Raheja, J. L., Chandra, M., & Chaudhary, A. (2018). 3D gesture based real-time object selection and recognition. *Pattern Recognition Letters*, 115, 14-19.
- [7] Ahmed, S., Popov, V., Topalov, A., & Shakev, N. (2019). Hand Gesture based Concept of Human-Mobile Robot Interaction with Leap Motion Sensor. *IFAC-PapersOnLine*, 52(25), 321-326.
- [8] Vignesh, T., Nivetha, R., Mowneka, G., & Selvakumar, D. (2019, March). Design and Fabrication of 6-axis Gesture Controlled Robot. In 2019 5th International Conference on Advanced Computing & Communication Systems (ICACCS) (pp. 246-250). IEEE.
- [9] Li, X. (2020). Human-robot interaction based on gesture and movement recognition. *Signal Processing: Image Communication*, 81, 115686.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)