



IJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 9 Issue: 1 Month of publication: January 2021

DOI: <https://doi.org/10.22214/ijraset.2021.32942>

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Performance Analysis of a Combined Dual-Stage Waste Heat Recovery System Integrated to an Internal Combustion Engine

Zunaid Ahmed

Department of Mechanical Engineering, The Assam Royal Global University, Guwahati, Assam, India

Abstract: A combined dual-stage waste heat recovery system integrated to an internal combustion engine is studied. The system consists of high-temperature steam Rankine cycle (SRC) and a low-temperature organic Rankine cycle (ORC), both combined to recover the waste heat of the engine exhaust gases and engine coolant. In the ORC, organic working fluids R245fa, R600 and R601a are selected for analysis and sub-critical cycle adopted.

For the comparative study of the selected working fluids, energy and exergy analysis are conducted based on the engine data, pre-set parameters and mathematic model with net-output power, utilization rate, thermal efficiency and exergy efficiency as the objective functions for optimization.

Keywords: Heat recovery, combined system, Organic Rankine cycle, Exergy analysis

I. INTRODUCTION

Internal combustion engines (ICE), that converts energy from heat to work, has vast applications in road vehicles, marine transport, and power plants. In ICE, all the energy released during combustion of the fuel cannot be converted into useful work because of some thermodynamic limitations. About two-thirds of the total fuel combustion heat in automotive ICEs is wasted by the exhaust gases and engine coolant, resulting in energy waste and emission problem [1],[2],[3]. Recovering the waste energy could greatly improve the engine fuel efficiency and reduce environmental pollution.

As energy crisis and environment pollution are increasingly severe, many technologies have been proposed to save energy and reduce emission in the field of ICE.

Among these technologies, organic Rankine cycle (ORC) is an effective one because of its flexibility, economy and good thermal performance [4],[5]. Organic Rankine cycle (ORC) is seen as a high-effective way to recover the low-medium temperature heat (80°C to 300°C), such as biomass, solar, geothermal, and industry reject heat [6]. ORC has been also used in heat recovery systems of ICE [7]– [11].

These systems mainly use single-stage heat recovery. In ICE the waste heat released are at different temperatures, that is, exhaust gas temperature is high (450-600°C) while coolant temperature is low (80-85°C). Therefore, matching of the exhaust and coolant with organic working fluid is a problem.

In single-stage systems and the engine coolant was usually used as the preheating heat source, resulting in little utilization of the engine coolant waste heat. There are also issues of decomposition of organic working fluid and unsafe direct heat exchange with high temperature waste heat.

To solve these problems an integrated dual-stage is proposed, one to recover the high-temperature exhaust waste heat and the other to recover the heat from the low-temperature coolant.

The high-temperature stage uses steam Rankine cycle (SRC) with water as the working fluid to recover the heat from exhaust gases; the low-temperature stage uses an organic Rankine cycle (ORC) with an organic working fluid to recover the heat from engine coolant; and both the stages being integrated.

In this study, ORC working fluids R245fa, R600 and R601a are selected for the system's comparative analysis. For the selected working fluids, energy and exergy analysis are conducted based on the engine data, pre-set parameters and mathematic model with net-output power, utilization rate, thermal efficiency and exergy efficiency as the objective functions for optimization. The evaporator pressure, condenser pressure and mass flow rate are taken to be the decision variables.

II. DESCRIPTION OF SYSTEM

For the analysis, a commercial diesel engine is selected as the topping cycle. Main engine parameters are shown in Table 1. with the assumption of full load condition.

Table 1
Main Engine Parameters

Parameters	Unit	Value
Engine power output	(kW)	1000
Engine Efficiency	(%)	41.56
Exhaust gas temperature	(^o C)	565
Engine coolant temperature	(^o C)	83.5
Exhaust gases mass flow rate	(Kg/s)	1.135
Engine coolant mass flow rate	(Kg/s)	1.350

The configuration diagram of combined SRC-ORC system integrated with the ICE system is shown in Fig.1. The system comprises of a high-temperature stage employing a SRC circuit to utilize a large part of the exhaust heat and a low-temperature stage employing an ORC circuit to utilize the heat of coolant and remaining part of exhaust heat. The working fluids used in the SRC and ORC are water and organic fluid respectively. Water is effective in recovering high-temperature waste heat while organic fluid is more effective in recovering low-temperature waste heat. The SRC is a high temperature circuit that comprises of feed-water pump (P_H), evaporator (E_H), steam turbine (T_H) and condenser (C_H). The ORC is a low temperature circuit that consists of organic fluid pump (P_L), liquid-liquid heat exchanger (H_{L1}), evaporator (E_L), gas-gas heat exchanger (H_{L2}); vapour turbine (T_L) and water-cooled condenser (C_L). The two circuits are combined using the heat exchanger (E_L/C_H) behaving as evaporator for the ORC and condenser for SRC. In the SRC, high-pressure superheated steam is generated in the E_H by utilizing the heat of high-temperature exhaust gases of ICE, which is then expanded in the steam turbine T_H to produce mechanical work. The lower pressure steam is then condensed in E_L/C_H by giving off its latent heat to organic fluid of ORC. The water is then sent back to E_H by a feed-water pump. In the ORC, the high-pressure and low-temperature liquid organic fluid is heated in the H_{L1} by the hot cooling water of the ICE. The organic working fluid is then evaporated in the heat exchanger E_L/C_H by absorbing the latent heat of steam. The organic vapour generated is further superheated in H_{L2} by the remaining heat of exhaust gases that are at a lower temperature. The high-pressure organic fluid then expands in the vapour turbine T_L to produce mechanical work. The low-pressure vapour is then condensed in a condenser C_L by external cooling water. The liquid organic fluid is the sent to H_{L1} by a refrigerant pump. In Fig.1 the closed circuit 1-2-3-4-1 represents the state points of SRC while the closed circuit 6-7-8-9-10-6 the state points of ORC. The path $g_1-g_2-g_3$ represents the state points of exhaust gases while passing through E_H and H_{L2} sequentially. The path w_1-w_2 the state points of engine coolant (water) while passing through H_{L1} . The path w_3-w_4 the state points of cooling water while passing through C . The T-s diagram of the ORC processes are shown in Fig.2 and that of SRC in Fig.3

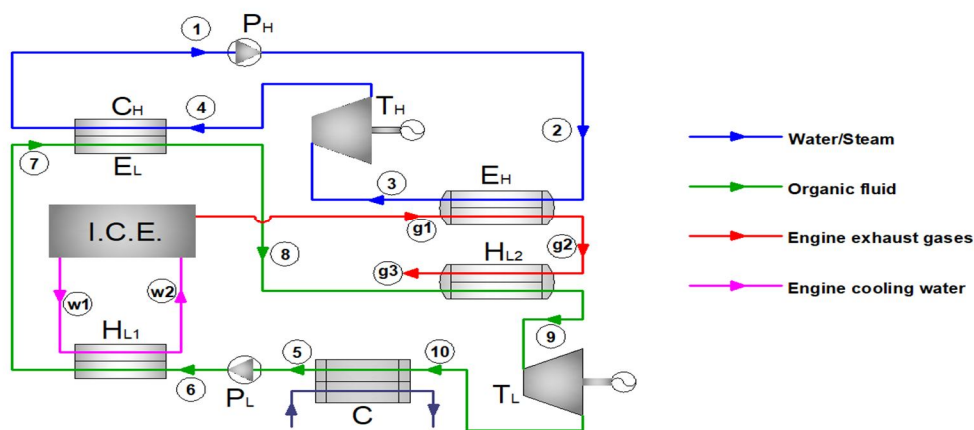


Fig.1 Configuration layout of engine waste heat recovery system

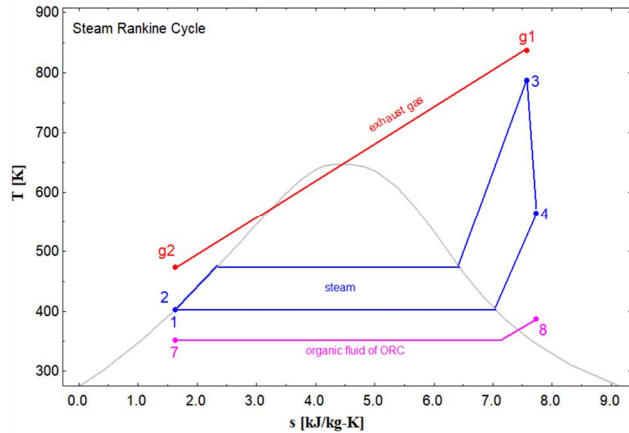


Fig.2. T-s diagram of the SRC system

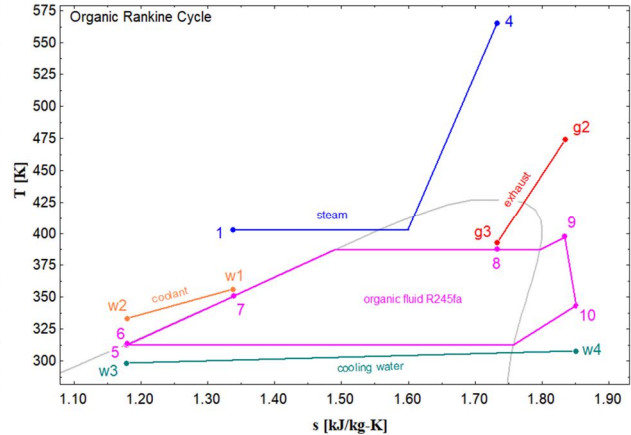


Fig.3. T-s diagram of the ORC system

System performance is significantly affected by the working fluid. The selection of criteria for sub-critical waste heat recovery having low-medium temperature, such as used in ORC, are good thermal and physical properties, high chemical stability safety and environmentally friendly [12]- [15]. Based on the selection criteria, three dry or isentropic organic fluids (refrigerants) are chosen to be used as working fluids in the ORC system. These are *R245fa*, *R600* and *R601a* (isopentane). These organic fluids have high decomposition temperature i.e., higher than the exhaust gas temperature.

III.MATHEMATICAL MODEL

The assumption for creating a mathematical model of the system are: processes are steady-flow; pressure drop and heat losses are neglected; kinetic and potential energy of working fluid are insignificant; ambient conditions are 298 K and 100 kPa; isentropic efficiencies of turbines are 0.85 and isentropic efficiencies of pumps are 0.75; the minimum pinch point of gas-liquid heat exchanger is 15 K and that of liquid-liquid heat exchanger 5 K; superheat of organic fluid is 10 K; condensation temperature of SRC is 403 K; condensation temperature of ORC 313 K; evaporation temperature of organic fluids in heat exchanger H_{L2} will depend on the temperature of exhaust gases entering heat exchanger and therefore the corresponding evaporation pressure will be different for each organic fluid; the temperature of exhaust gases leaving heat exchanger (H_{L2}) is constrained to 393 K in order to avoid the low-temperature corrosion [9]. The evaporation temperature of water in SRC is estimated after taking into consideration the pinch point with respect to exhaust gas temperature and the corresponding evaporation pressure is calculated.

Energy and exergy analysis are carried out for each component of the integrated system based on the first and second thermodynamic laws [16,17].

The exergy at each point i is calculated by using:

$$\dot{E}_i = \dot{m}[(h_i - h_0) - T_0 \cdot (s_i - s_0)] \tag{1}$$

where 0 implies the ambient state and \dot{m} , h , s , T implies mass flow rate, specific enthalpy, specific entropy, temperature respectively.

The mass flow rates of steam in SRC, organic fluid in ORC, exhaust gases, engine coolant and cooling water of condenser are designated by $\dot{m}_{f,src}$, $\dot{m}_{f,orc}$, \dot{m}_g , \dot{m}_w and \dot{m}_c respectively. h_i , T_i implies specific enthalpy and temperature respectively at every state point i as shown in Fig.1, Fig.2 and Fig.3.

For pump P_H :

The isentropic efficiency,

$$\eta_{P_H} = \frac{h_{2'} - h_1}{h_2 - h_1} \tag{2}$$

where 2' represents ideal point

Power consumed by pump

$$\dot{W}_{P_H} = \dot{m}_{f,src} \cdot (h_2 - h_1) \tag{3}$$

Exergy destruction due to irreversibility,

$$\dot{I}_{P_H} = \dot{E}_1 + \dot{W}_{P_H} - \dot{E}_2 \quad (4)$$

For evaporator E_H

Heat recovered from exhaust gases,

$$\dot{Q}_{g_1} = \dot{m}_{f,src} \cdot (h_3 - h_2) = \dot{m}_g \cdot c_{p_g} \cdot (T_{g_1} - T_{g_2}) \quad (5)$$

where c_{p_g} is specific heat of exhaust gases; T_{g_1} and T_{g_2} are inlet temperature and outlet temperature of exhaust gases respectively.

Exergy destruction due to irreversibility,

$$\dot{I}_{E_H} = (\dot{E}_2 + \dot{E}_{g_1}) - (\dot{E}_3 + \dot{E}_{g_2}) \quad (6)$$

For steam turbine T_H :

The isentropic efficiency,

$$\eta_{T_H} = \frac{h_3 - h_4}{h_3 - h_{4'}} \quad (7)$$

where 4' represents ideal point

Power produced,

$$\dot{W}_{T_H} = \dot{m}_{f,src} \cdot (h_3 - h_4) \quad (8)$$

Exergy destruction due to irreversibility,

$$\dot{I}_{T_H} = \dot{E}_3 - \dot{W}_{T_H} - \dot{E}_4 \quad (9)$$

For pump P_L :

The isentropic efficiency,

$$\eta_{P_L} = \frac{h_{6'} - h_5}{h_6 - h_5} \quad (10)$$

where 6' represents ideal point

Power consumed by pump,

$$\dot{W}_{P_L} = \dot{m}_{f,orc} \cdot (h_6 - h_5) \quad (11)$$

Exergy destruction due to irreversibility,

$$\dot{I}_{P_L} = \dot{E}_5 + \dot{W}_{P_L} - \dot{E}_6 \quad (12)$$

For heat exchanger H_{L1}

Heat recovered from engine coolant

$$\dot{Q}_w = \dot{m}_{f,orc} \cdot (h_7 - h_6) = \dot{m}_w \cdot c_{p_w} \cdot (T_{w_1} - T_{w_2}) \quad (13)$$

where c_{p_w} is specific heat of coolant (water); T_{w_1} and T_{w_2} are inlet temperature and outlet temperature of coolant respectively.

Exergy destruction due to irreversibility,

$$\dot{I}_{H_{L1}} = (\dot{E}_6 + \dot{E}_{w_1}) - (\dot{E}_7 + \dot{E}_{w_2}) \quad (14)$$

For evaporator E_L - condenser C_L :

$$\dot{Q}_f = \dot{m}_{f,src} \cdot (h_1 - h_4) = \dot{m}_{f,orc} \cdot (h_8 - h_7) \quad (15)$$

Exergy destruction due to irreversibility,

$$\dot{I}_{C_H-E_L} = (\dot{E}_4 + \dot{E}_7) - (\dot{E}_1 + \dot{E}_8) \quad (16)$$

For heat exchanger H_{L2}

Heat recovered from exhaust gases

$$\dot{Q}_{g_2} = \dot{m}_{f,orc} \cdot (h_9 - h_8) = \dot{m}_g \cdot c_{p_g} \cdot (T_{g_2} - T_{g_3}) \quad (17)$$

where T_{g_2} and T_{g_3} are inlet temperature and outlet temperature of exhaust gases respectively.

Exergy destruction due to irreversibility,

$$\dot{I}_{H_{L2}} = (\dot{E}_8 + \dot{E}_{g_2}) - (\dot{E}_9 + \dot{E}_{g_3}) \quad (18)$$

For vapour turbine T_L :

The isentropic efficiency,

$$\eta_{TL} = \frac{h_9 - h_{10}}{h_9 - h_{10'}} \quad (19)$$

where 10' represents ideal point

Power produced,

$$\dot{W}_{TL} = \dot{m}_{f,orc} \cdot (h_9 - h_{10}) \quad (20)$$

Exergy destruction due to irreversibility,

$$\dot{I}_{TL} = \dot{E}_9 - \dot{W}_{TL} - \dot{E}_{10} \quad (21)$$

For condenser C_L :

Heat rejected

$$\dot{Q}_c = \dot{m}_{f,orc} \cdot (h_{10} - h_5) = \dot{m}_c \cdot c_{pw} \cdot (T_{c_2} - T_{c_1}) \quad (22)$$

where T_{c_1} and T_{c_2} are inlet temperature and outlet temperature of cooling water respectively.

Exergy destruction due to irreversibility,

$$\dot{I}_c = (\dot{E}_{10} + \dot{E}_{c_1}) - (\dot{E}_5 + \dot{E}_{c_2}) \quad (23)$$

Parameters indicating system performance are utilization rates of engine exhaust waste heat ($\eta_{u,g}$) and coolant waste heat ($\eta_{u,w}$), net power output (\dot{W}_{net}), thermal efficiency (η_{th}), exergy efficiency (η_e).

$$\eta_{u,g} = \frac{\dot{Q}_{g_1} + \dot{Q}_{g_2}}{\dot{Q}_{g_{max}}} \quad (24)$$

where $\dot{Q}_{g_{max}}$ is the maximum heat available in the exhaust gases

$$\dot{Q}_{g_{max}} = \dot{m}_g \cdot c_{pg} \cdot (T_{g_1} - T_0) \quad (25)$$

$$\eta_{u,w} = \frac{\dot{Q}_w}{\dot{Q}_{w_{max}}} \quad (26)$$

where $\dot{Q}_{w_{max}}$ is the maximum heat available in the engine coolant

$$\dot{Q}_{w_{max}} = \dot{m}_w \cdot c_{pw} \cdot (T_{w_1} - T_0) \quad (27)$$

$$\dot{W}_{net} = (\dot{W}_{TH} - \dot{W}_{PH}) + (\dot{W}_{TL} - \dot{W}_{PL}) \quad (28)$$

$$\eta_{th} = \frac{\dot{W}_{net}}{\dot{Q}_{g_1} + \dot{Q}_{g_2} + \dot{Q}_w} \quad (29)$$

$$\eta_e = 1 - \frac{\dot{I}}{\dot{E}_{in}} \quad (30)$$

where

$$\dot{E}_{in} = (\dot{E}_{g_1} - \dot{E}_{g_3}) + (\dot{E}_{w_1} - \dot{E}_{w_2}) + \dot{W}_{PH} + \dot{W}_{PL} \quad (31)$$

$$\dot{I} = \dot{I}_{PH} + \dot{I}_{EH} + \dot{I}_{TH} + \dot{I}_{CH-E_L} + \dot{I}_{PL} + \dot{I}_{HL_1} + \dot{I}_{HL_2} + \dot{I}_{TL} + \dot{I}_c \quad (32)$$

For the comparative study of the selected working fluids, energy and exergy analysis are conducted based on the engine data (Table 1), pre-set parameters (assumptions) and mathematical model equations (1) to (32), with net-output power, utilization rate, thermal efficiency and exergy efficiency as the objective functions for optimization. The evaporator pressure, condenser pressure and mass flow rate are taken to be the decision variables. A code is written in EES [18] to simulate the system. EES has an in-built library of thermophysical properties of organic fluids that can be called to obtain thermodynamic properties at each state point of the system. Analysis and optimization are carried out on the simulated system to achieve the solutions. The simulation is run for each organic fluid selected for comparative performance solutions.

IV. PERFORMANCE ANALYSIS OF SYSTEM

Performances of R245fa, R600 and R601a are evaluated based on the assumptions and mathematical model. The evaporator pressure, condenser pressure and mass flow rate of steam in SRC system are evaluated as 1600 kPa, 269 kPa and 0.148 kg/s and is the same for analysis of each organic fluid. The optimum operating parameters i.e., evaporator pressure ($P_{b,orc}$), condenser pressure ($P_{c,orc}$) and mass flow rate (\dot{m}_f) of each organic working fluid in order to maximize the objective functions (performance parameters) are shown in Table 2. The evaporator pressure is the highest for fluid R600 whereas the condenser pressure is the lowest for R601a. The highest fluid mass flow rate is required for fluid R245fa.

Comparative performance of the working fluids i.e., net output power (\dot{W}_{net}), utilization rates of the engine exhaust waste heat ($\eta_{u,g}$) and coolant waste heat ($\eta_{u,w}$), thermal efficiency (η_{th}) and exergy efficiency (η_e) are depicted in Table 3. Comparative energy analysis of selected working fluid is shown in table 4. Comparative exergy analysis of selected working fluid i.e., irreversibility of each component is depicted in Table 5.

Table 2: Optimum operating parameters

Organic Fluid	$P_{b,orc}$ (kPa)	$P_{c,orc}$ (kPa)	\dot{m}_f (kg/s)
R245fa	1740	248	2.474
R600	2017	378	1.284
R601a	981	151	1.240

Table 3: Performance parameters of working fluids

Organic Fluid	\dot{W}_{net} (kW)	$\eta_{u,g}$ (%)	$\eta_{u,w}$ (%)	η_{th} (%)	η_e (%)
R245fa	142.61	82.32	39.68	21.38	54.24
R600	141.73	82.40	38.42	21.36	54.18
R601a	140.74	82.25	35.10	21.60	53.59

Table 4: Comparative energy analysis

Energy Source	R245fa		R600		R601a	
	(kW)	%	(kW)	%	(kW)	%
Exhaust gases	652	66.41	652	66.41	652	66.41
Coolant	330	33.59	330	33.59	330	33.59
Total	981	100.00	981	100.00	981	100.00
Energy Utilized						
Exhaust gases - SRC	439	44.70	439	44.70	439	44.7
Exhaust gases - ORC	98	9.97	98	10.03	97	9.88
Coolant - ORC	131	13.3	127	12.91	116	11.82
Energy Loss						
Exhaust gases	115	11.74	115	11.69	116	11.82
Coolant	199	20.26	203	20.68	213	21.71
Total	981	100.00	981	100.00	981	100.00
System Energy Transfer						
Energy In (Utilized)	667	100.00	663	100.00	652	100.0
Net Work	143	21.38	142	21.36	141	21.60
Energy Out	525	78.62	522	78.64	511	78.40
Total	667	100.0	663	100.00	652	100.00

The maximum net output power of the system is around 142 kW for all the fluids. As for the utilization rate of the exhaust waste heat ($\eta_{u,g}$), it is calculated to be around 82% for all the fluids. This is because the final outlet temperature of the exhaust is 120°C (acid dew point temperature), which means complete recovery of the exhaust waste heat is avoided to keep the temperature above this. The utilization rate of coolant heat is maximum fluid R245fa. As seen in Table 4, the thermal efficiencies of all the fluids are around 21%, since the energy utilization rate is more less the same for the all the fluids. The irreversibility of each component shows its influence on the system. It is obvious from Table 5, that evaporator (E_H) for all fluids makes the biggest contribution to the irreversibility of the whole system, due a large temperature difference on the organic fluid stream. The smallest exergy destruction is in feed-water pump P_h . Therefore, the heat exchange processes between the working fluids with the exhaust and engine coolant and non-isentropic expansion processes influence the system exergy performance most. Whereas, non-isentropic compression processes influence the system exergy performance least. Therefore, optimization of evaporator (E_H) is significant for improving system exergy performance, such as adjusting and optimizing its design parameters (pinch point temperature difference, type, material, layout and so on).

Table 5: Comparative exergy analysis

Exergy In	R245fa		R600		R601a	
	(kW)	%	(kW)	%	(kW)	%
Exhaust gases	264.53	92.38	264.66	92.13	264.42	93.41
Coolant	17.74	6.20	17.29	6.02	16.08	5.68
Pumps	4.07	1.42	5.33	1.85	2.57	0.91
Total	286.34	100.00	287.28	100.00	283.07	100.00
Exergy Destroyed						
Evaporator, E_H	58.34	20.37	58.34	20.31	58.34	20.61
Heat exchanger, E_L/C_H	21.71	7.58	21.78	7.58	21.11	7.46
Condenser, C_L	19.70	6.88	20.02	6.97	21.89	7.73
Vapour turbine, T_L	12.33	4.31	12.36	4.30	11.43	4.04
Heat exchanger, H_{L2}	7.41	2.59	7.42	2.58	7.47	2.64
Vapour turbine, T_H	6.43	2.25	6.43	2.24	6.43	2.27
Heat exchanger, H_{L1}	4.14	1.45	4.03	1.40	4.1	1.45
Organic fluid pump, P_L	0.90	0.31	1.2	0.42	0.54	0.19
Feed-water pump, P_H	0.05	0.02	0.05	0.02	0.05	0.02
Exergy Out						
Condenser	8.65	3.02	8.563	2.98	8.383	2.96
Turbines	146.68	51.23	147.06	51.20	143.31	50.63
Total	286.34	100.00	287.25	100.00	283.05	100.00

V. CONCLUSIONS

In this study, combined dual-stage waste heat recovery system integrated to an internal combustion engine is proposed which consists a high-temperature stage and a low-temperature stage. The high-temperature stage uses water to recover the high-temperature exhaust. The low-temperature stage uses an organic working fluid to recover the waste heat of the engine coolant, residual heat of the and low-temperature exhaust in series. Organic fluids R245fa, R600 and R601a are chosen as candidate working fluids of the low-temperature stage in this study. Based on energy and exergy analysis above, several conclusions: Maximum net output power and thermal efficiency are obtained with R245fa with corresponding values are 142.21 kW and 21.38

% at optimum evaporator pressure and condenser pressure of 1740 kPa and 248 kPa respectively. Maximum exergy efficiency of 51.23% is obtained for working fluid R245fa with maximum exergy destruction occurring in the evaporator. Based on net output power (\dot{W}_{net}), utilization rates of the engine exhaust waste heat ($\eta_{u,g}$) and coolant waste heat ($\eta_{u,w}$), thermal efficiency (η_{th}) and exergy efficiency (η_e) for all working fluids, R245fa is found to be a better working fluid.

REFERENCES

- [1] Caton JA. Operating characteristics of a spark-ignition engine using the second law of thermodynamics: effects of speed and load. SAE 2000-01-0952; 2000.
- [2] Danov SN, Gupta AK. 'Modeling the performance characteristics of diesel engine based combined-cycle power plants – part I: mathematical model' (2004), J Eng Gas Turbines Power; 126:28–34.
- [3] Danov SN, Gupta AK. 'Modeling the performance characteristics of diesel engine based combined-cycle power plants – part II: results and applications' (2004), J Eng Gas Turbines Power; 126:35–9.
- [4] Wei D, Lu X, Lu Z, Gu J. 'Performance analysis and optimization of organic Rankine cycle (ORC) for waste heat recovery' (2007), Energy Convers Management; 48:1113–9.
- [5] Desai NB, Bandyopadhyay S. Process integration of organic Rankine cycle. Energy 2009; 34:1674–86.
- [6] Quoilin S, Lemort V. Technological and economical survey of organic Rankine cycle systems. In: 5th European conference economics and management of energy in industry; 2009.
- [7] Bombarda P, Invernizzi CM, Pietra C. Heat recovery from Diesel engines: a thermodynamic comparison between Kalina and ORC cycles. Appl Therm Eng 2010;30:212–9.
- [8] Boretti A. Recovery of exhaust and coolant heat with R245fa organic Rankine cycles in a hybrid passenger car with a naturally aspirated gasoline engine. Appl Therm Eng 2012;36:73–7.
- [9] Vaja I, Gambarotta A. Internal Combustion Engine (ICE) bottoming with Organic Rankine Cycles (ORCs). Energy 2010;35:1084–93.
- [10] Ringler J, Seifert M, Guyotot V, et al. Rankine Cycle for Waste Heat Recovery of IC Engines. SAE 2009-1-0174; 2009.
- [11] Briggs TE, Wagner R, Edwards KD, et al. A waste heat recovery system for light duty diesel engines. SAE 2010-01-2205; 2010.
- [12] GequnShu , Xiaoning Li , Hua Tian , Xingyu Liang , Haiqiao Wei , XuWangb, 'Alkanes as working fluids for high-temperature exhaust heat recovery of diesel engine using organic Rankine cycle', Applied Energy 119 (2014) 204–217
- [13] Tian H, Shu G, Wei H, et al. Fluids and parameters optimization for the organic Rankine cycles (ORCs) used in exhaust heat recovery of Internal Combustion Engine (ICE). Energy 2012;47:125–36.
- [14] Qiu G. Selection of working fluids for micro-CHP systems with ORC. Renew Energy 2012;48:565–70.
- [15] Maizza V, Maizza A. Unconventional working fluids in organic Rankine cycle for waste energy recovery systems. Appl Therm Eng 2001;21:381–90.
- [16] Mago PJ, Chamra LM. Exergy analysis of a combined engine-organic Rankine cycle configuration. Proc IMechE, Part A: J Power Energy 2008;222:761–70.
- [17] Dai Y, Wang J, Gao L. Parametric optimization and comparative study of organic Rankine cycle (ORC) for low grade waste heat recovery. Energy Covers Manage 2009;50:576–82.
- [18] Klein SA. Engineering Equation Solver (EES), Academic version; 2006



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)