



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 9 Issue: IV Month of publication: April 2021

DOI: <https://doi.org/10.22214/ijraset.2021.33801>

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

IoT based Distributed Security System

Ram Shankar Tripathi¹, Bhagwati Charan Patel², Naveen Goel³

^{1,2}Department of Information Technology Department, SSTC, SSGI, Bhilai

³Department of Electrical and Electronics Engineering, SSTC, SSGI, Bhilai

Abstract: Motion detection is one of the key techniques for automatic video analysis to extract crucial information from scenes in video surveillance systems. The method of foreground and background detection start from second frame onwards it employs new object tracking method which detects and remove ghost objects rapidly while preserving abandon objects from decomposing into background. To detect motion and tracking of human presence and gave alarm, we used an internet of things (IOT) based method with Hidden Markov model. The Raspberry Pi is a minuscule device emblazoned with sentient to monitor on its own when the own camera board is slotted into it. The motion detector aids the camera to detect and save. Capture in-real-time is also a notary feature of this device. At the core of it, a notification is pinged every time the detection picks up noise. It's directed by a pre-coded python script. This also collects the average coordinate of points. In this way, a cost-value system is proposed into place. Given that the application sends data over the internet, it's a well thought out solution to the theft issue.

Keywords: Motion Detection, Internet of Things, Sensors, Image processing

I. INTRODUCTION

This document is a template. For questions on paper guidelines, please contact us via e-mail. Internet of Things (IoT) is a sentient being formed by the internet by its elements entitled to communication capabilities. It's ordered to connect, sense and communicate without getting too technical about its progress. IoT is present in various devices which can be used to help people in their lives and tools of the trade. The expectancy by 2020 that 20 billion users will be in focus with the internet. It's being used in various fields (auto machines, farming, Safety and health delivery) with low costs and high yields. It's also hoped to bring in a change of days with low energy usage, and more environment friendly.

It ushers in a new way of life for the today's world and seeks to replace many of the daily objects we use for our living, example ID cards are now cost effective and can be used easily without worry to the environment. This is a potential saver for the ubiquitous future of the world when it comes around.

Being engaged in the bustle of daily life, people have a tendency to be forgetful and mind their safety. This can be a big negative when they seek their objects of value, which can be materialistic or imaginary [1]. They are denied access to their way of comfort. It can be tracked with a complex like Raspberry Pi/, which again isn't a deep complex since the face scanning method is complex and hence cancels out the need for the Raspberry Pi and keeps the data scanning for longer periods of time.[2]. Upon detection, the system goes into a high notification priority and takes all measures to record and track it more accurately. The data can be used later for extra analysis from the user. The data will be fully complex for the user's viewing and all sorts can be found from. This enforces the idea of a better security system built in [3].

Home security data is often inaccurate to determine hence can't be used on big scale systems where monitoring is required continuously without stop and can't be of much help in crime cases [4]. Ultimately IoT helps users being in a focused environment and achieve the ideal connection and helps to bring better changes around.[5]. IOT based application can be used remotely to view the activity and get notification when motion is detected. Several applications will be presented, which are important to envisage some of the potential IOT. Some of these applications are: smart cities, smart energy, smart grid, agriculture and breeding, and pharmaceutical industry [6]. To integrate IOT in security systems to detect motion, for example every day when we are at work you will be able to monitor and get notifications if any activity happens at your home [7-8].

II. METHOD AND IMPLEMENTATION

The objective is to design a system which is self-smart and can assist the user in monitoring via other scripted applications. This project Remote Sensing using Internet of Things (IoT) is made by using Raspberry Pi B along with sensors like camera module, Infrared Sensor needed to be written with its desired OS.

The block of smart motion system shown in Fig. 1, in this system when the PIR sensor senses motion it gives a signal to the raspberry pi to take the image through USB camera and then send the image to email sever via the internet, so that the user can see the image that was taken. The system materials consist two parts: The hardware material part, and the software materials part.

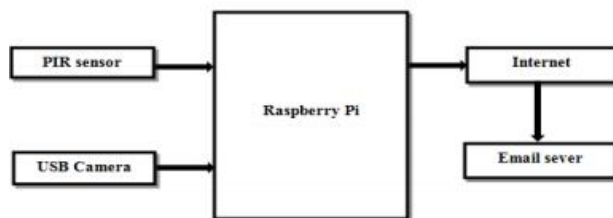


Fig. 1 Block diagram of motion detection system



Fig. 2 Raspberry pi 3 model B



Fig. 3 Instalment setup of Raspberry pi.

PIR Sensor PIR sensors is a pyroelectric device that sense motion by measuring changes in the infrared heat levels. PIR sensor is small, cheaper, low power consumption, easy to use. For that reason, it's commonly found in appliances and gadgets used in homes or businesses. When motion is detected used the breakout board to convert the signal into a longer digital signal, and output is a high signal on its output pin. This logic signal can be read by any embedded processor or used to drive a transistor to switch a higher current load [9]. It has three pins (VCC, GND and Output pin), it's generates +5v and -5v sine signal when any human or animal passes in front of the sensor or any movement is detected, the output of PIR sensor can be adjusted. For max, it can create an output signal for approximately 1.2 seconds [10]. This is more than enough to detect the signal.

The raspberry pi is a single board, low cost, credit card sized and small computer to capable of perform different functionalities such as identification and access control, electronics payment system, health application etc. Raspberry pi is a low power computer system running Linux (or several other operating systems) on an ARM processor architecture. The system boots from an SD card and an 8 GB SD card is more than enough to store the operating system and lots of data. It does not include a built-in hard disk or solid-state drive, but uses an SD card for booting and persistent storage. The power requirements are very modest and a simple 5 V phone charger with micro-USB plug is enough to run the system.

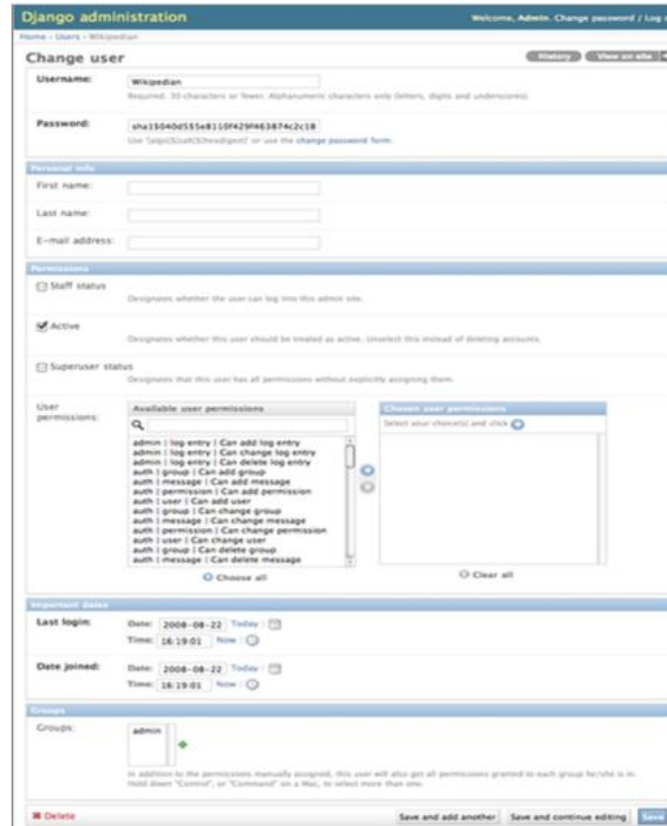


Fig. 4 Screenshot of the Django admin interface

The software is very stable (many units have been running non-stop for several months) and there are many general-purpose I/O pins (GPIO) available for interfacing to external devices. The device is a reasonably powerful computer on a credit card sized PCB [11]. It has a Broadcom BCM2835 system on a chip, this chip is a 32-bit which includes an ARM1176JZF-S Processor. Typical clock size is 700 MHz, performing at approximately 40 MFLOPS. Can be overclocked to 1GHz without any issues, Includes Video Core IV graphics processor w/ 1 billion pixels per second, Model A has 256 MB and Model B has 512MB of RAM is built into the board, not replaceable or upgradeable also include multiple built on I/O ports (100 MB/s Ethernet port HDMI port and RCA port Audio Jack) [12] [13]. The big advantage of the Raspberry Pi was that it could be put in places we couldn't put a PC. The Raspberry Pi being small as a credit card server still has the capabilities of working as a normal computer it can play 1080p resolution videos without lagging as depicted in Fig. 2.

After getting ready with SD Card insert it into Raspberry Pi Micro USB Power Cable is attached with it along with Raspberry Pi with monitor through HDMI cable. Connect Keyboard & Mouse with it. Also provide the DC power supply to Pi as shown in Fig. 3. Being connected with the main-work through IoT, the achievement lies in the usage of a minuscule system to detect and relay information while providing real-time output and data. There is a board on which in each direction IR sensor is placed. The direction in which motion is detected that side sensor gets activated and notification is sent to the user that some motion has been detected. This data is uploaded to server and gets cloud from where one can see that data and also can save that data. This whole thing we are doing by using language called Python. The software which we are using is Linux based and the server which we are using to cloud the data is Django. In order to open the terminals in Raspberry Pi we are using Putty. Corresponding to every sensor we will install libraries in our system.

Operation systems installed with Linux are enabled to access the Raspberry Pi framework and its counterpart, Raspian which provides access to programs not granted through the base version. So, for this report, Python script was used for scanning and relay. The language in which we are making this project is Python. The various support for codes, paradigms, OOP and its styles are why it was selected for the report. The server which we are using in our project is Django server, an open-source software, additionally providing admin-rights to edit file properties and modify the interface which is generated from the pre-baked models which is numbered as Fig. 4.

An internet browser is a file which relies on client server and the WWW/ HTTP index to make up Web parts for the users. To solve this problem, we have designed a system which do Remote Sensing using IoT. For this system we are using raspberry Pi B along with other sensors like camera and infrared sensors. Bearing an ARM 700 MHz processor, the Pi is equipped with a Broadcom BCM2835 on its board chip, 256MB of RAM, and Video Core IV GPU. Motion of object can be estimated by matching of blocks and use of interpretation.

Once the image frame is captured from videos then they can segment by background subtraction method. Object tracking is determined by noise points and the image date gathered. It's compiled using the Markov model, defining the evolving process of events varied by internal factors which are undetermined.

The state usually consists of the position and observation is displayed in the frame paused upon a particular time. The occurrence probability is shows using a dynamic element like constant velocity, constant acceleration.

$$p(x_k | x_1, \dots, x_{k-1}) = p(x_k | x_{k-1}) \tag{1}$$

$$p(z_k | x_1, \dots, x_k) = p(z_k | x_k) \tag{2}$$

As result

$$p(x_1 \dots x_k, z_1 \dots z_k) = p(x_1)p(z_1|x_1) \prod_{i=2}^k p(x_i|x_{i-1})p(z_i|x_i) \tag{3}$$

A binary mask is formed from the Gauss background minus method. It's a result from getting the temporal average and the intensity of the pixel over the the three RGB channels eq. (4) and (5). The background model is fed new data varying on the mask UM.

$$B_n = \begin{cases} \alpha \cdot V_{n-1}(s) + (1 - \alpha) \cdot I_n(s) & \text{if } s \notin um \\ B_{n-1}(s) & \text{if } s \in um \end{cases} \tag{4}$$

$$V_n = \begin{cases} \alpha \cdot V_{n-1}(s) + (1 - \alpha) \cdot (B_n(s) - I_n(s))^2 & \text{if } s \notin um \\ V_{n-1}(s) & \text{if } s \in um \end{cases} \tag{5}$$

The segmentation is done by comparing each pixel *s* in the input image *I_n* with the background model *B_n* in the three RGB channels. If the difference is greater than 3 times the standard deviation $\sqrt{V_n(s)}$ for at least one of the RGB channels, the pixel is marked as foreground in the segmentation mask, and background otherwise. then it marked as a foreground in the mask. It can be linked to a shadow. Likewise, the shadow detection picked up the thresholds 0.44 and 1.09 [6] for the distortion limit and 7 for the color. Eradicating noise is done by an erod morph operation with a 3 by 3 element.

All of these given steps are related to the idea of lining the background out. Real-world calculations, it's a failure if the background appears to be different. Hence it points out that the most used operation uses fixed cameras and a controlled environment. We have used the above method to detect and track motion with Python. Following are the steps taken to capture frame from the videos.

- 1) Over-loop the video time static image
- 2) Capture it and begin the occupied/unoccupied
- 3) Otherwise, the video endpoint is reached
- 4) Alter the frame dimensions, de-saturate it and add blur
- 5) If the first static image is None, initialize it
- 6) Determine the final difference between the first static and the current static image.

To implement IoT based motion detection following steps are considered.

- a) *Step 1:* The system is initialized and configured. The software of this project includes modules such as Videoining module, Motion detection module, alerting module, networking module, Web server module and actuators module. These modules are included just to recognize whether the original user is using the system or an intruder is trying to use.
- b) *Step 2:* It is then sent to the image and video processing module where the face and attributes of the person using the system is thoroughly checked and compared with the standards that is being set by the user through a wireless networking channel.
- c) *Step 3:* If the face and the attributes match with the prescribed standards, then the alerting module becomes inactive and the interrupt is driven to zero. If the face and attribute does not match with the standards then the interrupt is driven to one and the control is given to the admin warning system.
- d) *Step 4:* The image of the intruder is captured and it is recorded.
- e) *Step 5:* This image is then sent as message to the mobile phone of the user and also as an e-mail to the user given email-id. Then the security activation process is undertaken. The picture of the intruder is taken and is sent to the email which will clearly identify the image of the intruder.

III.RESULT AND DISCUSSION

All paragraphs must be indented. All paragraphs must be justified, i.e. both left-justified and right-justified. Keeping a Pi to the top of our study table to scan for noise in its area was our try-out. This scenario works with both, live and static videos but taken that, we used this complex on our work devices. Given background of our stream was unchanged over multiple pauses. So trying to model the background, we looked for changes and try to model our video based on a non-blur first frame due to the clarity offered. It's well detailed due to each frame's unique property, none can be the exact same. So, considering this, we needed to apply smoothing across 21x21 areas. We hoped to stabilize out motion detection formula in this way. In an instance, provided in a picture below, a still shot was taken, provided nothing in the foreground Fig. 5.

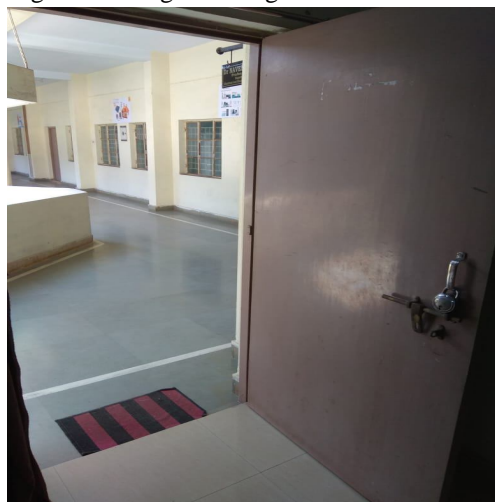


Fig. 5. Still shot image of the background

Frame meets the requirement of the static background- no foreground activity. Taking the minus between two statics can be seen in below Fig. 6. Pointing out that the actual image is black, and with the notion that, motion consisting area aren't black. This helps to bring out the motion scanned areas in the images normally having presence. Entry for frame delta was done based on this information. Two cases where the delta was less than 25, pixel was blackened. Otherwise, it was whitened. Instance of the is shown in Fig. 7. The background given is black while the rest is white.

Application of edge detection to the entry image for outlines was done This enabled us to see the resident motion and ad more elimination. It was scanned from the main door of the living residence and worked upon installation. From the explanation, it can be safely said that it's in full use and it's design doesn't hinder any event in the area of installation.

The python script executes and takes continuous snapshots from the camera till the motion is detected and automatically raspberry pi take image and save it into raspberry pi memory. It also starts to make a video of the same from the start till the end, 140 continuous photos are uploaded to the Django server as given in Fig. 8, as there may be a chance that the person might attempt to break the device itself. As the user would also get a notification of the motion detection, they can login remotely to the Raspberry Pi and check live output from the camera, which would verify the reason for the detection of motion.



Fig. 6. An instance of delta static, the comparison from the actual and the experimental static picture



Fig. 7. Delta Image is put on entry threshold to obtain a motion black-white image

age	job	marital	education	default	balance	housing	loan	contact	day	month	duration	campaign	pdays	previous	poutcome	target
30	unemployed	married	primary	no	1787	no	no	cellular	19	oct	79	1	-1	0	unknown	no
33	services	married	secondary	no	4789	yes	yes	cellular	11	may	220	1	339	4	failure	no
35	management	single	tertiary	no	1350	yes	no	cellular	16	apr	185	1	330	1	failure	no
30	management	married	tertiary	no	1476	yes	yes	unknown	3	jun	199	4	-1	0	unknown	no
59	blue-collar	married	secondary	no	0	yes	no	unknown	5	may	226	1	-1	0	unknown	no
35	management	single	tertiary	no	747	no	no	cellular	23	feb	141	2	176	3	failure	no
36	self-employed	married	tertiary	no	307	yes	no	cellular	14	may	341	1	330	2	other	no
39	technician	married	secondary	no	147	yes	no	cellular	6	may	151	2	-1	0	unknown	no
41	entrepreneur	married	tertiary	no	221	yes	no	unknown	14	may	57	2	-1	0	unknown	no
43	services	married	primary	no	-88	yes	yes	cellular	17	apr	313	1	147	2	failure	no
39	services	married	secondary	no	9374	yes	no	unknown	20	may	273	1	-1	0	unknown	no
43	admin.	married	secondary	no	264	yes	no	cellular	17	apr	113	2	-1	0	unknown	no
36	technician	married	tertiary	no	1109	no	no	cellular	13	aug	328	2	-1	0	unknown	no
20	student	single	secondary	no	502	no	no	cellular	30	apr	261	1	-1	0	unknown	yes
31	blue-collar	married	secondary	no	360	yes	yes	cellular	29	jan	89	1	241	1	failure	no
40	management	married	tertiary	no	194	no	yes	cellular	29	aug	189	2	-1	0	unknown	no
56	technician	married	secondary	no	4073	no	no	cellular	27	aug	239	5	-1	0	unknown	no
37	admin.	single	tertiary	no	2317	yes	no	cellular	20	apr	114	1	152	2	failure	no
25	blue-collar	single	primary	no	-221	yes	no	unknown	23	may	250	1	-1	0	unknown	no
31	services	married	secondary	no	132	no	no	cellular	7	jul	148	1	152	1	other	no
38	management	divorced	unknown	no	0	yes	no	cellular	18	nov	96	2	-1	0	unknown	no
42	management	divorced	tertiary	no	16	no	no	cellular	19	nov	140	3	-1	0	unknown	no
44	services	single	secondary	no	106	no	no	unknown	12	jun	109	2	-1	0	unknown	no
44	entrepreneur	married	secondary	no	93	no	no	cellular	7	jul	125	2	-1	0	unknown	no
26	housemaid	married	tertiary	no	543	no	no	cellular	30	jan	169	3	-1	0	unknown	no
41	management	married	tertiary	no	5883	no	no	cellular	20	nov	182	2	-1	0	unknown	no
55	blue-collar	married	primary	no	627	yes	no	unknown	5	may	247	1	-1	0	unknown	no
67	retired	married	unknown	no	696	no	no	telephone	17	aug	119	1	105	2	failure	no
56	self-employed	married	secondary	no	784	no	yes	cellular	30	jul	149	2	-1	0	unknown	no

Fig. 8. Captured and stored images in server

IV. CONCLUSION

The directive of the report, design and install a motion detection complex and connected to an application was done with success. It can withstand various environments and temperature sensitive areas. Users are informed about the data via an internet ping. It's done by a pre-coded python script and Pi embeds code. This complex can choose from both static and live motion pictures with presenting plethora of data to analyze from, in this instance, monitoring a living residence with live data being sent on the go.

REFERENCES

- [1] Zhao, Yanbo, Zhaohui Ye.(2008), A low cost GSM/GPRS based wireless home security system. *IEEE Transactions on Consumer Electronics*, 54(2):231-239.
- [2] Chowdhury, MdNasimuzzaman, MdShibleeNooman, and SrijonSarker.(2013), Access Control of Door and Home Security by Raspberry Pi Through Internet. *International journal of Science and Engineering Research*, 550-558, (2013)
- [3] Yun, Jaeseok, and Sang-Shin Lee.(2014), Human movement detection and identification using pyroelectric infrared sensors. *Journal of Sensors* 14(5): 8057-8081.
- [4] Hossain, Md Khaled, and Sayed SamialHaq.(2013), Detection of Car Pre-Crash with Human, Avoidance System & Localizing through GSM. *International Journal of Scientific and Research Publications* 3(7):1-4.
- [5] Vaidya, Rohit Ratnakar.(2015), Efficient Embedded Surveillance System with Auto Image Capturing and Email Sending Facility. *International Journal of Technical Research and Applications* ,109-112
- [6] Dahmane, M., Meunier, J.(2005), Real-time moving object detection and shadow removing in video surveillance. In: 3rd International Conference of SETIT, Tunisia.
- [7] Nguyen, Huu-Quoc.(2015), Low cost real-time system monitoring using Raspberry Pi. In: 2015 Seventh International Conference on Ubiquitous and Future Networks. *IEEE*, 2015., 857—859.
- [8] Abaya, Wilson Feipeng, (2014), Low cost smart security camera with night vision capability using Raspberry Pi and OpenCV. In: 2014 International conference on humanoid, nanotechnology, information technology, communication and control, environment and management (HNICEM). *IEEE*, 1—6.
- [9] Adam, Amit; Rivlin, Ehud; Shimshoni,(2006), Ilan. Robust fragments-based tracking using the integral histogram. In: 2006 IEEE Computer Society Conference on Computer Vision and Pattern Recognition (CVPR'06). *IEEE*, 798—805.
- [10] O. Boiman and M. Irani.(2005), Detecting irregularities in images and in video. *The Annals of Mathematical Statistics*, 11(4):462-469.
- [11] L. Baum, T. Petrie, G. Soules, and N. Weiss.(2016), A maximization technique occurring in the statistical analysis of probabilistic functions of markov chains. *The Annals of Mathematical Statistics*, 41(1):164-171.
- [12] E. L. Andrade, S. J. Blunsden, and R. B. Fisher. (2005), Characterisation of optical flow anomalies in pedestrian traffic. *The IEE International Symposium on Imaging for Crime Prevention and Detection*, pages 73-78.
- [13] A. R. Dick and M. J.(2013), Brooks. Issues in automated visual surveillance. *Proc. Of DICTA*, pages 195-204.
- [14] W. Hu, T. Tan, L. Wang, and S. Maybank. (2014), A survey on visual surveillance of object motion and behaviours. *IEEE Trans. on Systems, Man and Cybernetics*, 34(3):334-352.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)