



# IJRASET

International Journal For Research in  
Applied Science and Engineering Technology



---

# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 9      Issue: V      Month of publication: May 2021**

**DOI: <https://doi.org/10.22214/ijraset.2021.34825>**

**[www.ijraset.com](http://www.ijraset.com)**

**Call:  08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# Potential of *Strychnos Potatorum* and *Eirchorrnia Crassipes* in Treating Dyeing Industry Waste

P. Sivaraman<sup>1</sup>, S. Bharathidasan<sup>2</sup>

<sup>1</sup> PG Student, M. Tech Environmental Engineering, Prist University, Puducherry Campus, India.

<sup>2</sup> Head of the Department, Department of Civil Engineering, Prist University, Puducherry Campus, India.

**Abstract:** *The research aim is to the treatment of industrial dyeing waste water for the analysis of improved water treatment using natural coagulants. For waste water treatment, natural coagulants such as *Strychnos potatorum* (nirmali seeds) and *Eirchorrnia crassipes* (water hyacinth) are used. We have test the various properties of dyeing waste water before and after treatment like pH, sulphates, chlorides, total solids, total suspended solids (TSS), total dissolved solids (TDS), acidity, alkalinity, optimum coagulant dosage (jar apparatus), biological oxygen demand (BOD) and chemical oxygen demand (COD). The test results showed that natural coagulants produce better results when used alone or in conjunction with the chemical coagulant alum. Since the natural coagulant generates less floc, the cost of sludge treatment is reduced. Water hyacinth outperforms nirmali seed in terms of natural coagulants. Natural coagulants may be used to manage and treat the dyeing waste water, anywhere there is an abundance of it.*

**Keywords:** *Dyeing waste water, *Strychnos potatorum*, *Eirchorrnia crassipes*, efficiency of treatment.*

## I. INTRODUCTION

The contaminants in tannery wastes are inorganic, organic, and radioactive, and they must be thoroughly treated before disposal to avoid physical, chemical, and biological contamination of the receiving body of water. Every day, tannery wastewater with high concentrations of dissolved solids, suspended solids, chloride, colour, ammonia, and other contaminants is discharged into the receiving water. This document is a template. Industrial wastewater pollution is a big issue all over the world. In developing countries such as India, approximately 10% of industrial wastewater is treated before disposal. However, the remaining 90% of industrial wastewater is normally discharged untreated. Natural and Chemical Coagulants used for those projects. The main objective of this study is to evaluate the potential of *Strychnos potatorum* and *Eirchorrnia crassipes* as a natural coagulant in Dyeing industry waste water Treatment. The results are compared with Water treatment by Chemical Coagulant.

## II. LITERATURE REVIEW

Amirreza Talaiekhazani et al., (2020) Found that the efficiencies of COD removal by the UV/TiO<sub>2</sub>/Electroflotation microreactor are approximately 25% higher than those by the UV/TiO<sub>2</sub> microreactor and are more than 81% higher than those by the UV microreactor, using the HRTs of 15 and 30 min. The use of UV/TiO<sub>2</sub>/Electroflotation process could be useful for the treatment of high organic content wastewater to contribute to advanced wastewater technology needed in the future.

Pinapala Chanikya et al., (2021) found that Instantaneous current efficiency was found to increase with increase in persulfate concentration and with reduction in COD. EAOP followed by EC was found to be better approach than EC followed by EAOP as the former combination yielded higher COD reduction of 93.5% with lesser specific energy consumption and lesser sludge generation. Sludge generated after the treatment process was characterized using scanning electron microscopy (SEM), energy dispersive X-ray spectroscopy (EDS) and X-ray powder diffraction (XRD) techniques.

Yiqian Yuan et al., (2020) found that the treatment process and effluent, trichlorobenzene is the main pollutant and accounted for 39.51% of all CB. CB removal was found only in the anaerobic system, while the aerobic system did not have the corresponding removal effect on CB and total organic carbon. According to ecological risk assessment, CBs in effluent has not been found the significant potential harm to human health (AS < 1), but posed moderate ecological risk to aquatic ecosystem (RQs > 0.1).

## III. MATERIALS USED

### A. Chemical Coagulant

Alum used as a chemical coagulant for this work. When alum is added to water, it reacts with the water and results in positively charged ions. The ions can have charges as high as +4, but are typically bivalent.

### B. Natural Coagulant

- 1) *Strychnos Potatorum*: *Strychnos potatorum* (nirmali) is a medium-sized tree native to southern and central India, Sri Lanka, and Burma, and is primarily used as a traditional medicinal extract. According to Sanskrit writings from India, the seeds were used to explain turbid surface water over 4000 years ago, making them the first known plant-based coagulant used for water treatment.

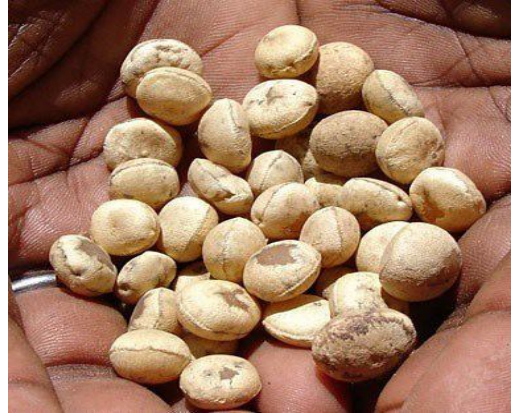


Figure 1: *Strychnos potatorum*

- 2) *Eichornia Crassipes*: Water hyacinth can reach a height of 1 metre above the water's surface thanks to its long, dense, glossy, ovate leaves. Water hyacinth is a free-floating perennial aquatic plant (or hydrophyte) native to South America's tropical and subtropical regions.



Figure 2: *Eichornia crassipes*

### C. Preparation of Natural Coagulant

- 1) *Strychnos Potatorum*
  - a) The seeds of the tree is collected and dried in sunlight.
  - b) Then the seeds are powdered and used as a coagulant.



Figure 3: Powdered form of Nirmali seeds



2) *Eichornia Crassipes*

- a) The collected water hyacinth root was extensively washed with tap water to remove soil and dust.
- b) The dried water hyacinth roots were sliced into pieces.
- c) The sliced material was dried by exposure to the sunlight for 3 days and subsequently at 80°C for 3 hours in a hot air convection oven.
- d) The dried material was milled into a powder using 'domestic mix'.
- e) The powder is used as coagulant and ready for use.



Figure 4: Powdered form of Water hyacinth

#### IV. EXPERIMENTAL INVESTIGATION

##### A. Jar Test

The following procedure followed to test waste water using jar test apparatus. Take 0.5 liter of sample in 4 beakers and keep in jar test apparatus. Switch on the motor and adjust the speed of the paddles.

- 1) Add various doses of alum (i.e.) 1ml, 2ml, 3ml, 4ml to different beakers.
- 2) Allow flash mix rapidly for 1 minute
- 3) Reduce the speed of the paddles and continue it for 10 minutes
- 4) Switch off the motor and allow the solution to settle for 20 minutes
- 5) Measure the amount of sludge produced at the bottom
- 6) Draw the graph between amounts of alcohol added to sludge produced. From the notes the ideal dosage of coagulant.



Figure 5: Jar test

##### B. Characteristics of Dyeing Waste

The properties of Dyeing industry waste water before treatment test and the results shows that, the dyeing industry waste have pH 7.35, Turbidity 15 NTU, Chlorides 767 mg/lit, Alkalinity 134 mg/lit, Acidity 131 mg/lit, total Suspended Solids 2581 mg/lit, Total Dissolved solids 1765 mg/lit, Biological Oxygen demand 690 mg/lit and Chemical oxygen demand 1932 mg/lit.

**C. Dosage of Chemical and Natural Coagulants**

The results of this experiment indicate that natural coagulants outperform alum. According to the findings, Eichornnia crassipes (water hyacinth) outperforms Strychnos potatorum (nirmali seeds). It lowers the pH and turbidity of the waste water. The water used for treatment in this case is washing water from the textile industry. This water can be used for washing, watering, and other uses after it has been handled. The dosage of chemical and mineral Admixture given in following table 1 to 3 respectively.

S. No	Coagulant dosage(gm)	Floc formation(ml)
1	0.5	15
2	1	25
3	1.5	30
4	2	38

Table 1: Optimum Dosage of Chemical Coagulant

S. No	Coagulant dosage (gm)	Floc formation(ml)
1	3	18
2	3.5	10
3	4	15
4	4.5	20

Table 2: Optimum Dosage of Strychnos potatorum

S. No	Coagulant dosage (gm)	Floc formation(ml)
1	4	8
2	5	18
3	6	20
4	7	25

Table 3: Optimum Dosage of Eichornnia crassipes

Efficiency of Chemical and natural coagulant in treating dyeing waste were given below as figures. The results shows that there was a increase in efficiency while using alum as chemical coagulant in treating industrial waste water by comparing natural coagulant.

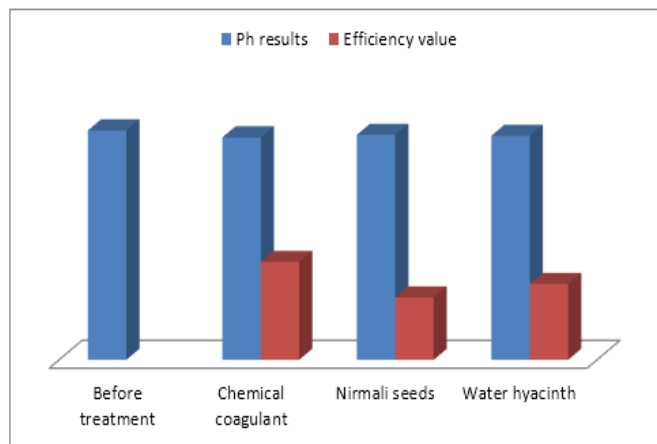


Figure 6: efficiency value of pH in waste water

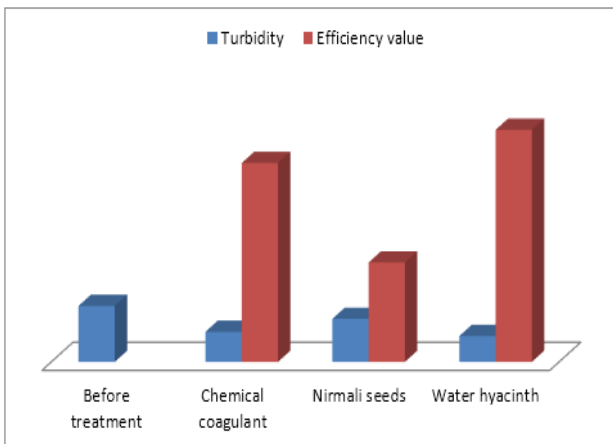


Figure 7: efficiency value of Turbidity in waste water

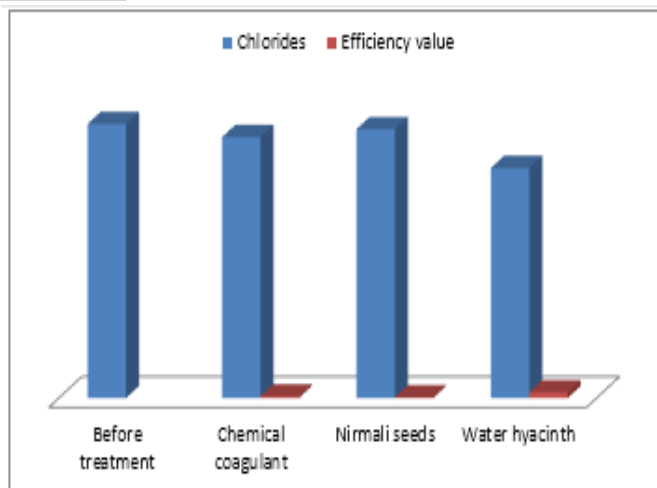


Figure 8: efficiency value of Chlorides in waste water

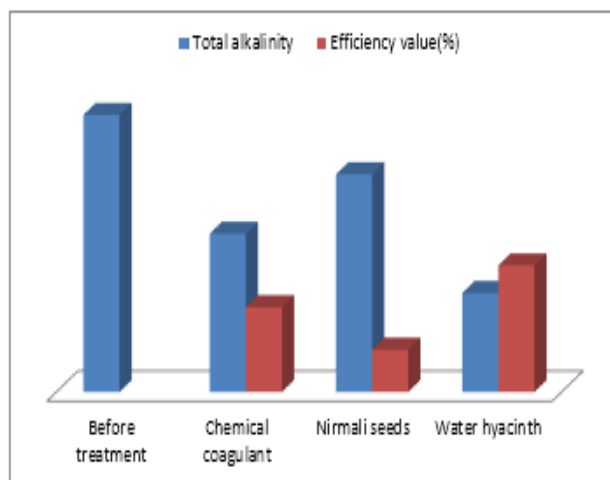


Figure 9: efficiency value of Alkalinity in waste water

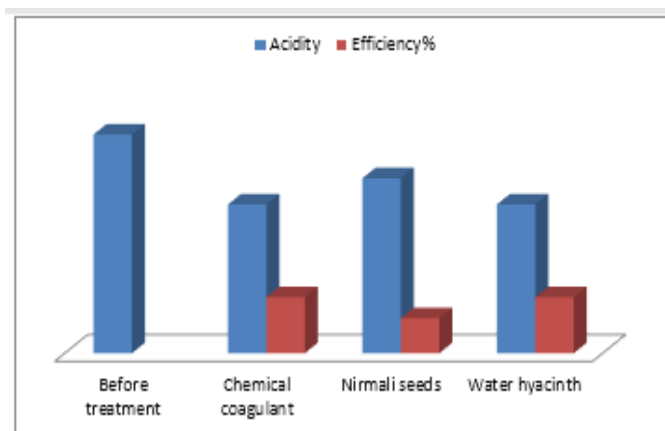


Figure 10: efficiency value of Acidity in waste water

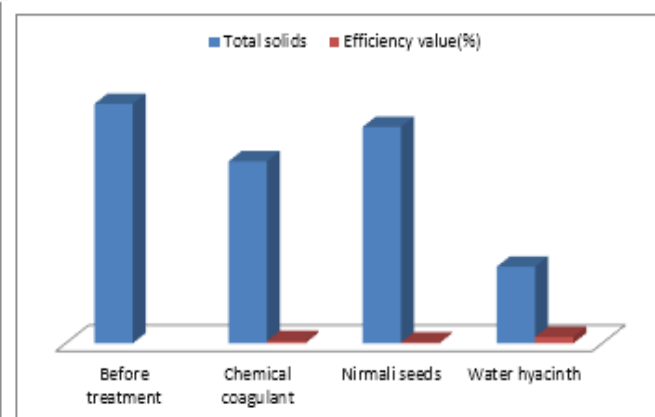


Figure 11: efficiency value of TSS in waste water

## V. CONCLUSION

The following conclusions drawn at the end of this current study

- A. Natural coagulants extracted from plant sources reflect a significant advancement in ‘grassroots’ sustainable environmental technology since it focuses on improving the quality of life for underdeveloped communities.
- B. By using *Eichornia crassipes* as a natural coagulant, the treated waste water produces better results. The best results are obtained by combining natural coagulants in the proper proportions and determining the optimal coagulant dose.
- C. The use of *Eichornia crassipes* decreases the amount of sludge generated in waste water treatment compared to chemical coagulants, and it is environmentally friendly and biodegradable.

## REFERENCES

- [1] Amireza Talaiekhazani, Mohammad Reza Mosayebi, Mohamad Ali Fulazzaky, Zeinab Eskandari, Reza Sanayee, Combination of TiO<sub>2</sub> microreactor and electroflotation for organic pollutant removal from textile dyeing industry wastewater, Alexandria Engineering Journal, Volume 59, Issue 2, 2020, Pages 549-563, ISSN 1110-0168, <https://doi.org/10.1016/j.aej.2020.01.052>.
- [2] Pinapala Chanikya, P.V. Nidheesh, D. Syam Babu, Ashitha Gopinath, M. Suresh Kumar, Treatment of dyeing wastewater by combined sulfate radical based electrochemical advanced oxidation and electrocoagulation processes, Separation and Purification Technology, Volume 254, 2021, 117570, ISSN 1383-5866, <https://doi.org/10.1016/j.seppur.2020.117570>.
- [3] Yiqian Yuan, Xun-an Ning, Yaping Zhang, Xiaojun Lai, Danping Li, Zili He, Xiaohui Chen, Chlorobenzene levels, component distribution, and ambient severity in wastewater from five textile dyeing wastewater treatment plants, Ecotoxicology and Environmental Safety, Volume 193, 2020, 110257, ISSN 0147-6513, <https://doi.org/10.1016/j.ecoenv.2020.110257>.

- [4] Zhishu Liang, Jijun Wang, Yuna Zhang, Cheng Han, Shengtao Ma, Jiangyao Chen, Guiying Li, Taicheng An, Removal of volatile organic compounds (VOCs) emitted from a textile dyeing wastewater treatment plant and the attenuation of respiratory health risks using a pilot-scale biofilter, *Journal of Cleaner Production*, Volume 253, 2020, 120019, ISSN 0959-6526, <https://doi.org/10.1016/j.jclepro.2020.120019> .
- [5] Tao Wang, Xiaomin Tang, Shixin Zhang, Jie Zheng, Huaili Zheng, Ling Fang, Roles of functional microbial flocculant in dyeing wastewater treatment: Bridging and adsorption, *Journal of Hazardous Materials*, Volume 384, 2020, 121506, ISSN 0304-3894, <https://doi.org/10.1016/j.jhazmat.2019.121506> .
- [6] Hualing Cai, Jieying Liang, Xun-an Ning, Xiaojun Lai, Yang Li, Algal toxicity induced by effluents from textile-dyeing wastewater treatment plants, *Journal of Environmental Sciences*, Volume 91, 2020, Pages 199-208, ISSN 1001-0742, <https://doi.org/10.1016/j.jes.2020.01.004> .
- [7] Hongjie Zhou, Lyu Zhou, Keke Ma, Microfiber from textile dyeing and printing wastewater of a typical industrial park in China: Occurrence, removal and release, *Science of The Total Environment*, Volume 739, 2020, 140329, ISSN 0048-9697, <https://doi.org/10.1016/j.scitotenv.2020.140329> .
- [8] Aminoddin Haji, Maryam Naebe, Cleaner dyeing of textiles using plasma treatment and natural dyes: A review, *Journal of Cleaner Production*, Volume 265, 2020, 121866, ISSN 0959-6526, <https://doi.org/10.1016/j.jclepro.2020.121866> .
- [9] Thu Huong Nguyen, Takahiro Watari, Masashi Hatamoto, Dausike Sutani, Tjandra Setiadi, Takashi Yamaguchi, Evaluation of a combined anaerobic baffled reactor-downflow hanging sponge biosystem for treatment of synthetic dyeing wastewater, *Environmental Technology & Innovation*, Volume 19, 2020, 100913, ISSN 2352-1864, <https://doi.org/10.1016/j.eti.2020.100913> .
- [10] Mir Ferdous Chowdhury, Shahjalal Khandaker, Forkan Sarker, Aminul Islam, Mir Tamzid Rahman, Md. Rabiul Awual, Current treatment technologies and mechanisms for removal of indigo carmine dyes from wastewater: A review, *Journal of Molecular Liquids*, Volume 318, 2020, 114061, ISSN 0167-7322, <https://doi.org/10.1016/j.molliq.2020.114061> .
- [11] Lijun Meng, Minjie Wu, Haisheng Chen, Yu Xi, Manhong Huang, Xubiao Luo, Rejection of antimony in dyeing and printing wastewater by forward osmosis, *Science of The Total Environment*, Volume 745, 2020, 141015, ISSN 0048-9697, <https://doi.org/10.1016/j.scitotenv.2020.141015> .
- [12] Xuejiao Hu, Yue Hu, Guizhou Xu, Meng Li, Yuanting Zhu, Lu Jiang, Yizhou Tu, Xingqi Zhu, Xianchuan Xie, Aimin Li, Green synthesis of a magnetic  $\beta$ -cyclodextrin polymer for rapid removal of organic micro-pollutants and heavy metals from dyeing wastewater, *Environmental Research*, Volume 180, 2020, 108796, ISSN 0013-9351, <https://doi.org/10.1016/j.envres.2019.108796> .
- [13] Xi Lu, Zhenyu Li, Yu'an Liu, Bin Tang, Yanchao Zhu, Joselito M. Razal, Esfandiar Pakdel, Jinfeng Wang, Xungai Wang, Titanium dioxide coated carbon foam as microreactor for improved sunlight driven treatment of cotton dyeing wastewater, *Journal of Cleaner Production*, Volume 246, 2020, 118949, ISSN 0959-6526, <https://doi.org/10.1016/j.jclepro> .
- [14] Luana Marcele Chiarello, Mateus Mittersteiner, Paulo Cesar de Jesus, Jürgen Andreus, Ivonete Oliveira Barcellos, Reuse of enzymatically treated reactive dyeing baths: Evaluation of the number of reuse cycles, *Journal of Cleaner Production*, Volume 267, 2020, 122033, ISSN 0959-6526, <https://doi.org/10.1016/j.jclepro.2020.122033> .
- [15] Regilene de Sousa Silva, Heloisa Ramlow, Carolina D'Ávila Kramer Cavalcanti, Rita de Cassia Siqueira Curto Valle, Ricardo Antonio Francisco Machado, Cintia Marangoni, Steady state evaluation with different operating times in the direct contact membrane distillation process applied to water recovery from dyeing wastewater, *Separation and Purification Technology*, Volume 230, 2020, 115892, ISSN 1383-5866, <https://doi.org/10.1016/j.seppur.2019.115892> .
- [16] Jie Zheng, Xiaomin Tang, Shixin Zhang, Ting Huang, Huaili Zheng, Bin Sun, Relationship between the structure of chitosan-based flocculants and their performances in the treatment of model azo dyeing wastewater, *Chemosphere*, Volume 247, 2020, 125920, ISSN 0045-6535, <https://doi.org/10.1016/j.chemosphere.2020.125920> .
- [17] Angelika Tkaczyk, Kamila Mitrowska, Andrzej Posyniak, Synthetic organic dyes as contaminants of the aquatic environment and their implications for ecosystems: A review, *Science of The Total Environment*, Volume 717, 2020, 137222, ISSN 0048-9697, <https://doi.org/10.1016/j.scitotenv.2020.137222> .





10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)