



IJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 9 Issue: VI Month of publication: June 2021

DOI: <https://doi.org/10.22214/ijraset.2021.34963>

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Light Monitoring System using Z-Score Analysis

Banala Krishna Gopal¹, Panthangi Sai Likith², Thota Chandu³, V. Seetharama Rao⁴, Mr. SI Khan⁵

^{1, 2, 3}B.Tech 4th year, ECE, Sreenidhi Institute of Science and Technology

⁴Assistant Professor, ECE, Sreenidhi Institute of Science and Technology

⁵Associate Professor, ECE, Sreenidhi Institute of Science and Technology

Abstract: *In today's modern world where everything is being automated and security is a growing concern, we made an automated module to live-monitor the anomalies in any provided space at all times to ensure security in our personal space. By implementing our project, we can monitor anything important which would be out of our reach at the moment with a live alert system through which we can identify any anomalies. In our proposed system we integrated Machine Learning to work with an IoT system by using Bolt Wi-Fi module which also uses an LDR sensor to detect the light intensity, here LDR is used specifically to better understand the Z-Score analysis. We are using ML to do an analysis known as Z-Score, which processes a math equation to detect anomalies. This analysis is done to predict a frame of upper and lower boundaries for the light intensity. Eventually, when the LDR sensor value i.e., light intensity goes out of range in a room, it generates Real-Time alerts in the form of an SMS alert which will be directed to the user's mobile phone through Twilio. This alert system is an advanced way to increase the work efficiency of any live monitoring system as the ML is always working to increase accuracy. In our project, this system specifically uses Light Dependent Resistor to detect changes in light intensities, but this can be implemented for any sensor to detect.*

Keywords: *Internet of Things, Machine Learning, Bolt module, LDR, Z-Score Analysis, SMS, Twilio.*

I. INTRODUCTION

Over the span of late years, the Internet of Things (IoT) has been a creating design for most new organizations. Furthermore, various tremendous and medium endeavors rely upon IoT things for an understandable course of action. Regardless, the reality of the situation is, the IoT is amazing and there are limitless issues while building an IoT thing. As demonstrated by Verizon's report 'Area of Market: Internet of Things 2016,' "Making, executing and managing IoT applications is a perplexing association including sensors, phones, secure association accessibility, amassing, Big Data examination, to scale new organizations, and on-going joining or tweaking. Most undertakings, paying little psyche to appraise, don't have these limits and capacities in-house to make the IoT a reality."

This winds up being a huge detriment of IoT applications, which is the explanation the IoT is still excessively far for certain endeavors. Gigantic Data assessment, ability to scale new organizations, and on-going blend and adjusting. Most undertakings, paying little psyche to assess, don't have these capacities and capacities in-house to make the IoT a reality." This winds up being a critical drawback of IoT applications, which is the explanation the IoT is still excessively far for certain endeavors. It should be stacked up with proper characteristics perform. Missing characteristics for numerical properties, for instance, the expense of the house may be superseded with the mean worth of the attribute however missing characteristics for obvious credits may be replaced with the property with the most raised mode.

This interminably depends upon such channels we use. Accepting data is as text or pictures, transforming it over to numerical construction will be required, be it a once-over or bunch or structure. Just, Data is to be made appropriate and solid. It is to be changed over into an association sensible by the machine.

Bolt Cloud stage enables you to screen and control devices from wherever in the world. With customer access the board structure fused into Bolt's secured Cloud stage, sharing straightforward. Cloud Control Panel gives you incorporates like getting last alive time stamps, present status of the contraption, push over-the-air refreshes and that is only the start. Pre-related with Cloud The certified power of Bolt comes from its Cloud. Bolt gear chip is pre-related with Bolt Cloud, which permits you quickly to send data insight and assessment. Bolt has an eminent data insight and assessment structure considering its obtained pre-created data portrayal organization that followers' data into important information and gives you essential encounters from your data. Bolt has enhanced APIs that let you set up and regulate devices with irrelevant effort.

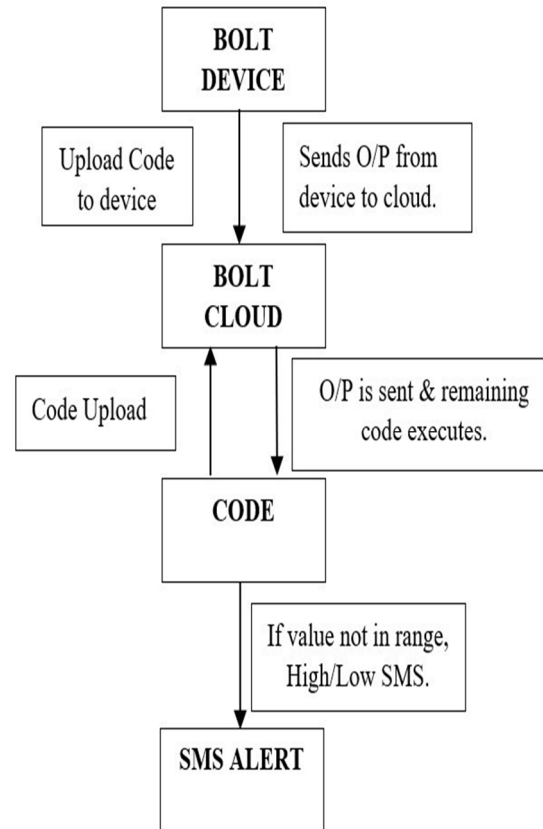


Fig-1: Block diagram

II. LITERATURE SURVEY

- A. This paper discusses the k-NN tests utilizing a Hilbert Space Filling Curve, in addition this strategy needs accurately $p+1$ (where p is the dataset length) examines out of 39 datasets, additionally this system is limitation for for high-dimensional and appropriated dataset. This technique is applied successfully to thickness-based methodologies for certain limitations. The dataset used in approach contains blended property that cover oddities, Distance-based methods neglect gauge inconsistencies dependent on worldwide peculiarity standard. In Knorr et al work, projected a k-NN technique, inside the predetermined length, p closest neighbors considered as not an abnormality point. In the following article, if the information point is considered as abnormality in the event that it is $p\%$ a long way from the predefined length. Projected methodologies increment the intricacy investigation and basically it is hard to applying for enormous datasets.
- B. According to this paper the energy signature (ES) a notable strategy for the investigation of building energy utilization. It has been generally utilized for portraying energy or warmth request practices of structures in different investigations. utilized ES strategies for climate rectification which means to standardize energy a structure's normal long-haul execution. In, a comparative methodology is applied to the whole DH organization. Single warmth power signature each year was plotted from heat load estimations of the relative multitude of structures associated with the organization to think about various warmth seasons. ES based techniques have additionally been applied for the assessment of the measure of warmth misfortunes because of transmission and ventilation by evaluating the structures' complete warmth misfortune coefficient. Likewise, they have been examined to accurately assess balance temperature to isolate request from space warming and homegrown boiling water. This is the information that lead to Z-score analysis of finding the detection of any say fire or light detection can be done using this technology.

- C. This paper manages Solar force frameworks and their connected innovations have formed into an around the world used environmentally friendly power fuel source. Given the generally high establishment costs, low transformation rates and battery limit issues, sun powered energy is as yet not a broadly applied fuel source when contrasted with customary fuel sources. Regardless of the difficulties, there are numerous imaginative investigations of new materials and new strategies for improving sun-based energy change effectiveness to improve the intensity of sun-oriented energy in the commercial Centre. This examination looks for encouraging sun-based force advancements by text mining 2280 worldwide licenses and 5610 writing papers of the previous decade (January 2008 to June 2018). Initial, a sun-based force information philosophy blueprint (or a key term relationship map) is developed from the thorough writing and patent survey. Non-managed AI procedures for grouping licenses and writing joined with the Latent Dirichlet Allocation (LDA) subject demonstrating calculation recognize sub-innovation bunches and their principal themes. A word-inserting calculation is applied to distinguish the patent archives of the predefined innovations. Cross-approval of the outcomes is utilized to show the innovation progress with a patent advancement map. Beginning investigation show that a large number spotlight on sunlight-based hydropower stockpiling frameworks, moving light created capacity to waterpower gravity frameworks. Batteries are likewise utilized yet have a few limits. The destinations of this examination are to survey sun-oriented innovation advancement advance and depict the development way that has advanced for the sun-based force space. By embracing unaided learning approaches for writing and patent mining, this examination fosters a novel innovation e-revelation technique and presents the point-by-point surveys and investigations of the sun-based force innovation utilizing the proposed e-disclosure work process. The experiences of worldwide sun powered innovation improvement, in light of both far reaching writing and patent audits and cross-investigations, helps energy organizations select cutting edge innovations identified with their key specialized R&D qualities and business interests. The organized sun based related innovation mining can be reached out to the investigation of different types of environmentally friendly power advancement.
- D. The android application (called “ECG Android App”) is developed for the healthcare area which is primarily based on internet of things & cloud. Which provides the end user with visualization of their electro cardiogram (ECG) waves and records logging functionality in the background. The logged information can be uploaded to the user’s private centralized cloud which can be screen by using patients as nicely as doctors. This paper gives some crucial ideas of IOT. similarly, there are more technologies used: IOIO microcontroller, signal processing, communication protocols, impervious and efficient mechanisms for massive file transfer, records base management system, and the centralized cloud. Infrastructure is additionally beneficial for other healthcare domain development.

III. HARDWARE REQUIREMENTS

A. Bolt Wi-Fi Module

Wi-Fi Microcontroller module is a simple interface to rapidly associate your equipment to cover over GPIO, UART, and ADC. Hearty correspondence Bolt is outfitted with industry standard conventions to guarantee a Secure and quick correspondence of your gadget information with the cloud. Bolt is a completely coordinated IoT stage for engineers that assists them with building IoT tasks and items rapidly and without any problem. It is a stage intended for Makers and Developers to assemble IoT Projects. Bolt is probably the most ideal approaches to begin with your IoT advancement and furthermore to learn IoT. Watch this image to get a speedy outline of the Bolt IoT Platform. Bolt offers a Wi-Fi module and a cloud stage. The Bolt cloud, straightforwardly and by means of APIs, allows you to store information, run examination on it, and envision the information as charts. You can send cautions through SMS and E-Mail when the deliberate qualities pass boundaries. The Bolt cloud as of now additionally upholds an incredible dashboard for gadget the board just as online design and code supervisor. This empowers fast prototyping of IoT use cases which permits clients to associate straightforward equipment and chart their information right away. Bolt additionally allows you rapidly to run Machine Learning Algorithms to foresee your IoT Data just as distinguish oddity.

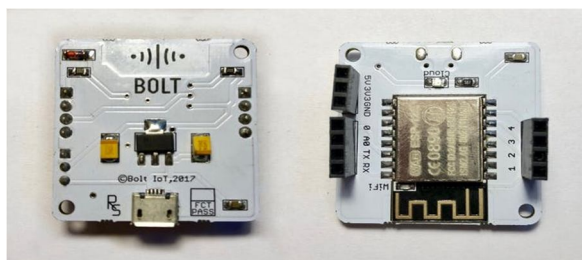


Fig-2: Bolt Wi-Fi module

B. Light Dependent Resistors (LDR)

An electronic segment like LDR or light-subordinate resistor is receptive to light. When light beams drop on it, at that point quickly the opposition will be changed. The obstruction upsides of a LDR may change more than a few significant degrees. The obstruction worth will be dropped when light level increments. The planning of LDRs should be possible by utilizing semiconductor materials to permit their light-touchy properties. The celebrated material utilized in this resistor is CdS (cadmium sulphide), despite the fact that the use of this material is at present limited in European nations because of some natural issues while utilizing this material. Moreover, CdSe (cadmium selenide) is likewise confined and extra materials that can be utilized primarily incorporate PbS (lead sulphide), InS (indium antimonide). Despite the fact that for these resistors, a semiconductor material is utilized, in light of the fact that they are essentially aloof gadgets and they don't have a PN-intersection. This isolates them from other LDRs like phototransistors and photodiodes.

The functioning rule LDR is photoconductivity, which is only an optical wonder. At the point when the light is consumed by the material then the conductivity of the material improves. At the point when the light falls on the LDR, at that point the electrons in the valence band of the material are anxious to the conduction band. Be that as it may, the photons in the occurrence light should have energy better than the bandgap of the material to take the electrons leap starting with one band then onto the next band (valance to conduction). Hence, when light having ample energy, more electrons are excited to the conduction band which grades in a large number of charge carriers. When the effect of this process and the flow of the current starts flowing more, the resistance of the device decreases.



Fig-3: Light Dependent Resistor

C. Bread Board, Connecting Wires and Resistors

Usage of basic requirements like bread board, connecting wires and a 10Kilo ohm resistor are required to implement the hardware design.

IV. WORKFLOW

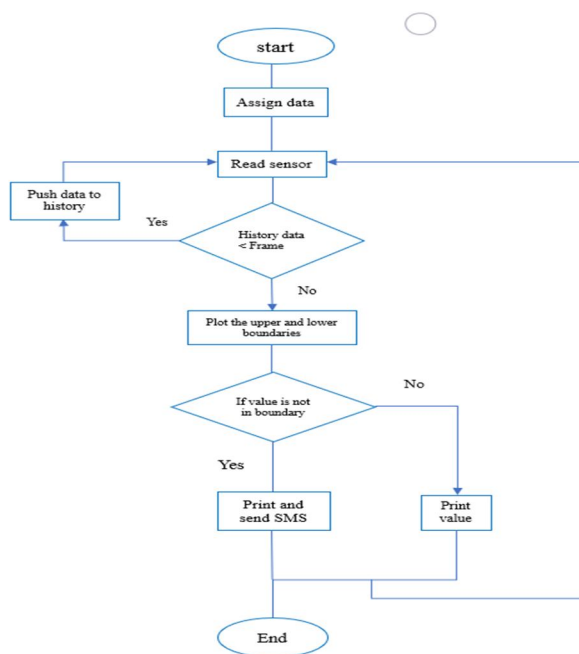


Fig-4: Workflow diagram

V. METHODOLOGY

Create an account in Bolt cloud and Linking Bolt device to cloud. Create a ubuntu operating system point in digital ocean. Access Cloud server using putty in windows by entering the IP address of ubuntu system which you receive in a mail from digital ocean team. Now you will be in the ubuntu system's terminal. Create folder to add the python code files in the folders. Once you run the python code the LDR sensor values are sent to cloud and your terminal will receive them and will be displayed in the terminal window. The code will compute the boundary values at regular intervals once the number of values to compute the boundary are received then if the received sensor value is in the range of those computed boundaries it will just output the sensor reading otherwise a message is received to the given number that the value is not in range. Depending upon, whether the value being above the upper boundary and lower than the lower boundary the message context depends like "lights turned on and lights turned off" will be received. This is how we receive a status regarding the light intensity from a Mobile or an PC via SMS.

VI. RESULTS

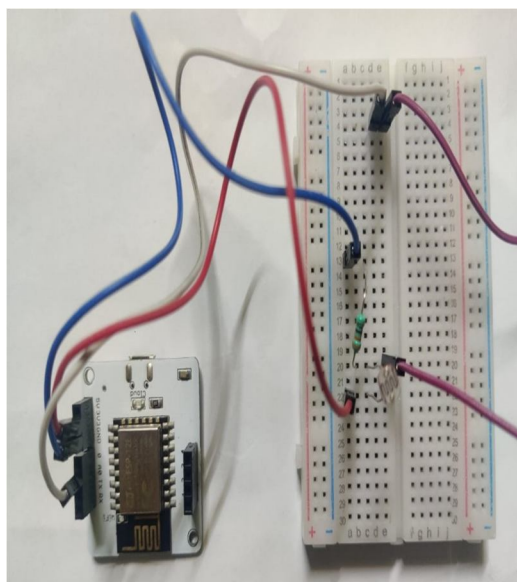


Fig-5: Hardware set-up

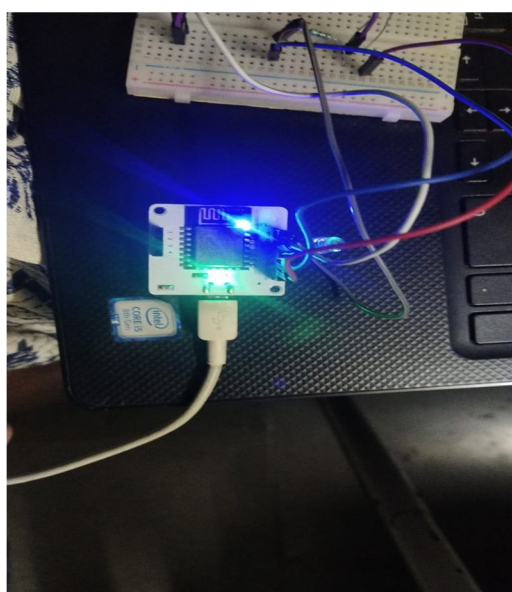


Fig-6: Final view of set-up after power supply

Upon connecting all the connections accordingly, and running the python code we will get the following output window:

```
This is the value 148
Not enough data to compute Z-score. Need -10 more data points
This is the value 140
Not enough data to compute Z-score. Need -9 more data points
This is the value 117
Not enough data to compute Z-score. Need -8 more data points
This is the value 157
Not enough data to compute Z-score. Need -7 more data points
This is the value 125
Not enough data to compute Z-score. Need -6 more data points
This is the value 126
Not enough data to compute Z-score. Need -5 more data points
This is the value 152
Not enough data to compute Z-score. Need -4 more data points
This is the value 124
Not enough data to compute Z-score. Need -3 more data points
This is the value 147
Not enough data to compute Z-score. Need -2 more data points
This is the value 136
Not enough data to compute Z-score. Need -1 more data points
This is the value 137
This is the value 141
```

Fig-7: output window for computation of Z-score

Here, take any of the frame size, after about 100 seconds (10 seconds delay with a frame size of 10), the system will start printing the light intensity values, as per the following image:

```
This is the value 158
This is the value 105
This is the value 106
This is the value 92
This is the value 96
This is the value 133
This is the value 135
This is the value 96
This is the value 89
This is the value 138
This is the value 127
This is the value 112
This is the value 100
This is the value 88
This is the value 104
This is the value 127
This is the value 129
This is the value 90
This is the value 125
This is the value 126
This is the value 92
This is the value 118
This is the value 137
This is the value 113
This is the value 92
This is the value 137
This is the value 122
This is the value 125
This is the value 127
```

Fig-8: output of various intensity values

You can now try moving a lit light source, like the torch on your mobile close to the LD. If you start from far away and move the torch close to the LDR slowly, the system will not send an alert. Similarly, if you move the light source away slowly no alert will be sent. But if you suddenly move the light source close to or away from the LDR, then the system will send an alert.

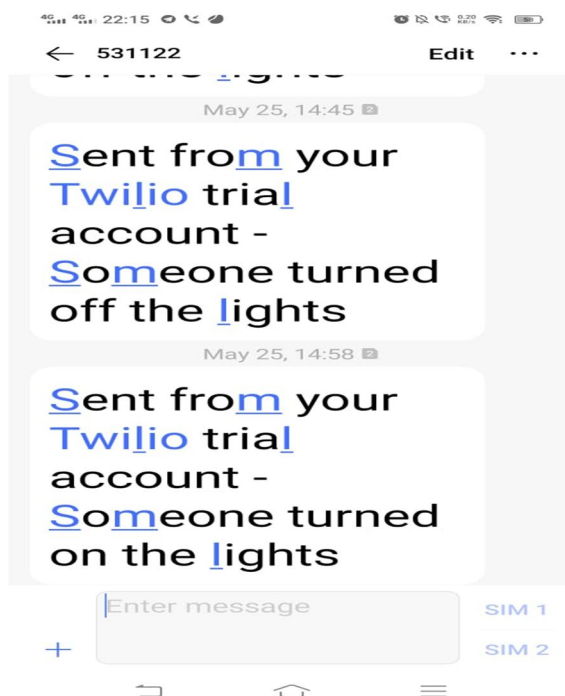


Fig-9: Alert SMS received to Mobile

VII. APPLICATIONS

The applications of this project are:

- A. Fire Detection System
- B. Pharmaceutical warehouses
- C. Plant Monitoring systems
- D. Room Light monitoring system

VIII. ANALYSIS

For the above process, we have given frame size as 10 which means for the first 10-time intervals from the above output it will add the intensity values to the array and does not compute any boundaries for the input values. It will just output the intensity of the light given at the sensor. Once the history data is enough i.e., length of history data array equals the frame size then the code starts predicting the upper and lower boundaries of light intensities that the next interval light intensity may exist. Once the light intensity value is received at the server the code checks whether the value is in the range of boundaries which is obtained from the computation using the Machine Learning Algorithm 'Z-SCORE ANALYSIS' and it is computed according to the values in the history data array. If the present light intensity value is higher than the predicted upper boundary value or lower than the predicted lower boundary value then a message that "Someone turned on the lights" or "Someone turned off the lights" is sent to the verified number in Twilio website from the number assigned to you by the Twilio. The newer value of light intensity is added to the history data array replacing the oldest data that came in. The new value is updated to the bolt cloud where all the data is used to plot a graph against time-stamp and light intensity and the type of graph depends upon the code written in the cloud dashboard. This graphical display of data is very much useful to process it further again to experiment and this graphical display of data is called as Data Visualization. Again, a new computation of data takes place with the updated history data array and new boundaries will be predicted for the next time sample. Again, the same process continues till the power supply lasts.

IX. FUTURE SCOPE

The Z-score model is an exceptionally functional apparatus that can be utilized to foresee the bankruptcy of organizations just as keeping up and observing of organizations being hazard overseen. Organization liquidations are an everyday event and as a general rule, credit granters miss out. The expectation models can successfully be utilized to penetrate that hole in the credit business. Besides, this instrument could be utilized by financial backers when thinking about putting resources into a privately owned business to find out the condition of the organization's monetary position. The Z score model may not be the simply model to gauge the monetary troubled firms and the scientist prescribes utilization of different models to decide the monetary bothered firms. This may even grow the quantity of upset firms in a given Securities Exchange. This examination energetically prescribes to the possible financial backers in organizations to utilize the disappointment forecast model as an appraisal device.

The outcomes could bring up specific issues about the condition of an organization and could eventually bring about a financial backer contributing or buying an organization that is beneficial and very much oversaw since declining Z-score esteems portrays a weak organization. The examination suggests that the disappointment expectation model should utilize the predominant Economic conditions like changes in the economy, markets and ventures in the economy to foresee a genuine image of the organization in the economy. Further examination ought to be embraced in the field Logit disappointment expectation models to figure the achievement or disappointment of the organization and give a correlation with the disappointment forecast model used to just its utilization and support their utilization by industry experts. Numerous different variables may have affected the presentation of firms, factors that can't be estimated or evaluated e.g., staff resolve, meeting room fights, and word related wellbeing and so on It would be intriguing if a comparative report was directed in concomitance with this to discover the discoveries. This would grow the extent of the writing on firm execution. Further investigation of Z score, and elective equations, is important to refine this conceivably helpful apparatus to foster an assortment of instruments valuable in foreseeing monetary trouble. This Z-score analysis will be useful in many detection and prediction parts and is delivered that should meet certain resilience limits set by the designing planner. This resilience gives lower and upper Z-score esteems for adequate parts. Factual Processing and Leak Detection.

Using cloud-based SMS alert system in future, we can change the priority of receiving important information as soon as possible in applications such as: Sending a quick alarm following an occasion, unsettling influence, climate, nonattendance of understudy or instructor, and so forth. Access to a SMS administration to send pragmatic data progressively ideal for transport benefits for instance (aggravation on a line, information on lines and plans, new schedules, work information, and so on).

X. CONCLUSION

To conclude by considering the future scope of this project, we can do the Z-Score analysis on any provided values to the BOLT Wi-Fi module. This module is useful because of security alerts in real time through SMS

By using this method, we can improve the accuracy efficiency of many emergency systems.

REFERENCES

- [1] Blue Eyes Intelligence Engineering of Sciences Publication by IJITEE (2019)
- [2] 16th International Symposium on District Heating and Cooling, DHC2018, (9–12) September 2018, Hamburg, Germany Ranking Abnormal Substations by Power.
- [3] Machine Learning Approach of Solar Power Technology Review and Evolution Analysis Department of Industrial Engineering and Engineering Management, National Tsing Hua University, Hsinchu 300, Taiwan (2019).
- [4] Internet of Things: Remote Patient Monitoring Using Web Services and Cloud Computing
- [5] Alareeni, B., & Branson, J. (2012). Predicting Listed Companies' Failure in Jordan Using Altman Models: A Case Study: <https://doi.org/10.5539/ijbm.v8n1p113>
- [6] AL khatib, K., & Al-Bzour, A. (2011). Predicting corporate bankruptcy of Jordanian listed companies: Using Altman and kida models. International Journal of Business. <https://doi.org/10.5539/ijbm.v6n3p208>
- [7] Al-Rawi, K., Kiani, R., & Ved, R. R. (2008). The Use of Altman Equation for Bankruptcy prediction in an Industrial Firm (Case Study)". International Business & Economics Research Journal. 7(7): 115-127.
- [8] Altman, E. I. (2000). Predicting Financial Distress of Companies. Revisiting The Z-Score and Zeta Models. Retrieved from <http://www.Default Risk.com>
- [9] Aziz, M., & Dar, H. (2006). Predicting corporate financial distress. Where Corporate Governance. The International Journal of Business in Society, 6(1), 18-33. <https://doi.org/10.1108/14720700610649436>
- [10] Germanton's, N., Vergos, K., & Christopoulos, A. (2009). Can Altman Z-Score Models Predict Business Failure In Greece?. C.Frangos (Ed.), 2nd International Conference quantitative and Qualitative Methodologies in the Economic and Administration Sciences (pp. 149-157). TEI of Athens.
- [11] Gunathilake, C. (2014). Financial Distress Prediction A Comparative Study of Solvency Test and Z-Score models with reference to Sri Lanka. The IUP Journal of Financial Risk Management, 11(3), 40-50.
- [12] Hayes, S. K., Hodge, K. A., & Hughes, L. W. (2010). A Study on the Efficiency of Altman's Z to Predict of Specialty Retail Firms Doing Business in Contemporary Times. Economics and Business Journal: Inquiries & Perspective, 3, 122-134
- [13] Ijaz, M. S., Hunjira, A. I., Hameed, Z., & Maqbool, A. (2013). Assessing the financial failure using the Z-score and current ratio: A case of sugar sector listed companies of Karachi Stock Exchange. World Applied Sciences Journal, 23(6), 863-870.



- [14] Kariuki, H. N. (2013). The effect of financial distress on financial performance of commercial banks in Kenya. Unpublished MBA Research Project, University of Nairobi.
- [15] Levratto, N. (2013). From failure to corporate bankruptcy: A review. *J Innov Entrep*, 2(1), 20.
- [16] Mahmoud, A. (2013). Signs of collapse of insurance in Jordan. From the internet source named <http://www.ammonnews.net/article/145231>
- [17] Mamo, A. Q. (2011). Applicability of Altman (1968) model in predicting financial distress of commercial banks in Kenya. Unpublished MBA Research Project, University of Nairobi.
- [18] Pathan, S. (2009). Strong boards, CEO power and bank risk-taking. *Journal of Banking and Finance* 29, 449-70. <https://doi.org/10.1016/j.jbankfin.2009.02.001>
- [19] Yousif, H. M, A., & Majed, M. E. (2002). Business failure in the Gaza strip bankers and business exerts viewpoint. *Journal of Islamic*, 10(1).
- [20] Smail, I.A.(2014).Financial cash flow determinants of company failure in the construction industry. Thesis published, University of Michigan.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)