



IJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 9 Issue: VI Month of publication: June 2021

DOI: <https://doi.org/10.22214/ijraset.2021.35405>

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Calculations for Go-Kart Vehicle

Viplav Barai¹, Sahil Gulhane², Sudhanshu Shende³, Shantanu Gulhane⁴, Prasad Patil⁵

^{1, 2, 3, 4, 5}Mechanical Department, RTMNU University Nagpur Maharashtra India

Abstract: Team barriers breakers Moto is to design and fabricate the sophisticated and simple kart design with factor of high fuel economy as well as with more suitable driver comfort without reconciliation the kart performance. This paper aims to increase the factor of safety of go kart chassis which is designed keeping in mind the rules imposed by INDKC 2019. This paper tends to design all the convenient features established in the go kart vehicle. There is involvement of many systems in manufacturing of go kart such as steering, braking, transmission, chassis etc. We have extensively designed and carried out the design analysis regarding separate all the systems involved in the kart's specifications. The design has been modeled in Catia V5 and Solidworks while the analysis was done in Ansys R1 and same rendering was done using Solidworks Keywords

I. INTRODUCTION

The go kart has been designed by team barrier breakers consisting of under graduated students from G.H.Raisoni College Of Engineering affiliated to R.T.M.N.U University, Nagpur.

We approach our design by considering all alternatives for a system and molding them in CAD software; Solidworks and Catia subjected to analysis using Ansys. The specimen was altered as a result of the analysis. retested and final designed was fixed. The primary objective of work is to design and develop a safer and functional vehicle based on a torsional free and rigid frame, well mounted power to learn and comprehend the finer points of vehicle design and in tension of working it easy to manufacture for consumer sale, while strictly following the rulebook.

The second objective is to make a kart with driver comfort to increase the performance maneuverability of the vehicle to achieve our goal the team is divided into core groups which are responsible for design and optimization of major sub systems which were later integrated into the final kart. The design has been approached in view of all possible substitutions for a system.

II. CHASSIS

A. Shear Force & Bending Moment Calculation of Chassis –

Taking moment at A

$$-0.590 \times 690 - 0.637 \times 320 - 0.889 \times 90 + R_b \times 1.05$$

$$R_b = 658.05\text{N}$$

Now,

$$\sum F_y = 0$$

$$R_a - 690 - 310 - 90 + R_b = 0$$

$$R_a = 441.95\text{N}$$

1) Shear Force Calculation

Shear Force Diagram (SFD):

$$\text{SF at A} = 441.95\text{N}$$

$$\text{SF at C} = -248.05\text{N}$$

$$\text{SF at D} = -568.05\text{N}$$

$$\text{SF at E} = -658.05\text{N}$$

$$\text{SF at B} = 0$$

2) Bending Moment Calculation

Calculating moment at each point,

$$M_B = 0$$

$$M_E = 658.05 \times 0.161$$

$$= 105.94\text{N-m}$$

$$M_D = -90 \times 0.252 + 658.05 \times 0.413$$

$$= 249.09\text{N-m}$$

$$MC = -320 \times 0.047 - 90 \times 0.299 + 658.05 \times 0.46$$

$$= 260.753\text{N-m}$$

$$MA = 0$$

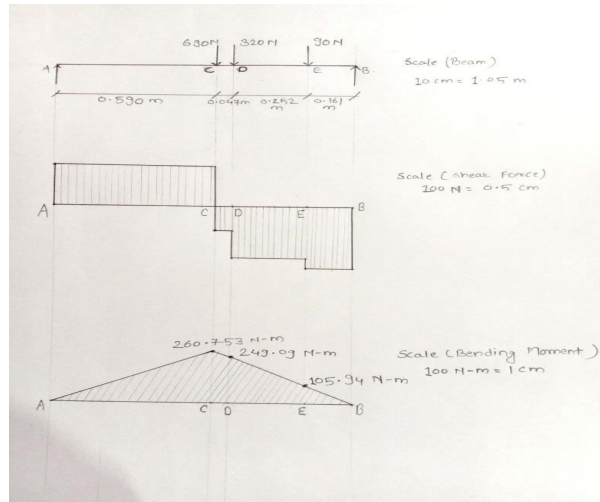


Fig. 1. SFD & BMD of Chassis

3) Chassis Diameter calculation

Taking Maximum moment

$$M = 260.753\text{N-m} = 260.753 \times 10^3 \text{ N-mm}$$

By Selecting Material: AISI 4130

Yield Strength = 460MPa

Factor of Safety (N_f) = 5

Tensile Stress (σ_t) = Y / N_f

$$(\sigma_t) = 460/5$$

$$= 92 \text{ N/mm}^2$$

Now, $\sigma_t = \sigma_b$

$$32 * M$$

$$\sigma_b =$$

$$\frac{\pi * D^3}{32}$$

$$92 = \frac{32 * 260.753 * 10^3}{\pi * D^3}$$

$$D = 30.67\text{mm} = 32 \text{ mm}$$

III. STEERING SYSTEM

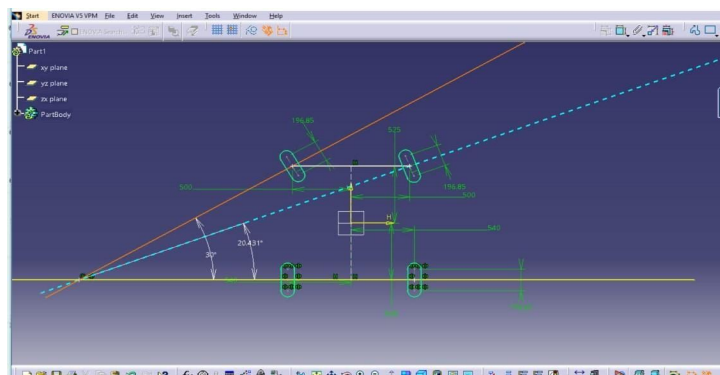


Fig. 2. Steering Geometry

Where,

α = Steering angle of inner front wheel = 30°

β = Steering angle of outer front wheel = 20.431°

a = Track width

b = Wheel base

c = Distance between pivot points

Our dimensions are in inches

a = Front wheel track width = 39.37"

b = Wheel base = 41.34"

c = distance between pivot points = 42.52"

a) *Radius of inner front wheel,*

$$\begin{aligned} R_{IFW} &= \frac{b}{\sin \theta} - \left(\frac{a - c}{2} \right) \\ &= \frac{41.34}{\sin(30)} - \left(\frac{39.37 - 42.52}{2} \right) \\ &= 84.255'' \end{aligned}$$

b) *Radius of Outer Front Wheel,*

$$\begin{aligned} R_{OFW} &= \frac{b}{\sin \theta} + \left(\frac{a - c}{2} \right) \\ &= \frac{41.34}{\sin(20.431)} + \left(\frac{39.37 - 42.52}{2} \right) \\ &= 116.850'' \end{aligned}$$

c) *Radius of inner rear wheel,*

$$\begin{aligned} R_{IRW} &= \frac{b}{\tan \theta} - \left(\frac{a - c}{2} \right) \\ &= \frac{41.34}{\tan(30)} - \left(\frac{39.37 - 42.52}{2} \right) \\ &= 75.677'' \end{aligned}$$

d) *Radius of outer rear wheel,*

$$R_{ORW} = \frac{b}{\tan \theta} + \left(\frac{a - c}{2} \right)$$

$$= \frac{41.34}{\tan(20.431)} + \left(\frac{39.37 - 42.52}{2} \right)$$

$$= 106.90''$$

Radius with C.G

$$RCG = \tan \theta = (L / (R - t/2))$$

$$= \tan(30) = (41.33 / (R - 39.37/2))$$

$$= 91.27''$$

e) Actual turning Radius,

$$T = \frac{a}{2} + b * \csc\left(\frac{RIFW}{2} + \frac{ROFW}{2}\right)$$

$$= \frac{39.37}{2} + 41.37 * \csc\left(\frac{30 + 20.431}{2}\right)$$

$$= 116.83 \text{ inch}$$

f) Ackerman angle,

$$= \tan^{-1}(\tan \phi - a)$$

$$= \tan^{-1}(\tan(20.431) - 100) = 29.99^\circ$$

g) Ackerman Percentage,

$$= \frac{\theta}{\text{Ackerman angle}} * 100$$

$$= \frac{30}{29.99} * 100$$

$$= 100\%$$

h) Steering Effort,

Maximum load on front tyre on full brake = 1671.86N

Maximum load on each tyre = 835.93N

Material of Knuckle = AISI-1040

Scrub radius (z) = 110mm

Steering effort at static condition

Normal reaction of front wheel = 666.8 N

Normal reaction for each wheel = 333.4 N



$$\begin{aligned}
 SE_s &= \square * \text{normal reaction} * \text{scrub radius} \\
 &= 0.7 * 333.4 * 110 * 10^{-3} \\
 &= 25.67 \text{ N-m}
 \end{aligned}$$

Steering effort at static condition = 25.67 N-m

Table -1 Steering Result

Parameters	Values
Radius of inner front wheel	84.25"
Radius of outer front wheel	116.85"
Radius of inner rear wheel	75.67"
Radius of outer rear wheel	106.90"
Actual turning radius	116.83"
Ackerman Angel	29.99 ⁰
Ackerman Percentage	100%
Steering effort at static load	25.67 N-m
Caster Angle	5 ⁰
Camber Angle	0 ⁰
FOS of steering column	4
FOS of Knuckle	8.8
Wheel Base	41.33"
Track Width	39.37"

IV. TRANSMISSION SYSTEM

A. Specification of Engine

Engine: Bajaj Discover 125 ST

Displacement: 124.6cc

Maximum Power: 12.8 HP @ 9000rpm

Maximum Torque: 11 N-m @ 7000rpm

No. of cylinders: 1

No. of Gears: 5

B. Power Transmission

1) Sprocket Calculations

Largest Sprocket (T_g): 30 no. of teeth

Smallest Sprocket (T_p): 14 no. of teeth

T_g = Numbers of teeth on Gear sprocket.

T_p = Numbers of teeth on Pinion sprocket.

$$\begin{aligned}
 \text{Gear Ratio} &= \frac{T_g}{T_p} \\
 &= \frac{30}{14} \\
 &= 2.14
 \end{aligned}$$

Chain Pitch: 12.7 mm

$$\begin{aligned} \text{Roller Diameter} &= \frac{5 * p}{8} \\ &= \frac{5 * 12.7}{8} \\ &= 7.9375 \text{ mm} \end{aligned}$$

$$\begin{aligned} \text{Tooth Width (t1)} &= 0.91 * b \\ &= 0.91 * 7.9375 \\ &= 7.22 \text{ mm} \end{aligned}$$

$$\begin{aligned} \text{Max. Height of pin link plates (h1)} &= 0.95 * p \\ &= 0.95 * 12.7 \\ &= 12.065 \text{ mm} \end{aligned}$$

a. Pitch diameter of Sprockets

$$\text{Pitch (P)} = 12.7 \text{ mm}$$

DP = Pitch diameter of pinion

$$\begin{aligned} &= \frac{P}{\sin\left(\frac{14}{2}\right)} \\ &= \frac{12.7}{\sin\left(\frac{14}{2}\right)} \\ &= 57 \text{ mm} \end{aligned}$$

Dg = Pitch diameter sprocket gear

$$\begin{aligned} &= \frac{P}{\sin\left(\frac{14}{2}\right)} \\ &= \frac{12.7}{\sin\left(\frac{14}{2}\right)} \\ &= 122 \text{ mm} \end{aligned}$$

b. D_{po} = Outside diameter of sprocket pinion

$$\begin{aligned} &= DP + 0.8 * d \\ &= 57 + 0.8 * 7.9375 \\ &= 63.35 \text{ mm} \end{aligned}$$

c. D_r = Shroud diameter of sprocket pinion

$$\begin{aligned} &= p * \cot\left(\frac{14}{2}\right) - 1.3 * h \\ &= 12.7 * \cot\left(\frac{14}{2}\right) - 1.3 * 12.065 \\ &= 40 \text{ mm} \end{aligned}$$

d. D_{go} = Diameter of gear sprocket

$$= D_g + 0.8 * d$$

$$= 122 + 0.8 * 7.9375$$

$$= 128.35 \text{ mm}$$

2) Chain Calculations

C = Centre Distance = 30 cm

a. Length of Chain = L

$$= \frac{T_p + T_g}{2} + \left(\frac{T_g - T_p}{2 * n} \right)^2 * \frac{P}{C} + 2 * C$$

$$= \frac{14 + 30}{2} + \left(\frac{30 - 14}{2 * n} \right)^2 * \frac{1.27}{30} + 2 * \frac{30}{1.27}$$

$$= 69.51 \text{ cm} = 70 \text{ cm}$$

b. Chain Sag

Chain length elongation = 2% of chain length

$$\text{Chain length elongation} = 0.02 * 700$$

$$= 14 \text{ mm}$$

c. Pitch line velocity

NP = R.P.M. of pinion = 2300 rpm

$$\text{Pitch line velocity} = V = \frac{n * D_p * N_p}{60}$$

$$= \frac{n * 0.057 * 2300}{60}$$

$$= 6.86 \text{ m/sec} = 412.6 \text{ m/min}$$

d. Driving force

$$Df = \text{H.P.} * \frac{4500}{V}$$

$$= 12.8 * \frac{4500}{412.6}$$

$$= 140 \text{ kg}$$

e. Total Load on driving side of chain

$$W_T = Df + P_c + P_f$$

P_c = Chain tension due to centrifugal load

$$= \frac{wv}{g} * V^2$$

Where, w = weight per meter chain of length = 1.75 kg

$$= \frac{1.75}{9.81} * (6.86)^2$$

$$= 8.39 \text{ kg}$$

$$P_f = k * w * C$$

$$= 3.15 \text{ kg}$$

$$W_T = 140 + 8.39 + 3.15$$

$$= 151.54 \text{ kg}$$

f. Breaking Strength

F_b = Breaking strength

$$= 1060 \cdot (p)^2$$

$$= 1060 \cdot (1.27)^2$$

$$= 1709.67 \text{ kg}$$

g. Factor of safety

$$= \frac{F_b}{W_T}$$

$$= \frac{1709.67}{151.54}$$

$$= 11.28 = 11 \text{ (say)}$$

3) Axle Calculations

Material: AISI 1040

Bending moment equation,

$$\frac{M}{I} = \frac{\sigma_b}{y}$$

Maximum Bending Moment (M) = $2.37 \cdot 10^6$ N-mm

Ratio between Inside and outside diameter (k) = 0.75

Bending Stress σ_b = 620 MPa

$$\frac{M}{I} = \frac{\sigma_b}{y}$$

We have,

$$d_o = 38.48 \text{ mm} = 40 \text{ mm}$$

$$d_i = 0.75 \cdot 40 = 30 \text{ mm}$$

4) Maximum Speed at the wheels @ 7000 rpm of engine

Table -2

Primary gear reduction	3.08
1st gear reduction	2.38
2nd gear reduction	1.71
3rd gear reduction	1.33
4th gear reduction	1.08
5th gear reduction	0.91
Max engine rpm	9000

a) 2.83

$$\begin{aligned} & \frac{3.00 \times 30}{14 \times 2.83} = 18.678 \\ & \frac{9000}{18.678 \times 60} \\ & = 8.031 \\ & \frac{2 \times 71 \times 5.5 \times 25.4 \times 0.95 \times 8.031}{1000} \\ & = 6.696 \\ & \frac{6.696 \times 18}{5} \\ & = 24.10 \text{ km/hr} \end{aligned}$$

b) 1.71

$$\begin{aligned} & \frac{3.08 \times 30}{14 \times 1.71} = 11.286 \\ & \frac{9000}{11.286 \times 60} \\ & = 13.29 \\ & \frac{2 \times 71 \times 5.5 \times 25.4 \times 0.95 \times 13.29}{1000} \\ & = 11.08 \\ & \frac{11.08 \times 18}{5} \\ & = 39.89 \text{ km/hr} \end{aligned}$$

c) 1.33

$$\begin{aligned} & \frac{3.08 \times 30}{14 \times 1.33} = 8.778 \\ & \frac{9000}{8.778 \times 60} \\ & = 17.000 \\ & \frac{2 \times 71 \times 5.5 \times 25.4 \times 0.95 \times 17.000}{1000} \\ & = 14.24 \\ & \frac{14.24 \times 18}{5} \end{aligned}$$

= 51.29 km/hr

d) 1.08

$$\begin{aligned} & \frac{3.08 \times 30}{14 \times 1.08} = 7.128 \\ & \frac{9000}{7.128 \times 60} \end{aligned}$$

$$= 21.043$$

$$= \frac{2 * \pi * 5.5 * 25.4 * 0.95 * 211.043}{1000}$$

$$= 17.54$$

$$= \frac{17.54 * 10}{5}$$

$$= 63.16 \text{ km/hr}$$

e) 0.91

$$= \frac{9.08 * 80}{14 * 0.91}$$

$$= 6.006$$

$$= \frac{9000}{6.006 * 60}$$

$$= 24.975$$

$$= \frac{2 * \pi * 5.5 * 25.4 * 0.95 * 24.975}{1000}$$

$$= 20.82$$

$$= \frac{20.82 * 18}{5}$$

$$= 74.97 \text{ km/hr}$$

5) *Air Resistance*

$$= \frac{1}{2} * \rho * A * V^2 * C_d$$

$$= 130.04 \text{ N}$$

6) *Rolling Resistance*

= coefficient of friction*mass*gravity

$$= 0.6 * 170 * 9.81$$

$$= 1000.62 \text{ N}$$

7) *Total Resistance*

= Air resistance + Rolling Resistance

$$= 130.04 + 1000.62$$

$$= 1131.26 \text{ N}$$

C. Final Result

Table -3 Transmission Result

Parameters	Values
Pitch diameter of sprocket pinion	57 mm
Pitch diameter of sprocket gear	122 mm
Outside diameter of sprocket pinion	63.35 mm
Shroud diameter of sprocket pinion	40 mm
Diameter of gear sprocket	128 mm
Length of chain	70 cm
Chain sag	14 mm
Pitch line velocity	6.86 m/s
Driving Force	140 kg
Total load on driving side of chain	151.54 kg
Breaking Strength	1709.67 kg
Factor of safety	11
Outer diameter of axel	40 mm
Inner diameter of axel	30 mm
Air resistance	130.04 N
Rolling resistance	1000.62 N
Total Resistance	1131.26

V. BRAKE SYSTEM

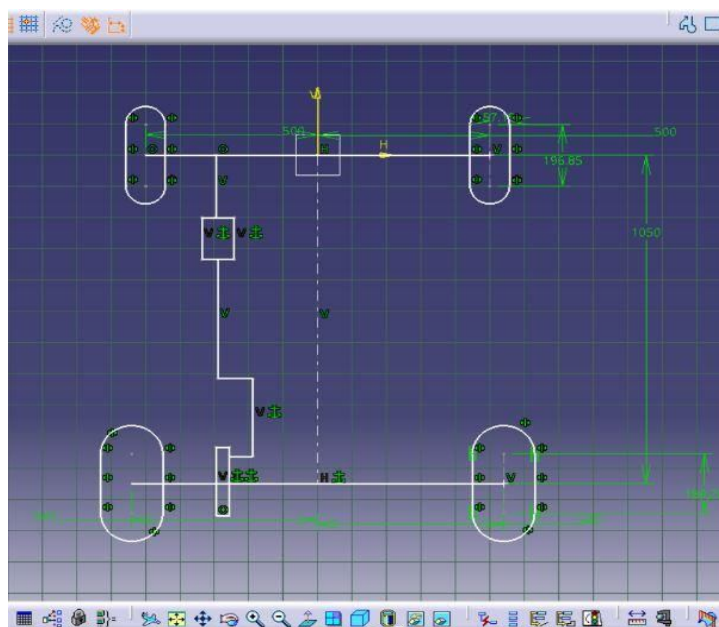


Fig. 2. Line diagram of Braking System

1) *Gross weight (W)*

$$= g * \text{weight of vehicle}$$

$$= 9.81 * 170$$

$$= 1667.7 \text{ N}$$

2) *Area of Calliper & Master Cylinder*

$$\text{Diameter of Calliper piston (Dc)} = 32 \text{ mm}$$

$$\text{Diameter of master cylinder (Dm)} = 11 \text{ mm}$$

$$\text{Area of Calliper} = \frac{\pi}{4} (D_c)^2$$

$$= \frac{\pi}{4} (32)^2$$

$$= 804.24 \text{ mm}^2$$

$$\text{Area of Master Cylinder} = \frac{\pi}{4} (D_m)^2$$

$$= \frac{\pi}{4} (11)^2$$

$$= 95.03 \text{ mm}^2$$

3) *Pressure in the system*

$$\text{Pedal force} = 250 \text{ N}$$

$$\text{Pedal Ratio} = 4:1$$

$$\text{Pressure in the system} = \frac{\text{net force on master cylinder}}{\text{area of master cylinder}}$$

$$= \frac{4 * 250}{95.03}$$

$$= 10.52 \text{ N/mm}^2$$

4) *Clamping Force*

$$= \text{Brake line pressure} * \text{Area of piston}$$

$$= 10.52 * 804.24 * 2$$

$$= 16921.20 \text{ N}$$

5) *Rotating Force*

$$= \text{Clamping force} * \text{Coefficient of friction}$$

$$= 16921.20 * 0.4$$

$$= 6768.5 \text{ N}$$

6) *Braking torque*

$$\text{Braking torque produce} = \text{Rotating Force} * \text{effective disc radius}$$

$$= 6768.5 * 95 * 10^{-3}$$

$$= 643.00596 \text{ N-m}$$

$$= 643005.96 \text{ N-mm}$$

7) *Force at Tyre*

Effective Radius Of tyre = 139.7 mm

$$\text{Force at Tyre} = \frac{\text{Braking Torque}}{\text{Effective Radius}}$$

$$= \frac{643005.96}{139.7}$$

$$= 4602.76 \text{ N}$$

8) *Deceleration (a)*

$$= \frac{- \text{Force at tyres}}{\text{Mass}}$$

$$= \frac{-4602.76}{170}$$

$$= -27 \text{ m/s}^2$$

9) *Braking Force = m*a*

$$= 170 * 27$$

$$= 4590 \text{ N}$$

10) *Stopping Distance*

$$v^2 - u^2 = 2as$$

$$(0^2 - 16.16^2) = 2 * (-27) * s$$

$$s = 5.14$$

11) *Stopping Time*

$$t = \frac{16.16}{27}$$

$$t = 0.61 \text{ sec}$$

12) *Height of center of gravity*

l = wheel base = 105 cm = 1050 mm

Front Track Width = 100 cm = 1000 mm

Rear Track Width = 108 cm = 1080 mm

13) *Horizontal location of C.G.*

Assuming weight distribution of vehicle in the ratio 40:60

WF = static load on front wheels

$$= 0.40 * 1667.7$$

$$= 666.8 \text{ N}$$

$$= 68 \text{ kg}$$

W_R = Static load on rear wheels

$$= 0.60 * 1667.7$$

$$= 1000.2 \text{ N}$$

$$= 102 \text{ kg}$$

Now,

$$x = W_R * \frac{I}{W}$$

$$x = 102 * \frac{1050}{170} = 630 \text{ mm}$$

$$y = W_F * \frac{I}{W}$$

$$y = 68 * \frac{1050}{170} = 420 \text{ mm}$$

14) Vertical Height of C.G.

W_f = Weight when the

$W_f = 55 \text{ kg}$

W_k = Weight of the kart

$W_k = 100 \text{ kg}$

We have,

$h = 0.420 \text{ m}$

Where,

RLF is loaded radius of front = 0.127 m

RLR is loaded radius of rear = 0.14 m

Now,

$$l_1 = l * \cos \theta$$

and taking the moment about O.

$$W_f * l_1 = W * b_1$$

from which

$$b_1 = \frac{W_f}{W} * l * \cos \theta$$

Also

$$b_1 = \frac{b_1}{(x+c)} * l * \cos \theta$$

From which

$$b_1 = \left(\frac{W_f * l}{W} \right) - b$$

Now,

$$\tan \theta = \frac{h_1}{c}$$

$$h_1 = \frac{(W_f * l) - (W_k * y)}{W_k * \tan \theta}$$

$$= \frac{(550 * 1.05) - (1000 * 0.420)}{1000 * \tan 30}$$

$$= 0.2727 \text{ m}$$

$$R_{LCG} = R_{LF} * \frac{y}{I} + R_{RF} * \frac{x}{I}$$

$$= 0.127 * \frac{0.420}{1.05} + 0.14 * \frac{0.630}{1.05}$$

$$= 0.1348 \text{ m}$$

$$\square h = 0.2727 + 0.1348$$

$$h = 0.4075 \text{ m or } 16''$$

A. Final Result

Table -4 Breaking Result

Parameter	Value
Gross Weight	1667.7 N
Area of Calliper	804.24 mm ²
Area of Master Cylinder	95.03 mm ²
Pressure in the System	95.03 mm ²
Clamping Force	16921.20 N
Rotating Force	6768.5 N
Braking Torque	643.00596 N-mm
Force on tyre	4602.76 N
Deceleration	-27 m/s ²
Braking Force	4590 N
Stopping Distance	5.14 m
Stopping time	0.61 sec
Height of C.G.	0.4075 m
Static load on front axel	666.8 N
Static load on rear axel	1000.2 N

REFERENCES

- [1] Automotive Engineering Fundamentals- Jeffrey K. Ball & Richard Stone
- [2] A textbook of machine design- R.S.Khurmi and J.K.Gupta
- [3] Wikipedia.
- [4] Google Search engine.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)