



IJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 9 Issue: VI Month of publication: June 2021

DOI: <https://doi.org/10.22214/ijraset.2021.35676>

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

GSM based Smart Irrigation System

Akhila Pogula¹, Navya Bandari², Matla Yuktha Kiran³, Mrs. S. Latha⁴

^{1, 2, 3}UG student B. Tech IV year, ⁴Associate Professor, Department of Electronics and Communication Engineering, Sreenidhi Institute of Science and Technology, Hyderabad, Telangana-501301 India

Abstract: Irrigation is defined as artificial software of water to land or soil. Irrigation manner may be used for the cultivation of agricultural plants at some point of the span of insufficient rainfall and for keeping landscapes. an automatic irrigation machine does the operation of a machine without requiring manual involvement of folks. each irrigation gadget such as drip, sprinkler and surface get automated with the assist of digital home equipment and detectors such as computer, timers, sensors and different mechanical gadgets. the automatic irrigation gadget on sensing soil moisture assignment is supposed for the development of an irrigation machine that switches submersible pumps on or off with the aid of the use of relays to perform this action on sensing the moisture content material of the soil. the main benefit of the usage of this irrigation machine is to reduce human interference and ensure right irrigation. The targets of this paper have been to control the water motor mechanically with the help of soil moisture sensor. in the end ship the facts (operation of the motor) of the farm field to the cell message to the user. an automatic irrigation gadget for efficient water control has been proposed.

Keywords: automatic, timers, sensors.

I. INTRODUCTION

In gift days, in the field of agriculture farmers are facing predominant problems in watering their plants. It's due to the fact they don't have right idea approximately the supply of the power. even supposing it's far available, they need to pump water and wait until the sphere is well watered, which compels them to forestall doing other sports – which can be additionally important for them, and as a result they loss their valuable time and efforts. but there may be a solution – an automatic plant irrigation machine no longer handiest allows farmers however also others for watering their gardens as well.

This computerized irrigation system senses the moisture content material of the soil and automatically switches the pump when the electricity is on. A right usage of irrigation gadget is very essential due to the fact the main reason is the dearth of land reserved water because of loss of rain, unplanned use of water as a end result large quantities of water goes waste. for this reason, we use this automated plant watering device, and this system is very beneficial in all climatic condition.

when the soil becomes dry, it produces huge voltage drop due to excessive resistance, and that is sensed by using the Soil moisture sensor. This relay is attached to the input of an electrical fee and the output of the electric fee is given to the vegetation via the pipe.

II. LITERATURE SURVEY

Automation of irrigation gadget refers back to the operation of the gadget with no or minimal manual interventions. Irrigation automation is justified wherein a massive irrigated vicinity is divided into Small segments called irrigation blocks and segments are irrigated in series to match the release available from the water supply. in this regard, the works that we've got surveyed describe the one of a kind varieties of computerized irrigation techniques, how they actually have served the purpose and the number one distinction between our project and those literatures that we have contemplated. On this element, the present works "implemented engineering in agriculture"[1], "facts acquisition gadget and irrigation controller"[12] and "Automation in Micro-Irrigation" [13], employs subsurface drip irrigation the usage of drip tapes and are time based totally structures in which irrigation time clock controllers, or timers, are an fundamental a part of an automatic irrigation gadget. A timer is an essential device to use water within the important amount on the right time. Timers can lead to underneath or over-irrigation if they're now not efficaciously programmed or the water quantity is calculated incorrectly. Time of operation is calculated according to extent of water required and the common flow rate of water a timer starts off evolved and prevents the irrigation technique. It automatically schedules irrigation at random events via using timers in which in the automation for the gadget and shows had been not carried out.

The papers titled " remarks manage for surface Irrigation management "[2] and "manipulate and Automation in Citrus Micro-irrigation structures" [16], employs open loop structures in which the operator makes the selection on the amount of water to be carried out and the timing of the irrigation occasion. The controller is programmed correspondingly and the water is applied consistent with the preferred schedule. Open loop control systems use either the irrigation duration or a certain carried out volume for manipulate functions. Open loop controllers generally include a clock that is used to start irrigation.

Termination of the irrigation can be based totally on a pre-set time or may be based totally on a precise extent of water passing thru a float meter. In an open loop machine, the operator makes the choice on the quantity of water on the way to be applied and while the irrigation event will occur. This facts is programmed into the controller and the water is carried out according to the desired schedule. Open loop manage systems use both the irrigation duration or a distinctive applied extent for manipulate purposes. The drawback of open loop systems is their lack of ability to respond robotically to converting conditions inside the surroundings. similarly, they may also require frequent resetting to achieve high ranges of irrigation efficiency.

The papers titled, " Drip irrigation scheduling of tomato"[4] and "design of a Micro-Irrigation gadget primarily based on the manage volume approach" [15], employ extent-based systems. The pre-set quantity of water may be applied inside the field segments via the use of automated volume-controlled metering valves. It's depicted that the volume manage structures are extra positive than time manipulate systems. the amount of water these systems supply is constant irrespective of non-stop energy availability however still time managed systems are greater popular as they're less expensive. here quantity meters are connected, which emits a pulse after handing over a selected amount of water and the controller measures these pulses to hold a test on the deliver. The papers titled, "Irrigation and water use efficiency"[10], "Presentation of an Irrigation control model for a Multi-cropping and sample putting"[14] and "productivity of irrigation technologies" [17], gift a spreadsheet version, that not handiest provides water budgeting and forecasting for 303 | P a g e multi-plot fields, but also optimizes the acreage of each plot ensuring that everyone the vegetation may be irrigated each day to satisfy contemporary needs making use of all of the to be had water and time throughout an extended simulation and the prioritization of plots to be irrigated primarily based on uncooked deficit and net sales.

III. EXISTING METHODOLOGY

A. Time Based Automatic System Of Drip And Sprinkler Irrigation

Land in coastal regions is significantly suffering from weather and weather, like at Banjarsari, Nusawungu, Cilacap Regency, Central Java, Indonesia. Uncertain and speedy extrade of weather regularly arise there. The depth of rainfall is round 47. three mm/day and the depth of solar is round 109.960 lux[3].In sure months (called transition period) the air temperature and soil temperature are very excessive (respectively 39o C and 44o C) and coffee air humidity 36%[3].In addition, the bodily houses of sand which have very excessive percolation of 209 mm/day and coffee water protecting capability require farmers withinside the coastal region to preserve water availability at the land thru very extensive watering of plant life, i.e. at the least three instances an afternoon in order that plant life can develop well.


In addition, farmers additionally want to regularly screen and do extra extensive watering than typical the circumstance of soil moisture. It reasons watering dominates the value of horticulture cultivation in coastal sand. The traditional technique of giving water the use of a watering can could be very use

less and inefficient for a big region of land. It significantly limits the capacity of a farmer to control a much wider region of land. While the usage of water pumps directly (with out reservoirs) makes the pump, engine flip on-off regularly which can also additionally reason excessive fees and harm to the pump. The quantity and stress of water on the way to accept is likewise hard to measure, which if too big can reason harm to the plant. So that the water reservoir withinside the reservoir is wanted to make extra green use of water.


The software of water deliver automation era is predicted to boom farmer's enterprise capability in addition to water usage efficiency. The lack of understanding on irrigation technology collectively with the houses of water dynamics of the sandy soils which has low water protecting capability, makes optimization of irrigation scheduling standards emerge as crucial trouble for enhance manufacturing efficiency (i.e. time set-factors for triggering irrigation and superior period of irrigation pulses). Based on this, the primary goals of the paintings had been to layout time-primarily based totally irrigation scheduling standards adjusted for sandy soils, and to evaluate the automated irrigation device performance. The automated watering device primarily based totally at the presenting time table the use of Arduino minimal device has been correctly constructed from preferred time of scheduling irrigation effectively.

The device additionally controls the water degree withinside the reservoir and measures the circumstance of soil moisture. The check effects display the device can paintings according with this system flowchart designed. This device presents flexibility and accuracy in appreciate of time set for the operation of a sprinkler and drip irrigation. In gift paintings the automated sprinkler and drip irrigations drove with solenoid AC pumps and DC pumps.

The device is capable of deliver water constantly for the plant life on specific time (on 07:00, 11:00, and 17:00) for 15 mins for onions and cabbage flower cultivation on costal region.

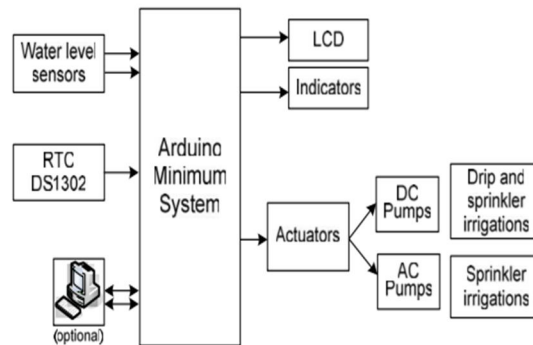

IV. PROPOSED METHODOLOGY

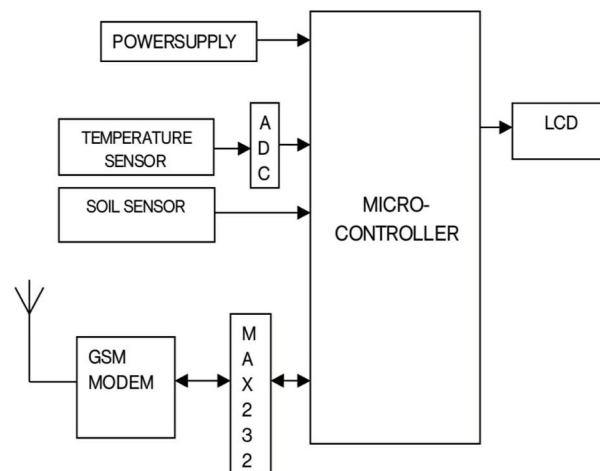

A. Arduino UNO

Arduino is an open-supply pc hardware and software program tool. It additionally designs and manufactures Act primarily based totally kits for constructing virtual gadgets and interactive items that could feel and manage items with many gadgets.

B. Relay

Relay board module is used for controlling better cutting-edge masses from microcontroller improvement board, PC parallel or Arduino uno. This board has one onboard relay that can transfer up to 7 amps. Relay's terminals (C, NC, NO) are reachable via screw terminals which makes wiring up the board very easy. The relay is accurately pushed through transistor BC547 consequently enter device, inclusive of Arduino, is covered from relay circuit. There is loose wheeling diode in an effort to similarly guard microcontroller from relay kick back.

C. GSM Module

Gsm module is a specialised kind of module which accepts a sim card, and operates over a subscription to a cell operator, much like a cell telecall smartphone. Gsm module can carry out the subsequent operations:

Receive ship or delete SMS messages in a sim.

Read, add, seek telecall smartphone ee-e book entries of the sim.

Make, acquire or reject a voice call.

D. Soil Moisture Sensor

Soil moisture sensors are used for measuring the water content material of the soil. The soil moisture sensor makes use of capacitance to degree dielectric permittivity of the encompassing medium in soil, dielectric permittivity is a characteristic of the water content material. The sensor creates a voltage proportional to the dielectric permittivity, and consequently the water content material of soil. The sensor averages the water content material over the complete period of the sensor. There is a centimetre sector of have an effect on with appreciate to the flat floor of the sensor, however it has very little sensitivity at the intense edges. The soil moisture sensor is used to degree the lack of the moisture through the years because of evaporation and plant uptake, examine premier soil moisture contents for diverse species of plants, screen the soil moisture content material to manipulate irrigation.

The module desires a AT instructions, for interacting with processor or controller, that are communicated via serial communication. These instructions are despatched through the controller/processor. The module sends again end result after it gets a command. Different AT instructions supported through the module may be despatched through processor/controller/pc to have interaction with GSM mobile network.

The major motive for deciding on this tool Arduino uno is that controller board primarily based totally at the ATmega328 includes 14 virtual input/output pins (of which 6 may be used as PWM outputs), 6 analog inputs, a sixteen MHz crystal oscillator, a USB connection, a strength jack, an ICSP header, and a reset button and Flash Memory 32 KB of which 0. five KB utilized by boot loader SRAM 2 KB EEPROM 1 KB Clock Speed sixteen MHz

This prototype video display units the quantity of soil moisture. A predefined variety of soil moisture is set, and may be various with soil kind or crop kind. In case the moisture of the soil deviates from the required variety, the watering machine is growing to become on/off. Whenever machine switched on/off, a message is despatched to the person thru GSM module updating the reputation of water pump and soil moisture, it'll prompt the irrigation machine, pumping water for the plants.

The block diagram of clever irrigation machine is represented in Fig. It includes a Arduino uno (ATmega328) that is the mind of the machine. The soil moisture sensor is attached to the enter pin of the controller. The water pump, gsm module and the relay are coupled with the output pins. Sensors are positioned withinside the soil, those sensors make use of probes which experience the moisture degree withinside the soil. Moisture degree readings are despatched to the Arduino controller. Soil sensor is analog, the analog alerts are transformed into virtual shape from an in-built ADC found in Arduino controller. Arduino now signals the motor to deliver the specified quantity of water to the soil. The motor is programmed to rotate, the rotating platform is connected at the motor to offer a base second of pipe. If the soil is dry the moisture sensor values might be high, so the pump is grew to become on the usage of a relay and switched off whilst the values reaches threshold.

This machine integrates a GSM module with Arduino in which the moisture fee measured through the sensor and standing of the pump (ON/OFF) is collected. The farmer might be intimated approximately the cutting-edge discipline situation and this fact is displayed on an internet web page at the side of the manipulate buttons to show on or flip off the water pump remotely. So that the farmer can get admission to the information about the situation of the sector anywhere, anytime.

V. FUTURE SCOPE

The smart irrigation system implemented is feasible and cost effective for optimizing water resources for agricultural production. This irrigation system allows cultivation in places with water scarcity thereby improving sustainability. The smart irrigation system developed proves that the use of water can be diminished for a given amount of fresh biomass production. The use of solar power in this irrigation system is pertinent and significantly important for organic crops and other agricultural products that are geographically isolated, where the investment in electric power supply would be expensive. Real time system for irrigation is based on GSM and zigbee module. The system is incredibly versatile and economical.

VI. CONCLUSIONS

Irrigation has been the spine of human civilization considering that guy has began out agriculture. As the technology evolved, guy advanced many techniques of irrigation to deliver water to the land. In the existing situation on conservation of water is of excessive importance. Present paintings is tries to store the herbal assets to be had for human kind. By constantly tracking the reputation of the soil, we will manage the waft of water and thereby lessen the wastage. By understanding the reputation of moisture and temperature via GSM with using moisture and temperature sensors, water waft may be managed with the aid of using simply sending a message from our mobile. Conservation of water and labor: Since the structures are automatic, they do now no longer require non-stop tracking with the aid of using labor.



REFERENCES

- [1] S.R. Nandurkar, V. R. Thool, R.C. Thool, Design and Development of Precision Agriculture System Using Wireless Sensor Network, IEEE International Conference on Automation, Control, Energy and systems (ACES), 2014
- [2] JoaquinGutierrez, Juan Fransico Villa-medina , AlejandraNieto- Garibay, and Miguel Angel Porta-Gandara, Automated Irrigation System Using a Wireless Sensor Network and GPRS module , IEEE TRANSACTIONS ON INSTRUMENTATION AND MEASUREMENT ,0018-9456,2013 [3] Y.Kim , R Evans and W. Iversen , Remote Sensing And Control Of An Irrigation System Using a Distributed Wireless Sensor Network, IEEE Transactions on instrumentation and measurement , pp.1379-1387,2008 [4] N.Kaewmard and S.Saiyod, Sensor Data Collection and Irrigation Control on Vegetable Crop Using Smart phone and Wireless Sensor Networks for Smart farm, ICWiSe 2014-2014 IEEE Conf.Wire.Sensors Subang, Malaysia,Oct 26-28,pp.106-112,2014 [5] Q.Wang, A.Terzis and A.Szalay, A Novel Soil Measuring Wireless Sensor Network, IEEE Transactions on Instrumentation and Measurement, pp.412-415,2010
- [3] Karan Kansara , Vishal Zaveri , Shreyans Shah , Sandip Delwadkar , Kaushal Jani Sensor based Automated Irrigation System with IOT: A Technical Review Karan Kansara et al, / (IJCSIT) International Journal of Computer Science and Information Technologies.
- [4] S.G.Manoj Guru 1, P.Naveen2 , R.Vinodh Raja3 , V.Srirenga Nachiyar* SMART IRRIGATION SYSTEM USING ARDUINO SSRG International Journal of Electronics and Communication Engineering - (ICRTECITA-2017) - Special Issue - March 2017
- [5] Er.Sukhjot Singh1, Er.Neha Sharma2 Research Paper on Drip Irrigation Management using wireless sensors The research paper published by IJSER journal is about Research Paper on Drip Irrigation Management using wireless sensors 1 ISSN 2229-5518



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)