



# IJRASET

International Journal For Research in  
Applied Science and Engineering Technology



---

# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 9      Issue: VII      Month of publication: July 2021**

**DOI: <https://doi.org/10.22214/ijraset.2021.36380>**

**[www.ijraset.com](http://www.ijraset.com)**

**Call:  08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# Structural Analysis of Cantilever Retaining Wall using STAAD PRO and Compare with Manual Calculations

Nikhil Nimkarde<sup>1</sup>, Prof. Vishal Sapate<sup>2</sup>

<sup>1</sup>P.G. Student, <sup>2</sup>Assistant Professor, Department of Civil Engineering, G. H. Rasoni University, Amravati, Maharashtra, India

**Abstract:** Reinforced concrete retaining walls have a vertical or sloping stem cast by the base plate. They are considered suitable for a height of 6 m. It resists lateral pressure on the ground by the cantilever action of the stem, plate on the legs and heel plate. The tendency of the wall to slide forward due to lateral pressure on the ground should be investigated, and a safety factor of 1.5 should be provided against slipping. Consolidated retaining walls are best at a height of 6 m. For a greater height, the pressure on the ground due to the preserved filling will be higher due to the effect of the lever arm, the base produces higher moments, which leads to a higher section for designing stability, as well as to the design structures of the structure. In this paper, structural analysis should be performed in the case of wall retention with different types of joints and span. The cantilever retaining wall and the buttress retaining wall are modeled for different seismic zones.

**Keywords:** Cantilever retaining wall, stability, sliding, overturning, bearing, pressure, factor, safety

## I. INTRODUCTION

Earth-sustaining structures are ubiquitous in a man-made environment. However, their use has increased significantly in recent decades due to the great progress in technological, social and economic developments that have taken place. Reinforced concrete cantilever retaining walls are considered more economical compared to traditional mass concrete or brick gravity wall analogues. This is because, unlike the latter, the material of which is used exclusively for its dead weight, in the cantilever walls the backfill itself significantly contributes to the required dead weight. As a result, the concrete stem can be made relatively slimmer, thus also enhancing the visual appearance and aesthetics of the structure.

## II. REVIEW OF LITERATURE

Ghosh, P., [6] the study presented was to compare and contrast the results of the conventional CECP2 method and its variants with the BS8002 boundary design approach when applied to a reinforced concrete cantilever retaining wall. It was found that in all cases stability is achieved against slipping and overturning.

Kaveh, A. et al [9] studied cantilever retaining walls are economically suitable for wall heights up to 6.0 M, and therefore for heights up to 6.0 M, no other alternative is required. Supporting walls for retaining forts are suitable for holding wall heights from 8.0 M to 10.0 M for standard conditions accepted.

Klukinas, P., etc. [11] studied the dynamic behavior of the cantilever retaining walls during the earthquake is investigated by 1-g table testing, conducted on scalable models in the Bristol Laboratory for Advanced Dynamics (BLAGIC) Bristol University, UK. The experimental program covers different combinations of containment wall geometry, soil configuration and soil input movements.

## III. MODELING

The different models are prepared and the step by step procedure is adopted in the STAAD-PRO software as follows.

The models are prepared in this work for cantilever and counterfort retaining wall are as follows

- 1) Cantilever- Cantilever- Model-I (5m X 5m)
- 2) Cantilever- Model-II (7.5m X 7.5m)
- 3) Cantilever- Model-III (10m X 10m)
- 4) Cantilever- Model-IV (12.5m X 12.5m)
- 5) Cantilever- Model-V (15m X 15m)
- 6) Cantilever- Model-VI (5m X 3m)
- 7) Cantilever- Model-VII (7.5m X 5m)
- 8) Cantilever- Model-VIII (10m X 7m)
- 9) Cantilever- Model-IX (12.5m X 10m)
- 10) Cantilever- Model-X (15m X 12.5m)

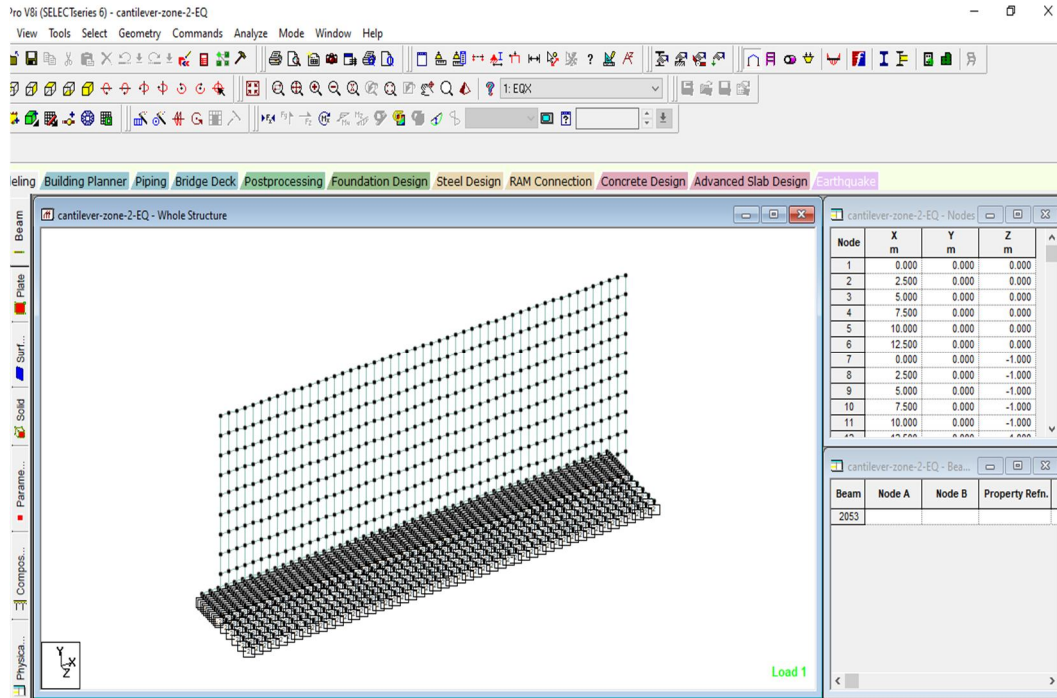


Figure 1: Geometry of the model (Cantilever retaining wall)

The above figure gives the details about the geometry of the structure which is the first step to be followed in STAAD software.

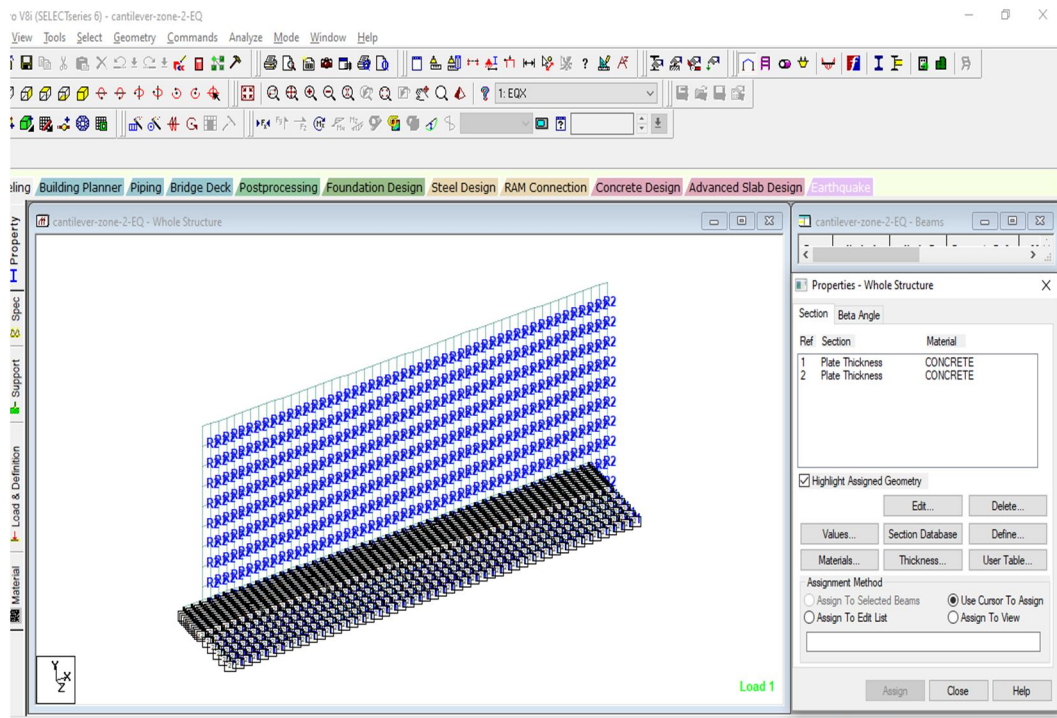


Figure 2: Assignment of the property to the model

The above figure gives the details of the assignment of the property to the model which is the next step after model is prepared.

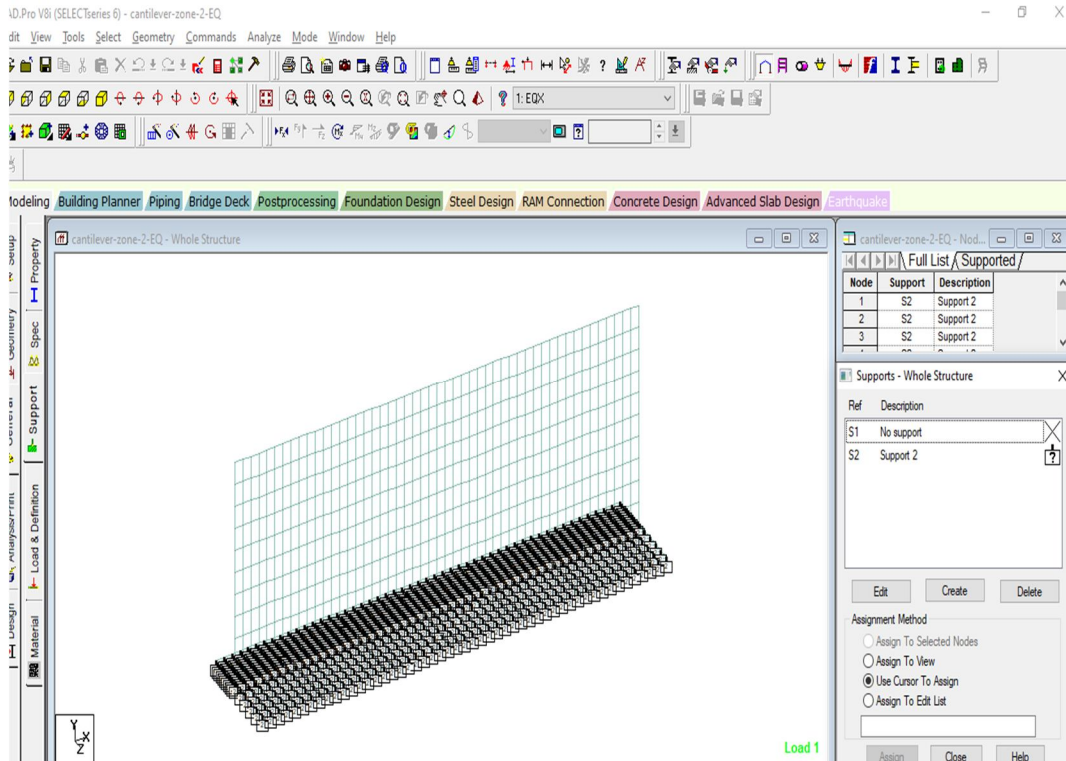


Figure 3: Assigning support to the model

The above figure gives the details of the assigning support to the model after the property is assigned to the model.

#### IV. RESULTS

The analysis is carried out in STAAD-PRO software and the results obtained as follows

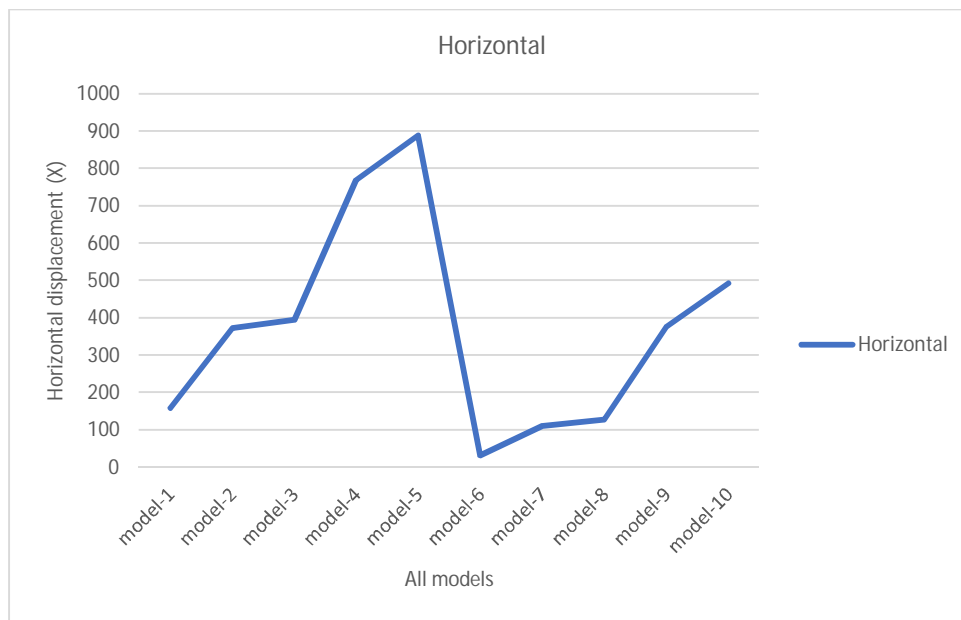


Figure 4: Horizontal Displacement (X) for all models

From the above figure it is observed that the Horizontal Displacement (X) is found to be maximum in the model-5 as compared to other models.

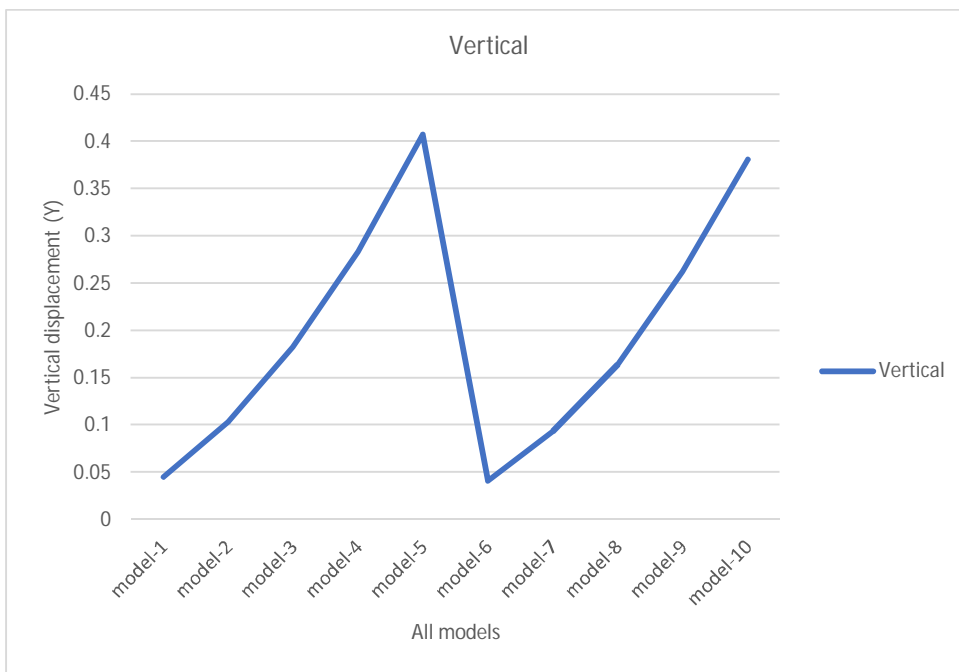


Figure 5: Vertical Displacement (Y) for all models

From the above figure it is observed that the Vertical Displacement (Y) is found to be maximum in the model-5 and minimum in the model-1 as compared to other models.

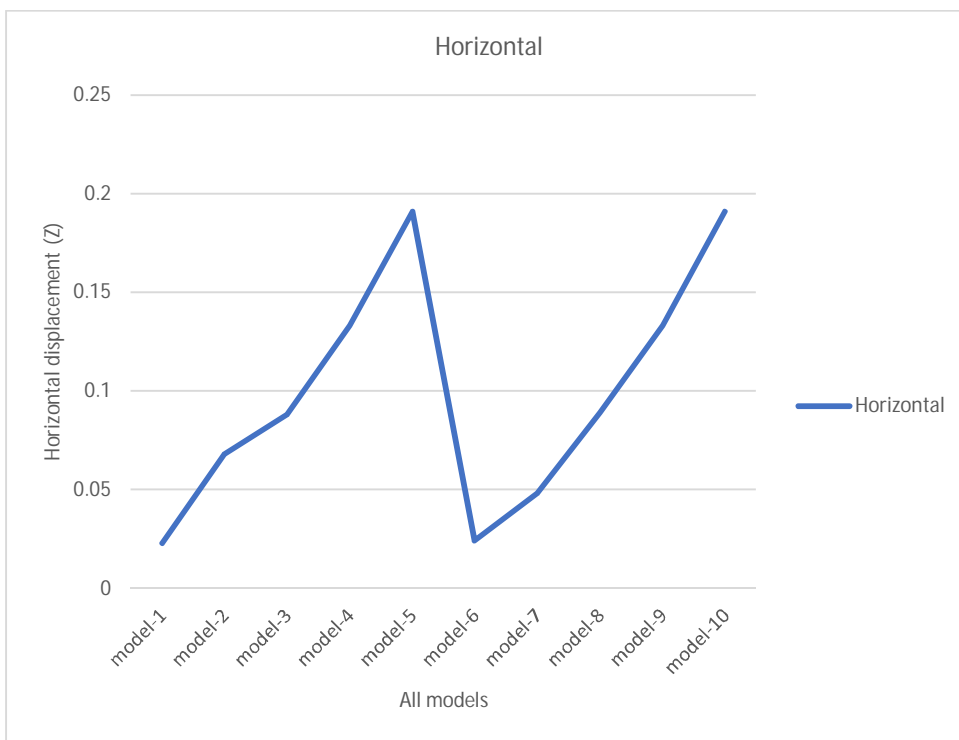


Figure 6: Horizontal Displacement (Z) for all models

From the above figure it is observed that the Horizontal Displacement (Z) is found to be maximum in the model-10 as compared to other models.

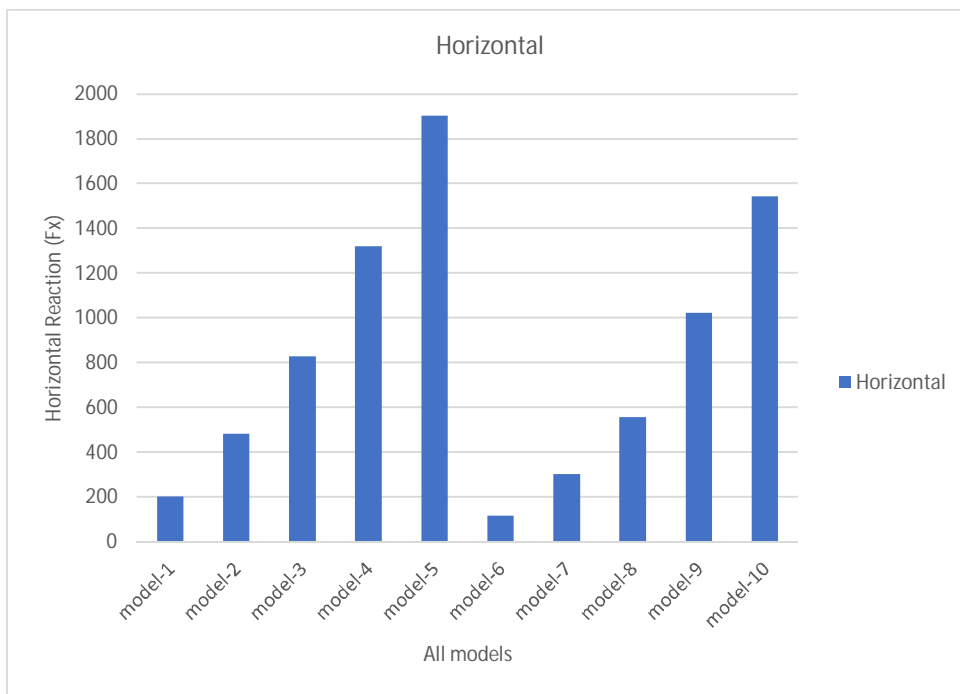


Figure 7: Horizontal (Fx) reaction for all models

From the above figure it is observed that the Horizontal (Fx) reaction is found to be maximum in the model-5 and minimum in the model-6 as compared to other models.

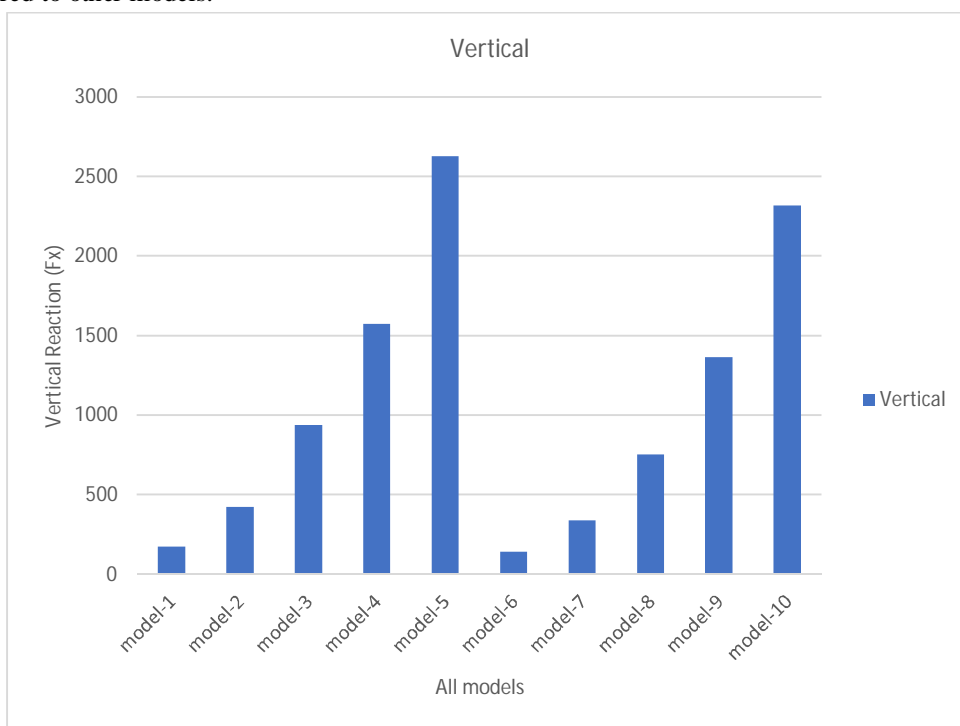


Figure 8: Vertical (Fy) reaction for all models

From the above figure it is observed that the Vertical (Fy) reaction is found to be maximum in the model-5 and minimum in the model-6 as compared to other models.

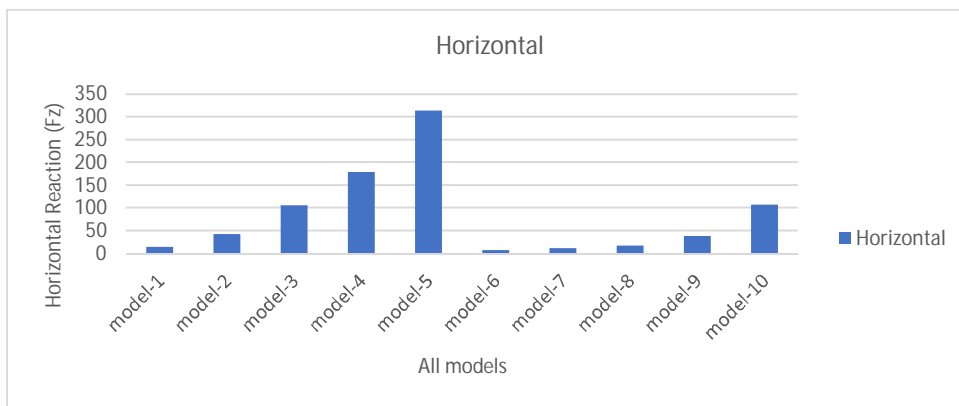


Figure 9:Horizontal (Fz) reaction for all models

From the above figure it is observed that the Horizontal (Fz) is found to be maximum in the model-5 and have the value of 300 kN as compared to other models.

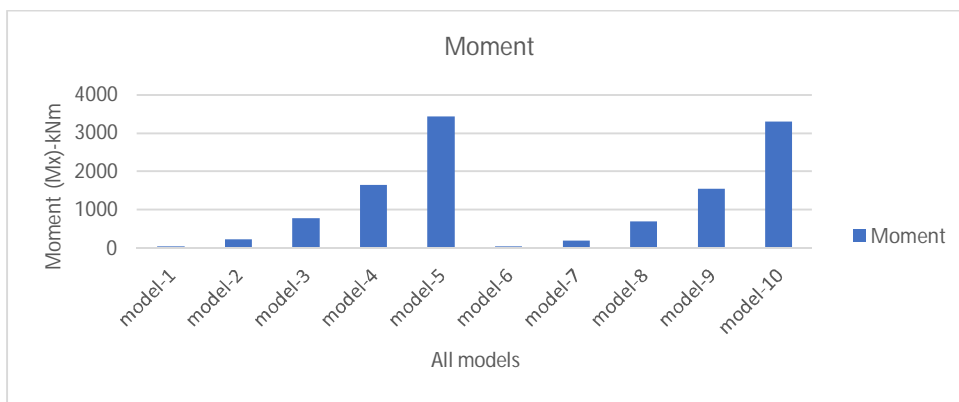


Figure 10: Moment (Mx) for all models

From the above figure it is observed that the Moment (Mx) is found to be maximum in the model-5 and have the value of 3500 kNm as compared to other models.

## V. CONCLUSION

The conclusions from the above study are as follows:

- A. From the above results it is observed that the Horizontal Displacement (X) is found to be maximum in the model-5 as compared to other models. Also it is observed that the Vertical Displacement (Y) is found to be maximum in the model-5 and minimum in the model-1 as compared to other models.
- B. From the above results it is observed that the Horizontal Displacement (Z) is found to be maximum in the model-10 as compared to other models. Also it is observed that the Horizontal (Fx) reaction is found to be maximum in the model-5 and minimum in the model-6 as compared to other models.
- C. From the above results it is observed that the Vertical (Fy) reaction is found to be maximum in the model-5 and minimum in the model-6 as compared to other models. Also it is observed that the Horizontal (Fz) is found to be maximum in the model-5 and have the value of 300 kN as compared to other models.
- D. From the above results it is observed that the Moment (Mx) is found to be maximum in the model-5 and have the value of 3500 kNm as compared to other models. Also it is observed that the Horizontal (Fz) is found to be maximum in the model-5 and have the value of 6500 kNm as compared to other models.
- E. From the above results it is observed that the Moment (Mz) is found to be maximum in the model-5 and minimum in the model-6 as compared to other models. Also it is observed that the Shear stress (Sqx) is found to be minimum in the model-6 as compared to other models.

## REFERENCES

- [1] Abhay Guleria, Al Atik L., Sitar N. (2010), Seismic Earth Pressures on Cantilever Retaining Structures, *Journal of Geotechnical and Geoenvironmental Engineering*, ASCE, 136:10, 1324-1333
- [2] Al Atik, L. and Sitar, N., 2010. Seismic earth pressures on cantilever retaining structures. *Journal of Geotechnical and Geoenvironmental engineering*, 136(10), pp.1324-1333.
- [3] Bhattacharya S., Lombardi D., Dihoru L., Dietz M. S., Crewe A.J., and Taylor. C.A. (2012). Chapter 8: Model Container Design for Soil-Structure Interaction Studies"
- [4] Cavallaro A, Maugeri M, Mazzarella R (2001) Static and dynamic properties of Leighton Buzzard sand from laboratory tests. Proc. of 4th int. conf. on recent adv. in geotech. earthquake engrg. and soil dyn. And symposium in honour of Prof. WD Liam Finn, San Diego, California, March 26-31
- [5] Chugh, A.K. and Labuz, J.F., 2011. Numerical simulation of an instrumented cantilever retaining wall. *Canadian geotechnical journal*, 48(9), pp.1303-1313.
- [6] Crewe AJ, Lings ML, Taylor CA, Yeung AK, Andrighetto R (1995). Development of a large flexible shear stack for testing dry sand and simple direct foundations on a shaking table. In: Elnashai (ed) *European seismic design practice*, Balkema, Rotterdam
- [7] Dembicki, E. and Chi, T., 1989. System analysis in calculation of cantilever retaining walls. *International journal for numerical and analytical methods in geomechanics*, 13(6), pp.599-610.
- [8] Ertugrul, O.L. and Trandafir, A.C., 2013. Lateral earth pressures on flexible cantilever retaining walls with deformable geofoam inclusions. *Engineering Geology*, 158, pp.23-33.
- [9] Eurocode 7 (2003), *Geotechnical Design, Part 1: General Rules*, CEN, E.C. for Standardization, Bruxelles.
- [10] Eurocode 8, (2003). *Design provisions for earthquake resistance of structures, Part 5: Foundations, retaining structures and geotechnical aspects*, CEN E.C. for Standardization, Bruxelles.
- [11] Evangelista A., Scotto di Santolo A. (2011). Dynamic active earth pressure on cantilever retaining walls. *Computers and Geotechnics*, 38:8, 1041-1051.
- [12] Evangelista A., Scotto di Santolo A., Simonelli A.L. (2010). Evaluation of pseudostatic active earth pressure coefficient of cantilever retaining walls, *Soil Dynamics & Earthquake Engineering*, 30:11, 1119-1128.
- [13] Geraili Mikola, R., Candia, G. and Sitar, N., 2016. Seismic earth pressures on retaining structures and basement walls in cohesionless soils. *Journal of Geotechnical and Geoenvironmental Engineering*, 142(10), p.04016047.
- [14] Ghosh, P., 2008. Seismic active earth pressure behind a nonvertical retaining wall using pseudo-dynamic analysis. *Canadian Geotechnical Journal*, 45(1), pp.117-123.
- [15] Greco VR. (2001). Active earth thrust on cantilever walls with short heel, *Canadian Geotechnical Journal*, 38:2, 401-409.





10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)