



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 9      Issue: VII      Month of publication: July 2021**

**DOI: <https://doi.org/10.22214/ijraset.2021.36486>**

**[www.ijraset.com](http://www.ijraset.com)**

**Call:  08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# Scheduling of Flyover at Grade Intersection for Amravati

Shradha S. Zanjad<sup>1</sup>, Prof. S. A. Deshmukh<sup>2</sup>

<sup>1</sup>PG student at the Department Of Civil Engineering, Dr. Rajendra Gode Institute Of Technology & Research, Amravati, Maharashtra, India

<sup>2</sup>Assistant Professor at the Prof Ram Meghe Institute of Technology and Reasearch, Badnera., India

**Abstract:** *This work concerns the effective planning of flight at the intersection of classes under a mixed traffic environment. From the results and simulations performed in the SIDRA Intersection software, different points are observed. This work consists of a proposed crossing in Rajamal Square, Amravati. The area is highly populated, and this place offers the need for a good quality intersection. The graph shows that the turn of the 95% of the worst lane of the car per year increases as the year increases. The maximum value is 0.011. The graph shows that the stopping speed, which is detected, decreases as the year increases. The minimum value of the stopping speed is 0.5485. The graph shows that productivity increases over time. The maximum value of the performance index is 0.30.*

**Keywords:** *Flyover, Intersection, SIDRA and traffic performance*

## I. INTRODUCTION

The crossing of the bridge is a crossroads that has a special bridge built across the intersection at the level to ensure free flow in two directions on one of the main roads and to reduce congestion in both directions.

This has been seen, over the last few decades, due to increased income and lack of insufficient, a fast and reliable public transport system is increasingly switching to personal vehicles in most cities, leading to massive growth in the automotive population around the world. It is observed that every year the number of vehicles increases by chance. To deal with this situation, it is very difficult to provide additional land according to demand. An alternative arrangement must be provided to reduce or stop congestion. For this purpose, the design of the signal at the intersection or across the bridge or under the passage structure at this place is possible to replace. Bridge or under-pass design is provided after appropriate preliminary studies. But sometimes it is possible that at the end of the project the user may not get a fruitful result.

## II. REVIEW OF LITERATURE

Parthumar K. Patel, Arvind M. Jane "Before and after studying the excess - a study of the case of crossing IIM-An." In this work, the author is working on a short-term study at the IIM-A intersection (Andajan Summer-Mandal Road) before and after the construction of the bridge across. And check the condition of the earth. Assess the performance of the bridge and the impact on traffic.

T. Patel, K. Dave, feasibility study and rapid construction of a flight at the Sahakari Zin intersection on NH-8, Himmatnagar. In this paper, the author checks the feasibility of quickly building Fly over at the intersection of sahakari Zin on NH-8, himmatnagar. He noted that the number of accidents occurs due to high vehicle speed, traffic delay, pedestrian risk, lack of a proper object, such as a symbol, signals and markings.

Arjun, L. Venkat, V. M. Naidu, "Economic feasibility and effective planning of a project for a flight to Visakhapatnam (India) In this article, the author mainly carried out the economic expediency of a flight to Visakhapatnam (India) between Maddilapal and satyam. Acquired benefits and cost of construction of the flight, feasibility study was made.

MuraliSambasivan and Yau soon considered a comprehensive approach in a research paper entitled "Causes and Consequences of Delay in the Malaysian Construction Industry" and tried to analyze the impact of specific causes and specific consequences of project delays. They identified the root causes and consequences of the delay in Malaysia's construction projects by conducting a properly designed survey of the questionnaire with clients, consultants and contractors. In addition, they identified ten key causes of delay and six important consequences of delays, and an empirical relationship was established between them.

From the above research papers it is observed that the proper and efficient scheduling is very much necessary at the grade intersection under the mixed traffic environment.

### III. MODELING

The modeling is carried out in the SIDRA software, the different steps and the parameters are presented as follows.

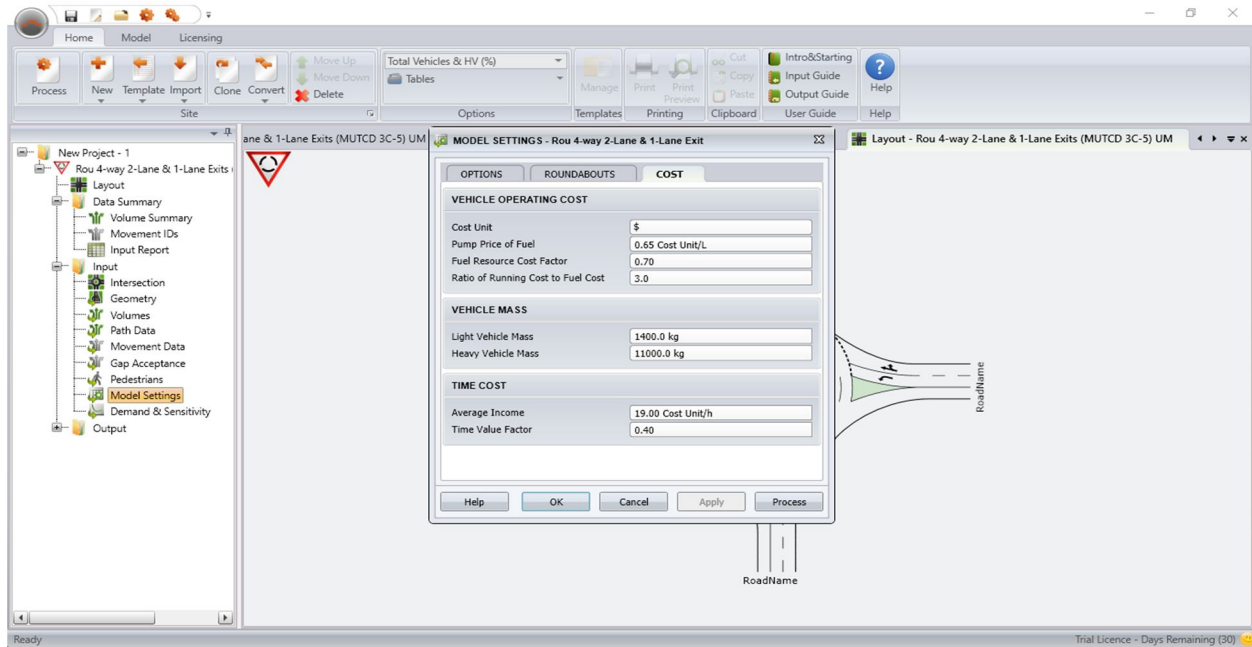


Figure 1: Cost Details (SIDRA software)

The above figure shows the cost details of the model which is considered for the modeling in the SIDRA software.

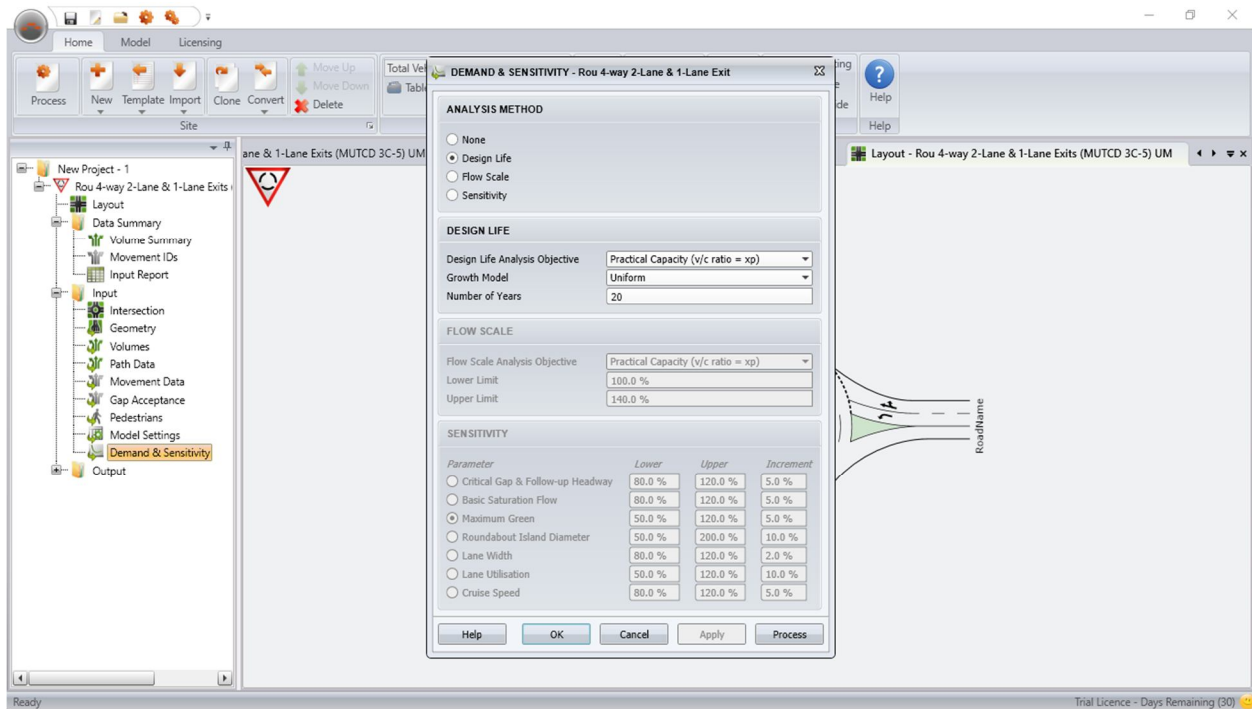


Figure 2: Demand and sensitivity details of the model (SIDRA software)

The above figure shows the Demand and sensitivity details of the model which is considered for the modeling in the SIDRA software.

The table 1 shows the intersection parameters which consists of time, peak flow period considered for the modeling in the SIDRA software.

Table 1: Intersection Parameters (Md Sameer Sohail et al 2020)

|                                    |  |
|------------------------------------|--|
| Title                              | Roundabout with 2-lane approaches and circulating road, and 1-lane exits |
| Intersection ID                    | 1  |
| Unit Time (for volumes)            | 60 minutes   |
| Peak Flow Period (for performance) | 15 minutes   |

The table 2 shows the Geometry – Approach Data consisting of location, number of approach lanes, number of exit lanes, median width and extra bunching which is considered for the modeling in the SIDRA software.

Table 2: Geometry – Approach Data (Md Sameer Sohail et al 2020)

| Location | Name  | Type    | No of App lanes | No of Exit lanes | Median width (m) | Extra Bunching (%) |
|----------|-------|---------|-----------------|------------------|------------------|--------------------|
| South    | Road1 | Two-way | 2               | 1                | –                | 0                  |
| East     | Road2 | Two-way | 2               | 1                | –                | 0                  |
| North    | Road3 | Two-way | 2               | 1                | –                | 0                  |
| West     | Road4 | Two-way | 2               | 1                | –                | 0                  |

#### IV. RESULTS

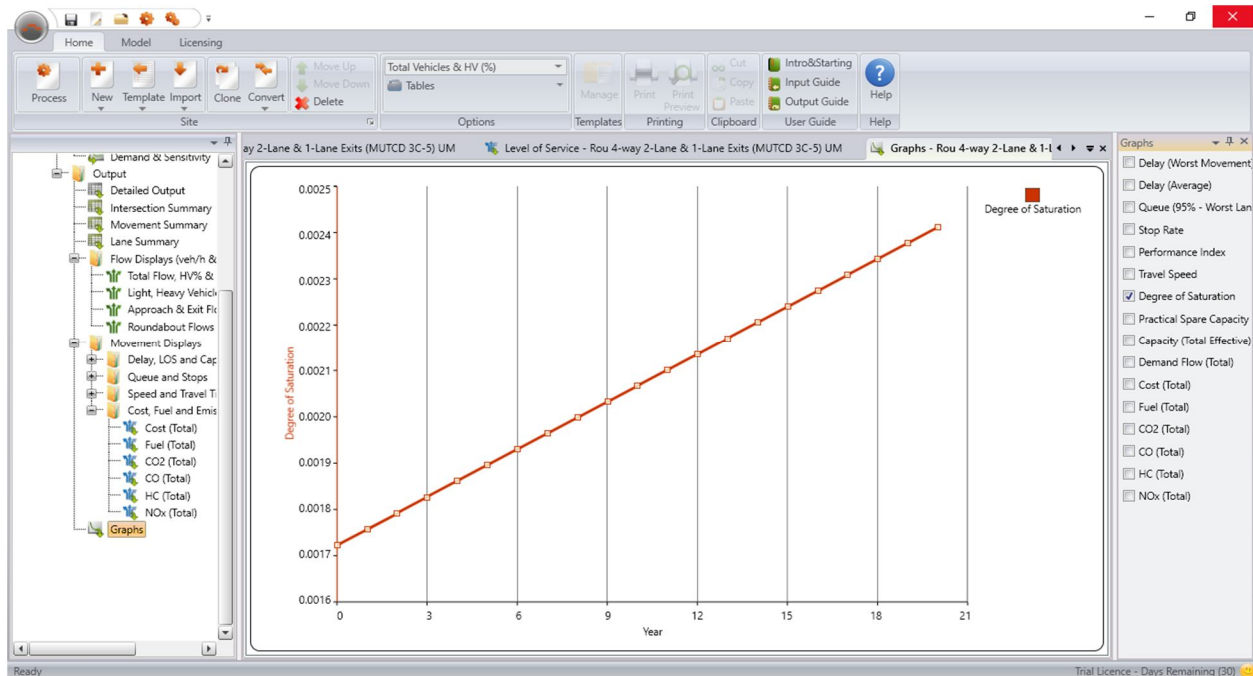


Figure 3: Degree of saturation per year

From the above graph it is observed that the degree of saturation goes on increasing as the year goes on increasing. The maximum value is found to be 0.024

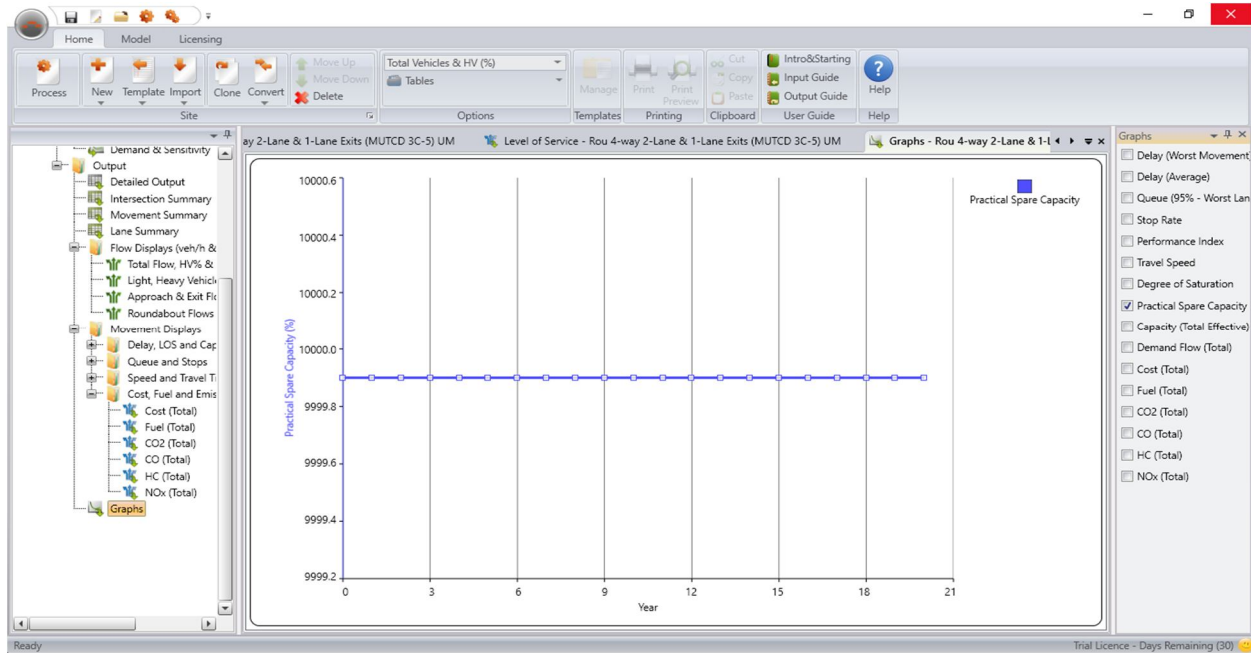


Figure 4: Practical spare capacity (%) per year

The above figure gives the data related to the spare capacity per year for the model in SIDRA software.

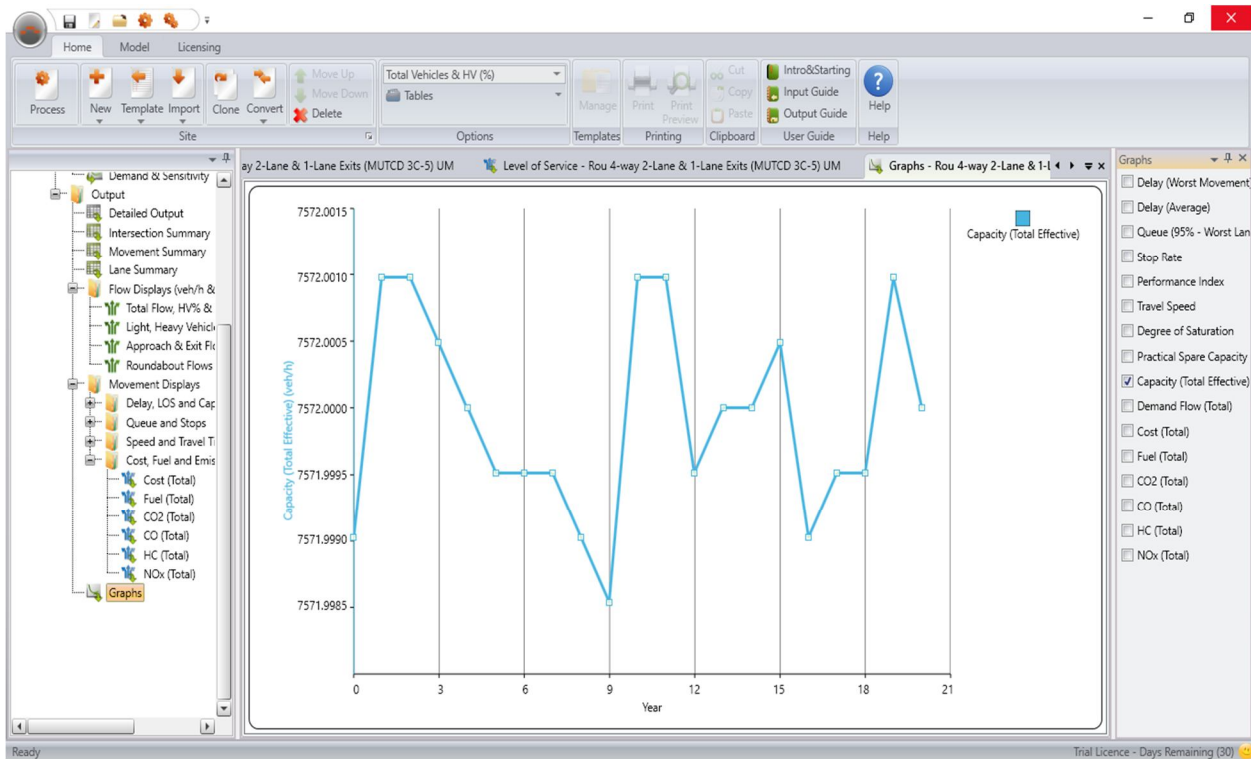


Figure 5: Capacity (total effective) (vehicle per hour)

From the above graph it is observed that the total effective capacity (vehicle per hour) is fluctuating over the years and the maximum value is found to be 7572 (vehicle per hour).

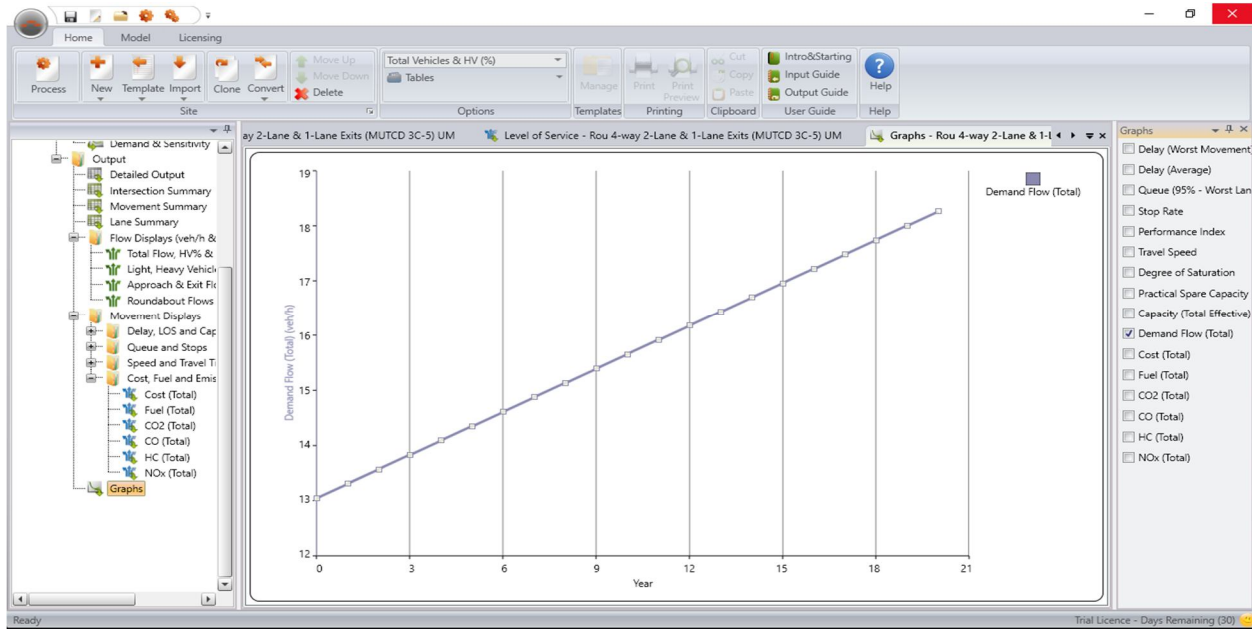


Figure 6: Total demand flow (vehicle per hour)

From the above graph it is observed that the total demand flow (vehicle per hour) goes on increasing as the year increases and the maximum value is found to be 18.5 vehicle per hour.

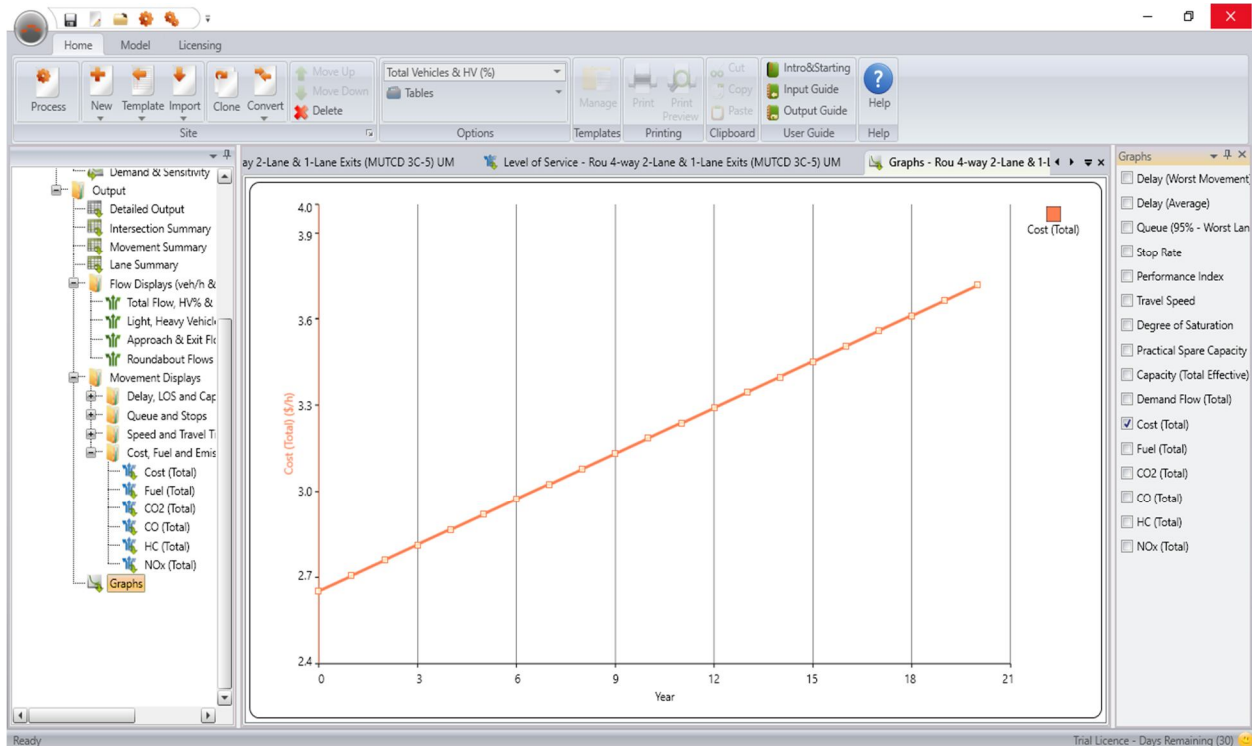


Figure 7: Total cost (\$/h) yearwise

The above figure gives the results about the total cost revenue for the model.

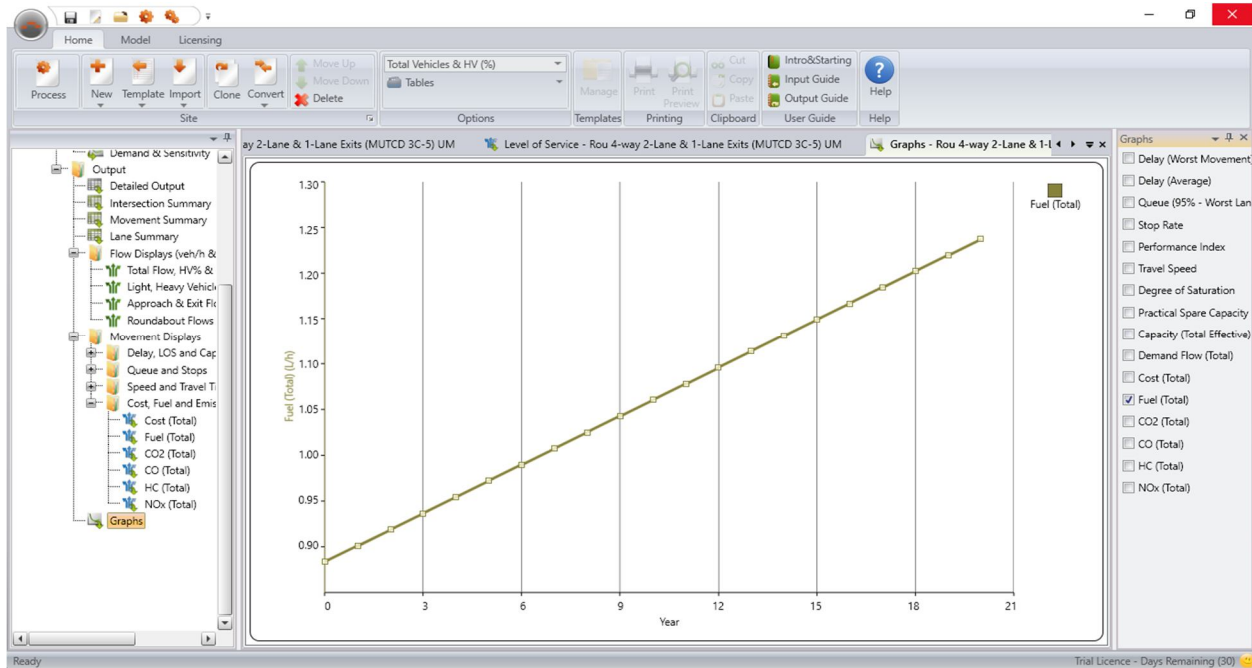


Figure 8: Total fuel (L/h) yearwise

From the above graph it is observed that the total fuel (l/h) goes on increasing as the year increases and the maximum value is found to be 1.25 l/h.

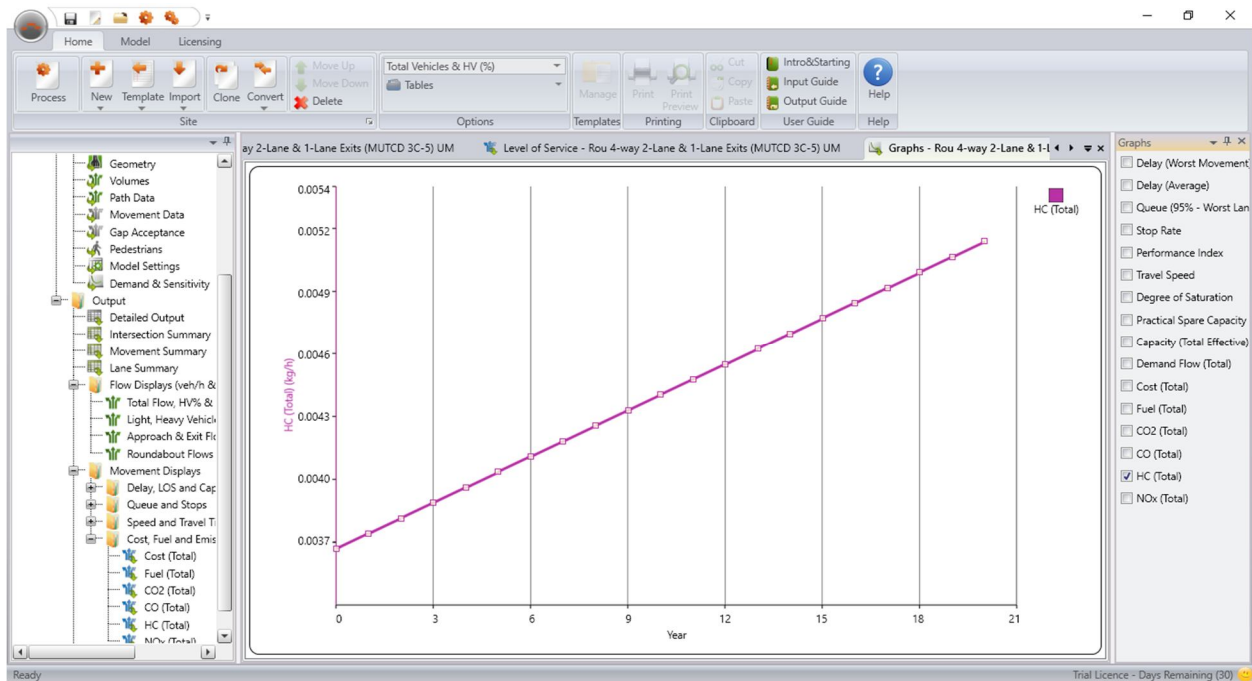


Figure 9: Total HC (kg/h) yearwise

From the above graph it is observed that total HC (kg/h) is found to be increasing as the year goes on increases and the maximum value is found to be 0.0052 kg/h.

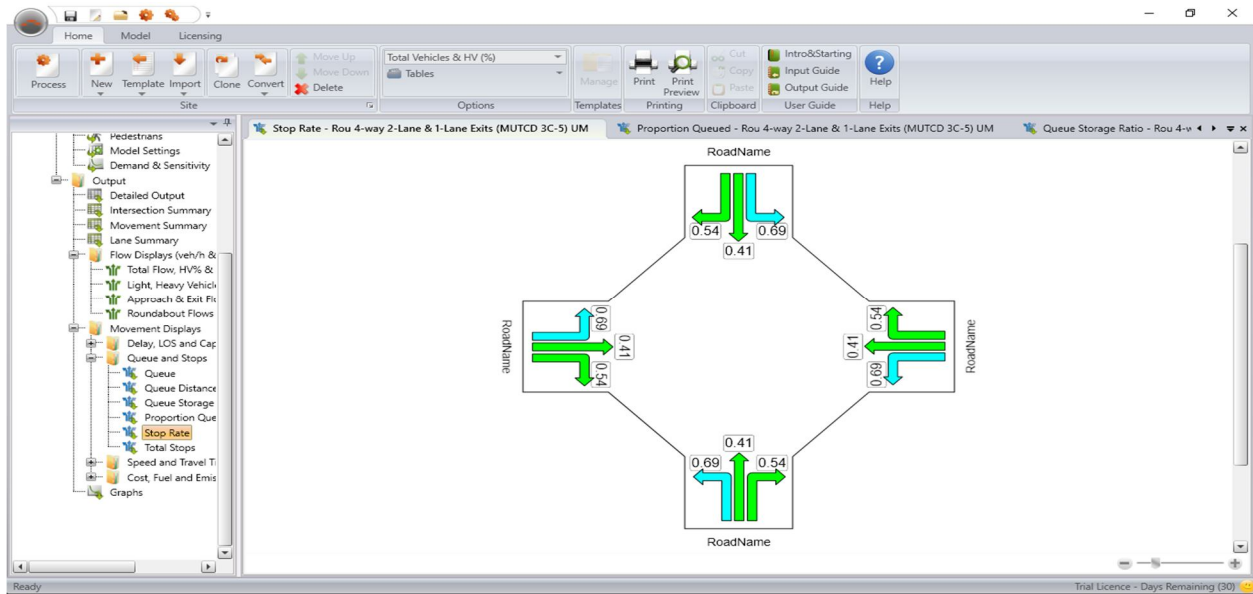


Figure Error! No text of specified style in document..1: Stop rate for the different roads

The above figure gives the results in terms of the stop rate for the different roads.

## V. CONCLUSION

In order to mitigate traffic congestion, several Indian city authorities have taken initiatives to build flyovers at major intersections. However, in most cases there is no comprehensive approach to planning. The place for flyovers was decided on the basis of modern operating conditions or at some times even by the perception of decision-makers, without resorting to an analytical planning approach. The present work consists of the Proposed Intersection at Rajkamal Square, Amravati. The square is highly populated and the need of the good quality intersection is proposed at this location. The results obtained in terms of the stop rate, performance index, cost data in the case of the model in SIDRA software.

## REFERENCES

- [1] Momin Safabanu Fazalmohammed, Prof. H. K. Dave (2014), "Influence of Signal Coordination on travel time and delay", International Journal of Engineering Development and Research, Volume 2, Issue 2 | ISSN: 23219939, 2014.
- [2] MuraliSambasivan and Yau Wen Soon, Causes and Effects of Delays in the Malaysian construction industry, International Journal of Project Management.,25, (2007),517-526.
- [3] Noman Hyder and Md. Ruhul Amin (2013), "Traffic Signal Design of an Isolated Intersection for Dhaka City Condition", Proceedings of 4th Global Engineering, Science and Technology Conference, 27-28 December, 2013.
- [4] P L Mututantri, W D P Abeyasinghe, L S S Wijewardena and K S Weerasekara., "Design of Flyover and Roundabout Underneath it to Ease the Traffic Congestion at the Rahagiriya Junction", The Institution of Engineers, Sri Lanka, Engineer - Vol. XLVIII, No. 04, page (33-47), 2015.
- [5] Pardeep K. Gupta and Ishant Sharma (2015) "Study of Traffic Flow in an Entire Day at a Congested Intersection of Chandigarh", Journal of Civil Engineering and Environmental Technology, ISSN: 2349-879X; Volume 2, Number 12; April-June, 2015.
- [6] Parvathy R et al. (2013), "Development of New PCU Values and Effect of Length of Passenger Cars On PCU", International Journal of Innovative Research in Science, Engineering and Technology, Volume 2, Special Issue 1, December 2013.
- [7] Prabu M, Tamizhazhagan T, Jose Ravindra Raj B., "Design of Flyover Bridge in Trichy", in International Journal of Engineering Sciences & Research Technology(IJESRT), Aril 2017V
- [8] R Shreedhar, "Recent Trends in Design and Construction of Flyover", January 2015. <https://www.researchgate.net/publication/270880543>.
- [9] Rais, F.P. and M.R. Bhatt, "Densification Evaluation of Urban Traffic Noise Pollution- A Case Study of Rajkot City," Ph.D. Thesis, Gujarat Technological University AITS, Rajkot, May 2016.
- [10] Sadi A. Assaf and Sadiq Al-Hejji, Causes of delay in large construction projects, International Journal of Project Management, ELSEVIER, 24, (2006),349-357.
- [11] Suthanaya, P.A. "Modeling road traffic noise for collector road (case study of Denpasar city)" The 5th international conference of Euro Asia civil engineering forum.125(2015)467-473
- [12] T Pramod Kumar, "Analysis and Design of Super Structure of Road cum Railway Bridge across Krishna River", in International Journal of Engineering & Science Research (IJESR), July 2015, Vol-5, Issue-7, 830-838.
- [13] Tiwari, A.V., P.A. Kadu and A.R. Mishra, "Study of noise pollution due to railway and vehicular traffic at level crossing and its remedial measure" AJER,(4),2, (2013)16-19
- [14] Tripura, D.D., "Assessment of highway traffic noise pollution and its impact in and around Agartala, India" Conference paper.(2008)1-6.





10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)