



IJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 4 Issue: VI Month of publication: June 2016

DOI:

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Fuzzy Based PFC Bridgeless Dual Converter Fed BLDC Motor Drive

Assistant Professor N.Lakshmi Priya¹, PG Student R.Sathya²

¹Department of Electrical and Electronics, Jay Shri Ram Group Of Institutions, Tirupur, India

²Department of Electrical and Electronics, Jay Shri Ram Group Of Institutions, Tirupur, India

Abstract— This paper shows another PFC bridgeless (BL) buck–boost converter for brushless direct current (BLDC) engine drive application in low-control applications. A Fuzzy logic execution in adaptable speed control of BLDC engine is done here. A methodology of rate control of the BLDC engine by controlling the dc bus voltage of the voltage source inverter (VSI) is utilized with a solitary voltage sensor. The controller is intended to track varieties of pace references and settles the yield velocity amid burden varieties. The BLDC has a few preferences contrast with the other kind of engines; however the nonlinearity of the BLDC engine drive attributes, in light of the fact that it is hard to handle by utilizing customary relative basic (PI) controller. So as to tackle this fundamental issue, the Fuzzy logic control turns into a suitable control. To give an inborn PFC at supply ac mains a converter based on buck-boost type is intended to work in broken inductor current mode (DICM). The execution of the proposed commute is mimicked in MATLAB/ Simulink environment.

Keywords— Fuzzy logic (FL), Bridgeless (BL) buck–boost converter, discontinuous inductor current mode (DICM), power factor correction (PFC).

I. INTRODUCTION

Since 1980's a new plan idea of changeless magnet brushless engines has been created. The Changeless magnet brushless engines are ordered into two sorts based upon the back EMF waveform, brushless Air conditioning (BLAC) and brushless DC (BLDC) engines [1]. BLDC engine has trapezoidal back EMF and semi rectangular current waveform. BLDC engines are quickly getting to be well known in businesses, for example, Appliances, HVAC industry, restorative, electric footing, car, airplanes, military gear, hard plate drive, mechanical computerization gear and instrumentation due to their high effectiveness, high power element, noiseless operation, minimized, dependability and low support [2]. To supplant the capacity of commutator and brushes, the BLDC engine requires an inverter and a position sensor that distinguishes rotor position for legitimate substitution of current. The revolution of the BLDC engine is in light of the criticism of rotor position which is gotten from the corridor sensors.

BLDC engine ordinarily employments three lobby sensors for deciding the recompense Grouping. In BLDC engine the force misfortunes are in the stator where warmth can be effectively exchanged through the edge or cooling frameworks are utilized as a part of expansive machines. BLDC engines have numerous focal points over DC engines and prompting engines. A percentage of the favourable circumstances are better speed versus torque qualities, high element react ion, high proficiency, long working life, quiet operation; higher pace ranges [3].

Up to now, more than 80% of the controllers are PI (Relative and vital) controllers on the grounds that they are effort less and straightforward. The velocity controllers are the routine PI controllers and current controllers are the P controllers to accomplish superior commute. Fuzzy Logic can be considered as scientific hypothesis joining multi-esteemed rationale, likelihood hypothesis, and counterfeit consciousness to recreate the human approach in the arrangement of different issues by utilizing an estimated thinking to relate diverse information sets and to make choices. It has been accounted for that fluffy controllers are more powerful to plant parameter changes than traditional PI or controllers and have better clamor dismissal capacities.

This paper presents a BL buck–boost converter-fed BLDC motor drive with variable dc link voltage of VSI for improved power quality at ac mains with reduced components and superior control

II. PRINCIPLE OF BLDC MOTOR

BLDC engine comprises of the perpetual magnet rotor and an injury stator. The brushless engines are controlled utilizing a three stage inverter. The engine obliges a rotor position sensor for beginning and for giving legitimate compensation arrangement to turn on the force gadgets in the inverter extension. In light of the rotor position, the force gadgets are commutated consecutively every 60 degrees. The electronic compensation takes out the issues connected with the brush and the commutator plan, in particular starting and destroying of the commutator brush course of action, along these lines, making a BLDC engine more rough contrasted with a dc engine. The brush less dc engine comprise of four fundamental parts Power converter, changeless magnet brushless DC Motor

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

(BLDCM), sensors and control calculation. The force converter changes power from the source to the BLDCM which thus changes over electrical vitality to mechanical vitality. One of the remarkable highlights of the brush less dc engine is the rotor position sensors, in view of the rotor position and order signals which may be a torque charge, voltage summon rate order etc; the control calculations focus the entryway sign to every semiconductor in the force electronic converter. The structure of the control calculations decides the sort of the brush less dc engine of which there are two principle classes voltage source based drives and current source based drives. Both voltage source and current source based commute utilized for perpetual magnet brushless DC machine. Be that as it may, machine with a non sinusoidal back emf brings about diminishment in the inverter size and lessens misfortunes for the same influence level.

III. PROPOSED SYSTEM

The proposed BL buck–boost converter based VSI-fed BLDC motor drive is shown in fig.1. The parameters of the BL buck–boost converter are made such that it operates in discontinuous inductor current mode (DICM) to attain an inherent power factor correction at ac mains. The speed control of BLDC motor is accomplished by the dc link voltage control of VSI using a BL buck–boost converter. This reduces the switching losses in VSI because of the low frequency operation of VSI for the electronic commutation of the BLDC motor. In the proposed arrangement of bridgeless buck-boost converter has the base number of parts and slightest number of conduction gadgets amid every half cycle of supply voltage which administers the decision of BL buck-boost converter for this application. The operation of the PFC bridgeless buck-boost converter is ordered into two parts which incorporate the operation amid the positive and negative half cycles of supply voltage and amid the complete exchanging cycle.

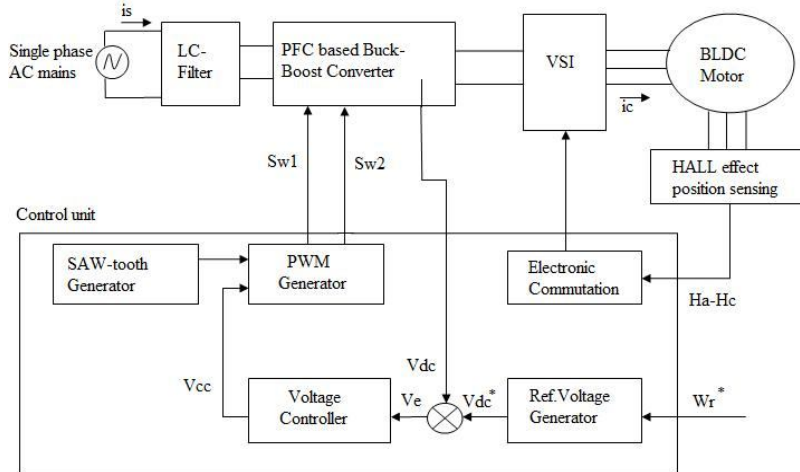


Fig.1 Proposed BLDC motor drive with front-end BL buck– boost converter

A. Operation During Positive and Negative Half Cycle of Supply Voltage

In this mode converter switches Sw1 and Sw2 are work in positive and negative half cycle of supply voltage individually. A mid positive half cycle switch SW1, inductor Li1 and diodes D1 and D2 are worked to exchange vitality to DC join capacitor Cd. Thus in negative half cycle of supply voltage switches Sw2, inductor Li2 and diode D2 In Irregular Inductor Current Mode(DICM) operation of converter the present in the inductor Li gets to be irregular for certain term in an exchanging period.

B. Operation During Complete Switching Cycle

In this exchanging cycle there are three methods of operation.

Mode I: In this mode, switch Sw1 conducts for charging the inductor Li1, thus the inductor current i_{Li1} increments in this mode. Diode D1 finishes the information side and the DC join capacitor Cd is released by VSI nourished BLDC engine.

Mode II: In this method of operation switch Sw1 is killed furthermore, the put away vitality from the inductor Li1 is exchanged to DC join capacitor Cd till the inductor is completely released furthermore; current in the inductor is completely lessened to zero.

Mode III: In this method of operation inductor Li1 work in intermittent conduction mode and diodes and switch are in off condition. As of now DC join capacitor Cd begins releasing. This operation can be proceeding up to switch Sw1 is turned on once more.

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

V. SIMULATION RESULTS

The below figures shows the simulation diagrams of this system. The performance of the proposed BLDC motor drive is simulated in MATLAB/Simulink environment using the Sim-Power-System tool box. The performance evaluation of the proposed drive is categorized in terms of the performance of the BLDC motor and BL buck-boost converter and the achieved power quality indices obtained at ac mains.


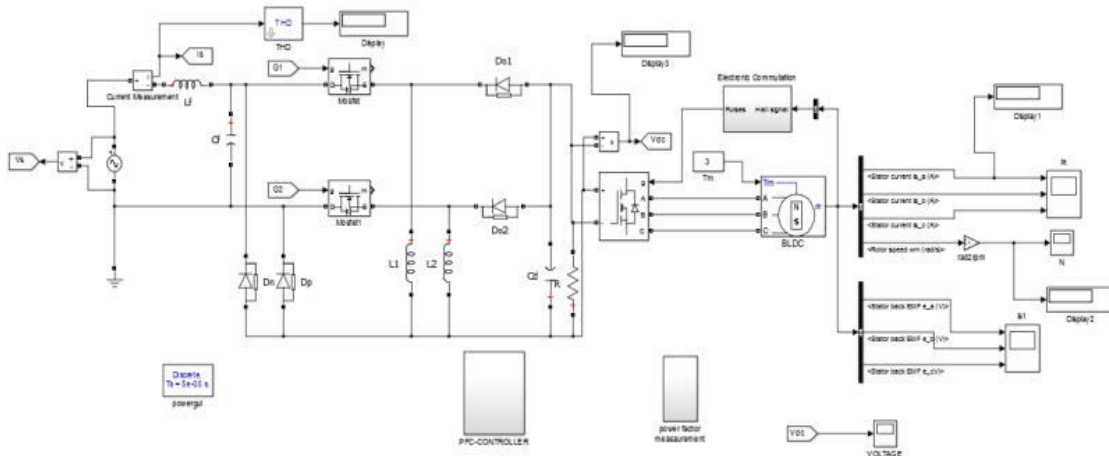


Fig. 5 Simulation circuit diagram

A. Waveforms

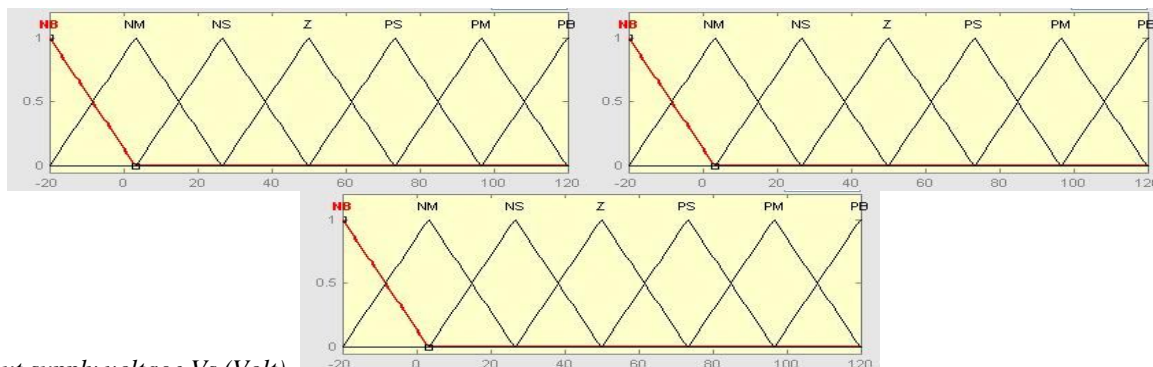

1) Input supply voltage V_s (Volt)

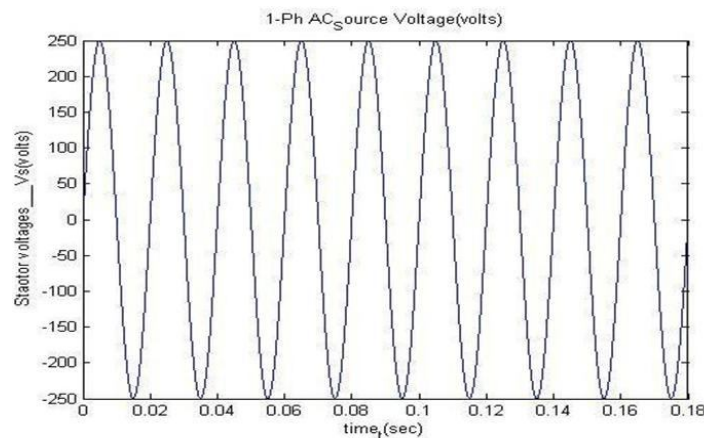


Fig. 6 Input supply voltage

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

2) Dc link voltage V_{dc} (Volt)

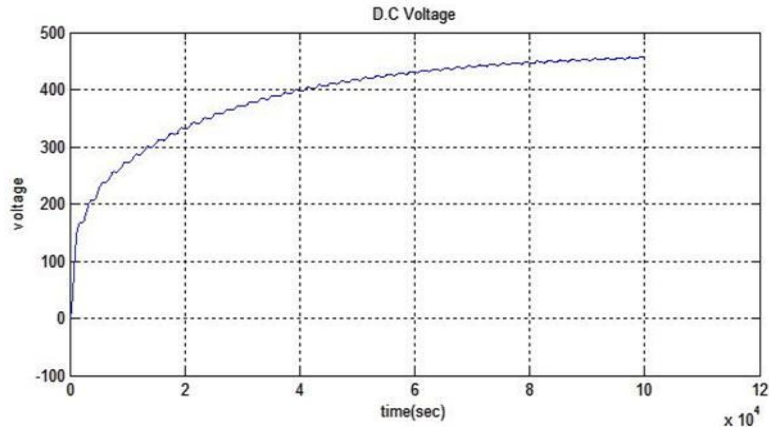


Fig. 7 DC link voltage

3) Stator voltages V (volt)

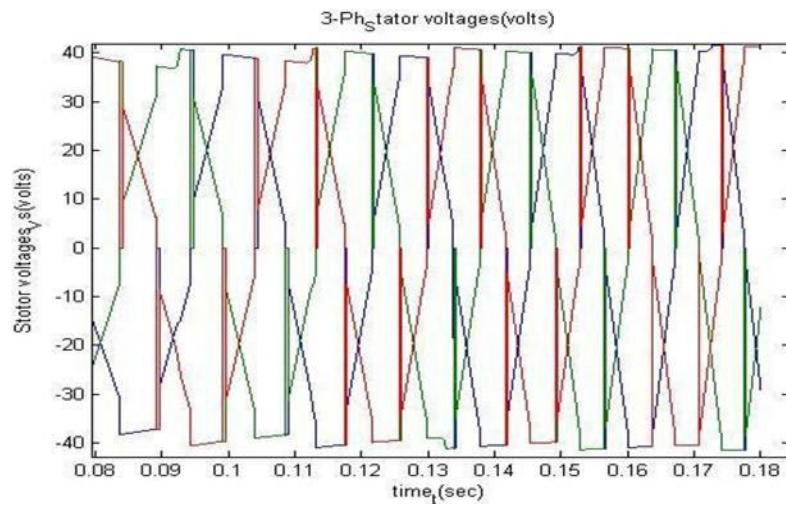


Fig. 8 Stator voltages

4) Stator current A (Amps)

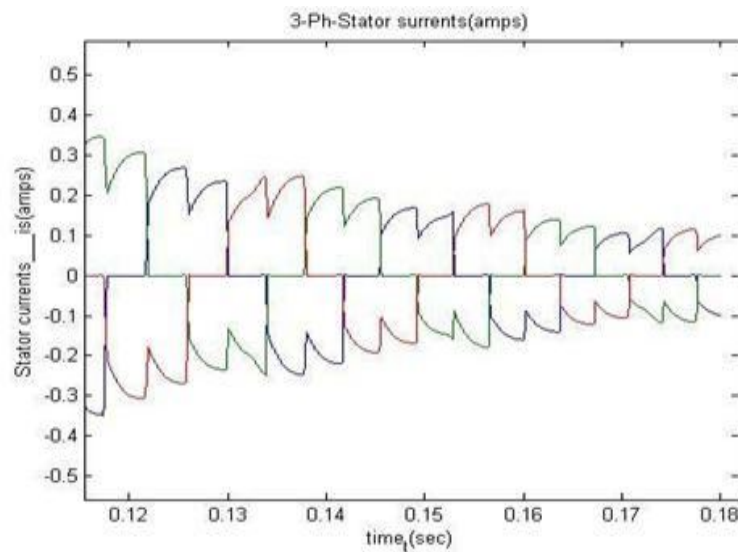


Fig. 9 Stator current

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

5) Motor Speed $N(\text{rpm})$

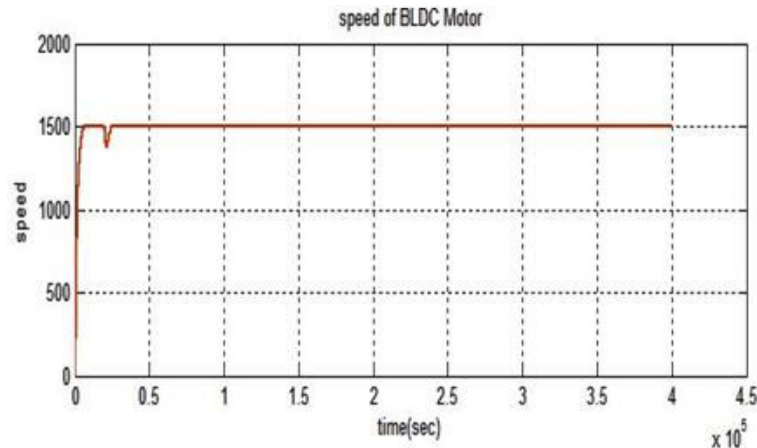


Fig. 10 Motor Speed

VI. CONCLUSIONS

The dynamic characteristics of the brushless DC motor such as speed, torque, current and voltage of the inverter components are observed and analysed using the developed MATLAB model. Proposed fuzzy logic controller system has a good adaptability and strong robustness whenever the system is disturbed. The simulation model which is implemented in a modular manner under MATLAB environment allows dynamic characteristics such as phase currents, rotor speed, and mechanical torque to be effectively considered.

REFERENCES

- [1] G. Sakthival, T.S. Anandhi and S.P. Natarjan. 2010. Real time implementation of DSP based Fuzzy logic controller for Speed control of BLDC motor. International Journal of Computer Applications (0975 - 8887).
- [2] K. Naga Su jatha, K. Vaisakh and Anand. G. 2010. Artificial Intelligence based speed control of brushless DC motor. IEEE 978-1-4244-6551-4/ 10.
- [3] 2003. AN885 - Brushless DC (BLDC) Motor Fundamentals. Microchip Technology Inc.
- [4] R. Akkaya, A.A. Kulaksız, and O Aydogdu, DSP implementation of a PV system with GA -M LP-NN based MPPT controller supplying BLDC motor drive, Energy Conv. and Management 48, 210-218, 2007.
- [5] P. Pillay and R. Krishnan, Modeling, simulation, and analysis of permanent-magnet motor drives, part II: the brushless DC motor drive, IEEE Trans. on Industry Applications 25, 274–279, 1989.
- [6] P.D. Evans and D. Brown, Simulation of brushless DC drives, Proc. of the IEE 137, 299– 308, 1990.
- [7] R. Carlson, M. Lajoie-Mazenc, and C.D.S. Fagundes, Analysis of torque ripple due to phase commutation in brushless DC machines, IEEE Trans. on Industry Applications 28, 632–638, 1992.
- [8] S.K. Safi, P.P. Acarnley, and A.G. Jack, Analysis and simulation of the high-speed torque performance of brushless DC motor drives, Proc. of the IEE 142, 191–200, 1995.
- [9] J. Figueroa, C. Brocart, J. Cros, and P. Viarouge, Simplified simulation methods for polyphase brushless DC motors, Mathematics and Computers in Simulation 63, 209–224, 2003.
- [10] C.W. Hung; C.T. Lin, and C.W. Liu, An Efficient Simulation Technique for the Variable Sampling Effect of BLDC Motor Applications, IECON 2007, pp. 1175– 1179, 2007.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)