



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 4

Issue: V

Month of publication: May 2016

DOI:

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Review Paper on Brake Shoe Failure

Ambikaprasad.O.Chaubey¹, Prof.Abhijeet.A.Raut²

^{1,2} Department of Mechanical Engineering, GHRCE, Nagpur

Abstract: Brake shoe is the component which is mainly used in braking system. Indian railway braking system is one of the complex and high maintenance processes system. Mainly due to the less quality material of the brake shoe used in railway it comes under high maintenance zone due to which brake shoe get fired usually. As the brake shoe catch fire the material of the brake shoe melt and stick with the wheels of the train and changes the inner dimension of the wheel which leads to damage of wheel and increase the chances of accident.

In this paper we are going to do analysis on brake shoe by some software which will help to find stress analysis and thermal analysis and finally suggest some solution in relation to the material of the brake shoe.

Keyword: component, maintenance, stick, inner dimension, accident

I. INTRODUCTION

Brake shoe plays an important role in the braking system .Currently the brake shoe used in Indian railway is “L Type UIC 270”. The maximum durability of this material is one month and some in single journey it may be replaced. So while study on the material we got to know that resins plays an important role in the composition of the material of the brake shoe. However the resin material use now a day is phenolic resin.

So in this project we are studying on different resin material properties to overcome the problem of durability, sustainability of brake shoe with the help of some analysis software.



Fig1:-Brake shoe on ICF Bogies

II. DEFECT ON BRAKE SHOE

- A. Cracks on wheel of the ICF bogie due to improper adjustment of brake shoe in the braking system
- B. Brake shoe melt and layer get stick on the wheel due to high temperature between the brake shoe and the wheel.
- C. Material composition, load, heating, stress generation due to improper braking system.

III. CONDITION OF BRAKE SHOE AND WHEEL



Fig 2: CONDITION OF BRAKE SHOE


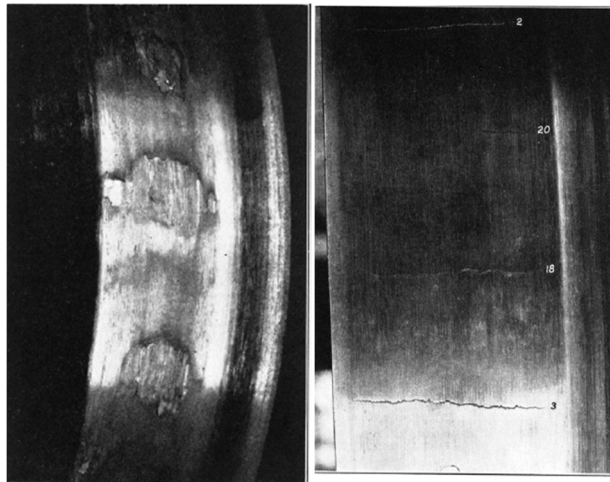


Fig 3: DEFECTIVE OF WHEEL

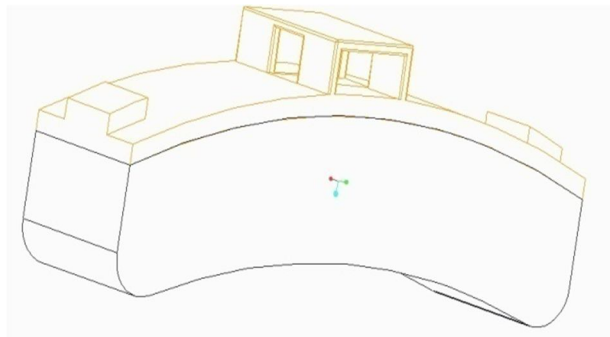

WIREFRAME MODEL OF BRAKE SHOE

IV. THEROTICAL CALCULATION

A. Force of Brake Shoe

$$F_t = R_n \times \mu$$

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

- 1) F_t = Tangential braking force
 - 2) R_n = Normal force pressing the brake block on the wheel
 - 3) μ = Coefficient of friction = 0.4, (reference Design book)
- B. Coefficient Of Friction

$$\mu = \frac{F_t}{R_n}$$

Another formula if angle of contact is more than 60°

$$\mu' = \frac{4\mu \sin \theta}{2\theta + \sin 2\theta}$$

Angle of contact is 100° ,
Therefore, equivalent coefficient of friction,

$$\mu' = \frac{4.00 \times 0.41 \sin 50}{1.782 + \sin 100}$$

$$\text{Where, } 2\theta = \frac{\pi}{180} \times 100 = 1.782$$

$$\mu' = 0.4556$$

C. Calculation Of Tangential Force

Taking moments about the fulcrum O^1 , we have

$$P \times l = R_n^1 \times x + F_t^1 \times a$$

$$P \times 455 = R_n^1 \times 210 + F_t^1 \times (178 - 48)$$

$$\text{Substituting } R_n^1 = \frac{F_t^1}{\mu}$$

$$P \times 455 = 578.41 F_t$$

$$F_t^1 = \frac{P \times 455}{578.41}$$

$$F_t^1 = 0.755 \times P$$

Taking moments about the fulcrum O^2 , we have

$$P \times 455 + F_t^2 \times (178 - 48) = R_n^2 \times 210$$

$$\text{Substituting } R_n^2 = \frac{F_t^2}{\mu}$$

$$F_t^2 = \frac{P \times 455}{319.45}$$

$$F_t^2 = 1.459 \times P$$

'P' applied at end of the lever is 3697 N
Tangential force, on the right hand side

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

$$Ft^1 = 2685.51 N$$

Tangential force, on the left hand side

$$Ft^2 = 5665 N$$

Ft^2 is maximum so we will design the shoe with Tangential force, Ft^2

D. Calculation Of Normal Force

Normal force, on the right hand side

$$Rn^1 = \frac{2783.23}{0.451}$$

$$Rn^1 = 6266 N$$

Normal force on the left hand side of the shoe

$$Rn^2 = \frac{5913}{0.451}$$

$$Rn^2 = 12290 N$$

Rn^2 is maximum so we will design the shoe with Normal force.

E. Width Of Brake Shoe

Let,

b= width of the brake shoes in mm.

We know that projected bearing area for one shoe

$$Ab = b(2r \sin \theta)$$

$$Ab = b(2 \times 1.7512 \sin 50)$$

$$Ab = 268.00 b$$

Rn^2 is maximum so we will design the shoe with normal force ,

$$Pb = \frac{Rn^2}{Ab}$$

$$0.3 = \frac{12290}{268.00b}$$


$$B = 84.12 \text{ MM}$$

F. Involvement Of Software


- 1) Cero, Pro-E software.
- 2) ANSYS.

V. LIFE OF BRAKE SHOE

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

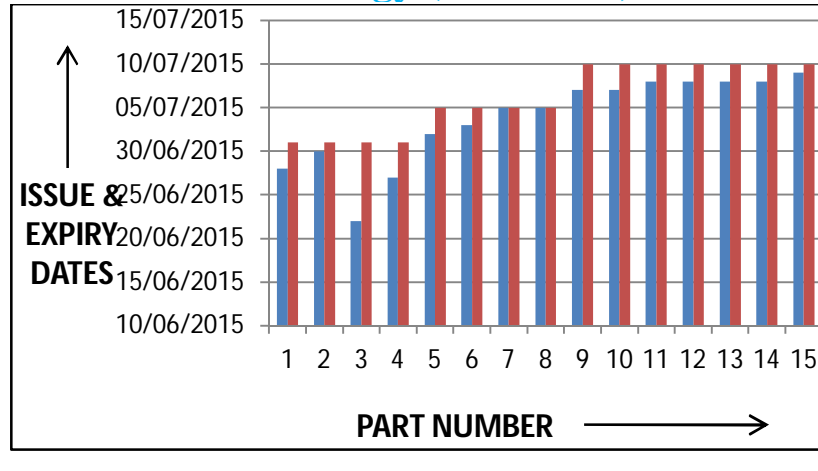

SOLID MODEL DIAGRAM OF BRAKE SHOE

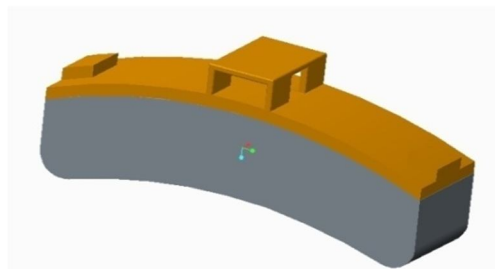


VI. MODEL ANALYSIS

8.1 ANALYSIS OF EXISTING MATERIAL (PHENOLIC):

EQUIVALENT STRESS: PHENOLIC MATERIAL

TOTAL HEAT FLUX: PHENOLIC MATERIAL

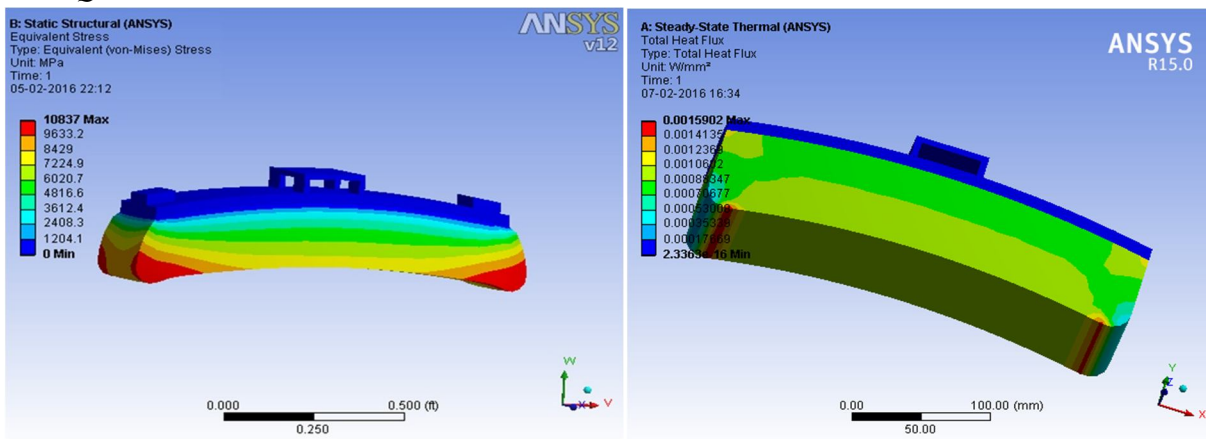

VII. CONCLUSION

After studying different resin properties and various software analysis we come to conclusion that there are too many resin better than phenolic resin such as epoxy, silicon, thermoplastic polyamide, cyanide ester, alkyl benzene.

REFERENCES

[1] Dr. D.S. Deshmukh & Jha Shankar Madanmohan “Design Evaluation and Material Optimization of a Train Brake” in International Journal of Research Studies

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

in Science, Engineering and Technology [IJRSSET] Volume 1, Issue 2, May 2014, PP 45-49.

- [2] Sevel , Nirmal Kannan , Mars Mukesh , “Innovative Electro Magnetic Braking System” International Journal of Innovative Research in Science, Engineering and Technology , An ISO 3297: 2007 Certified Organization , Volume 3, Special Issue 2, April 2014.
- [3] P. Balashanmugam, K.Balasubramaniyan, G.Balasubramaniyan,S.Vinoth , “Fabrication Of High Speed Indication And Automatic Pneumatic Braking System” , International Journal of Engineering Trends and Technology (IJETT) – Volume 5 number 1 – Nov 2013
- [4] M.A.Saibalaji ,Dr. K.Kalaichelvan “Effect Of Alkyl Benzene Modified Resin Matrix In Relation To The Friction Stability In A Non Asbestos Disc Brake Pad” -International Conference On Advances In Engineering, Science And Management March IEEE,2012.
- [5] Min-Soo Kim “Development of the Braking Performance Evaluation Technology for High-speed Brake Dynamometer” International Journal Of Systems Applications, Engineering & Development Issue 1, Volume 6,2012
- [6] Min-soo Kim , “Dynamometer Tests Of Brake Shoes Under Wet Conditions For The High Speed Trains”, International Journal Of Systems Applications, Engineering & Development Issue 2, Volume 5, 2011.
- [7] Hyuncheol Kim And Whoi-Yul Kim “Automated Inspection System For Rolling Stock Brake Shoes” Transactions On Instrumentation And Measurement, IEEE AUGUST 2011
- [8] Shahab Teimourimanesh , Roger Lunden , Tore Vemerssionm “Bracking capacity of railway wheels-state-of-the-art-survey” 16th International Wheelset Congress (IWC16), Cape Town (RSA) March 2010
- [9] .Hongbing Qiao, Bin Gong, “Study Of Safety Monitoring System For Mine Hoisting Machine Brake Shoe” Mechanical Electrical And Information Engineering IEEE .2010
- [10] .Jungwon Hwang1, Hyuncheol Kim “Image Analysis System For Measuring The Thickness Of Train Brakes” Eastern European Conference On The Engineering Of Computer Based Systems, IEEE 2009
- [11] .Anand Prabhakaran “Simplified Representation Of Rigging Efficiency In Brake Force Calculation”, Joint Rail Conference, ASME ,April 4-6, 2006,



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)