



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 2 Issue: VI Month of publication: June 2014

DOI:

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Investigation of Thermal Boundary Layer of non-Newtonian Fluid Past over a Wedge

ManjuBisht¹, Anirudh Gupta²

Department of Mechanical Engineering,

Bipin Tripathi Kumaon Institute of Technology, Dwarahat, 263653, Uttarakhand, India

Abstract—This paper investigates the problem of steady, laminar, two-dimensional boundary layer flow and heat transfer of an incompressible, viscous non-Newtonian fluid over a wedge. A non-Newtonian fluid represented by power law model. Similarity transformation method has been utilized to obtain the ordinary differential equations with associated boundary conditions from the partial differential equations. The transformed coupled ordinary differential equations are solved numerically. Numerical values of local Nusselt number are tabulated. The effects of various parameters on flow and the heat transfer characteristics are discussed numerically and presented graphically. Comparison of present study with the existing limiting solution is shown and examined.

Keywords— Boundary layer; non-Newtonian fluids; Power-law fluids; Wedge; Heat transfer; Nusselt number

I. INTRODUCTION

In recent years, the study of boundary layer flow of non-Newtonian fluid over a wedge has generated considerable interest for its numerous industrial and engineering applications such as the boundary layer along a liquid film, polymer processing and chemical engineering processes. Many fluids such as cosmetics and toiletries, paints, glues, multiphase mixtures, biological fluids and food items are non-Newtonian in nature (Andersson and Irgens [1], Bird et al. [2], Schowalter [3], Irvine and Karni [4], Postelnicu and Pop [5]).

Acrivos [6] examined the behavior of boundary layer flows for non-Newtonian fluids and after that; many related studies have been investigated. Astarita and Marrucci [7] and Bohme [8] proposed the mathematical models of non-Newtonian fluid for both steady and unsteady flows. The steady boundary layer flow of non-Newtonian power law fluid past a moving wedge on a flat plate was analyzed by Ishak et al. [9]. Magyari and Keller [10, 11] considered the problem of the thermal boundary layer of a moving surface. There are different non-Newtonian fluid models available in the literature. The Ostwald-de Waele model, i.e., power-law fluid model is most common type of such models (Bird et al. [2]).

Chen and Chen [12] studied similarity solutions for free convection of non-Newtonian fluids over vertical surfaces in porous media. Gorla and Kumari [13] have investigated non-similar solutions for mixed convection in non-Newtonian fluids along a wedge with variable surface temperature in porous medium. The problem of a steady stretching sheet for power law fluid was studied by Andersson and Dandapat [14], Andersson et al. [15], Hassanien et al. [16], Chamkha [17], and Prasad et al. [18, 19]. Zhang et al. [20] analyzed the characteristics of the thermal boundary layer in Power law fluid flow on continuous moving surface. Moorthy and Senthilvadiu [21] discussed the effect of variable viscosity on free flow of non-Newtonian power law fluids along a vertical surface with thermal stratification. Surati and Timol [22] studied heat transfer in forced convection boundary layer flow of non-Newtonian fluids past a wedge.

This paper investigates the thermal boundary layer of power law fluid flow over a wedge. The numerical results of the resulting coupled ordinary differential equations are obtained using shooting technique under Matlab software. Results were given for velocity and temperature distributions, the coefficient of skin-friction and Nusselt numbers for various values of power law index, wedge parameter and different Prandtl numbers.

INTERNATIONAL JOURNAL FOR RESEARCH IN APPLIED SCIENCE AND ENGINEERING TECHNOLOGY (IJRASET)

II. MATHEMATICAL FORMULATION

Considering a two-dimensional steady, laminar, incompressible fluid obeying the power-law model [2], flowing over a wedge with constant wall temperature, T_w in a stationary coordinate system. The governing equations of boundary layer flow are [23 and 24]

Continuity equation:

$$u \frac{\partial u}{\partial x} + v \frac{\partial v}{\partial y} = 0 \quad (1)$$

Momentum equation:

$$u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} = U \frac{dU}{dx} + \frac{1}{\rho} \frac{\tau_{xy}}{\partial y} \quad (2)$$

Energy Equation:

$$u \frac{\partial T}{\partial x} + v \frac{\partial T}{\partial y} = \alpha \frac{\partial^2 T}{\partial y^2} \quad (3)$$

with the boundary conditions

$$\text{At } y=0: u=v=0 \text{ and } T=T_w,$$

$$\text{At } y \rightarrow \infty: u \rightarrow U(x) = Cx^m \text{ and } T=T_\infty,$$

$$\text{At } x=0: u=U_\infty \text{ and } T=T_\infty, \quad (4)$$

where u and v are the respective velocity components in the x - and y -directions of the fluid flow, ν the kinematic viscosity of the fluid and U the reference velocity at the edge of boundary layer and is a function of x . $m = \frac{\beta}{(2\pi-\beta)}$ is the wedge parameter and β is the wedge angle. ρ is the density of fluid and α is the

thermal diffusivity of the fluid, T the temperature in the vicinity of the wedge.

For power-law fluids the shear stress is defined as demonstrated by [1] and [26]

$$\tau_{xy} = K \left(\frac{\partial u}{\partial y} \right)^n \quad (5)$$

where K is called the consistency coefficient and n is the power-law index n .

Thus, Equation (2) becomes

$$u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} = U \frac{dU}{dx} + \frac{K}{\rho} \frac{\partial}{\partial y} \left(\frac{\partial u}{\partial y} \right)^n \quad (6)$$

The following transformations are utilized to facilitate the solution of the governing equations [24]

$$\psi = \left(\frac{Kx}{\rho} \right)^{\frac{1}{n+1}} [U(x)]^{\frac{(2n-1)}{n+1}} f(\eta) \quad (7)$$

$$\eta = [\rho U(x)^{(2-n)} / Kx]^{\frac{1}{n+1}} y \quad (8)$$

$$\theta = \frac{T-T_\infty}{T_w-T_\infty} \quad (9)$$

where η is the similarity variable and $f(\eta)$ and $\theta(\eta)$ are similarity dependent variables.

Now Equation (1) is satisfied automatically. Substituting Equations (7-9) into momentum equation (6) and energy

INTERNATIONAL JOURNAL FOR RESEARCH IN APPLIED SCIENCE AND ENGINEERING TECHNOLOGY (IJRASET)

equation (3) lead to the following ordinary differential equations:

$$f''' + \frac{2mn-m+1}{n(n+1)} f (f'')^{(2-n)} + \frac{m}{n} (1-f'^2)(f'')^{(1-n)} = 0 \quad (10)$$

$$\theta'' + \lambda f Pr R \theta' = 0 \quad (11)$$

where $\lambda = \frac{2mn-m+1}{n+1}$, $R = \frac{Re}{Re_{(n,x)}^{2/(n+1)}}$, $Re_{(n,x)} = \frac{x^n U^{2-n}}{\nu}$ is the generalized Reynolds number for non-Newtonian fluids and $Re = \frac{xU}{\nu}$ and $Pr = \frac{\rho v C_P}{k}$ are Reynolds number and Prandtl number, respectively.

The associated boundary conditions are:

$$\text{At } \eta = 0: f = 0, f' = 0, \theta = 1$$

$$\text{At } \eta \rightarrow \infty: f' = 1, \theta = 0 \quad (12)$$

where primes denote differentiation with respect to η .

For Newtonian fluid, index of power law fluid $n=1$ and $m=0$, Equation (11) reduces to

$$\theta'' + \frac{1}{2} Pr (m+1) f \theta' = 0 \quad (13)$$

The important physical quantity of interest is the Nusselt number which can be defined as

$$Nu_x = \frac{q_w x}{(T_0 - T_x)k} = -\theta'(0) Re_{(x,n)}^{\frac{1}{n+1}} \quad (14)$$

III. RESULTS AND DISCUSSION

All Numerical Numerical results are obtained to study the effect of the various values of the R, wedge parameter m, power law index n and Prandtl number Pr on dimensionless temperature and rate of heat transfer. Our present results have also been compared for Newtonian fluid ($n = 1$) with those of Bejan [27]. The comparison results are given in Table I. The numerical results for $-\theta'(0)$ are tabulated in Tables II-IV.

The temperature profiles are displayed in Figure 1-4 for prescribed values of m, n, Pr and R. We see that the temperature profiles decreases as the R, Pr and m increases but with the increase in n the temperature profiles are increases. Figure 5-7 depict the effects of the Prandtl number Pr, wedge parameter m and power law index n on Nusselt number. As Pr and m increases, the Nusselt number increase for a given n and it decreases as n increases.


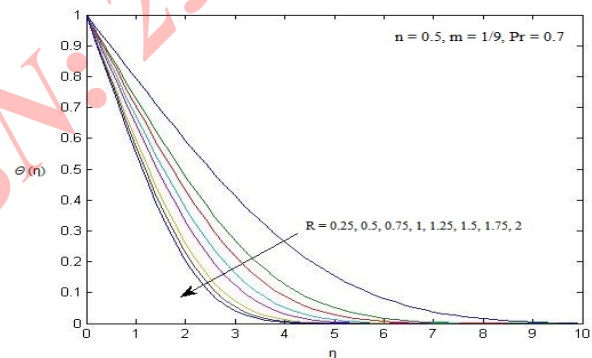


Figure 1. Temperature profiles for different values of R when $n = 0.5$, $m = 1/9$ and $Pr = 0.7$

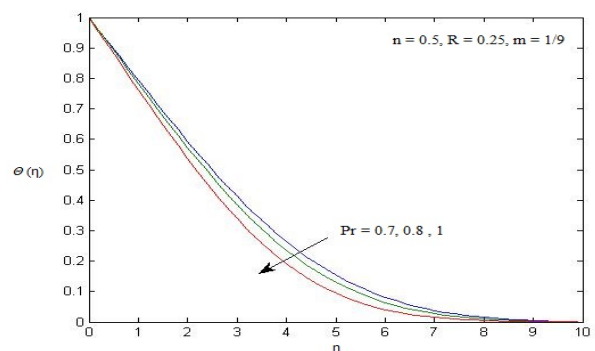

INTERNATIONAL JOURNAL FOR RESEARCH IN APPLIED SCIENCE AND ENGINEERING TECHNOLOGY (IJRASET)

Figure 2. Temperature profiles for different values of Pr

when $n = 0.5$, $m = 1/9$ and $R = 0.25$

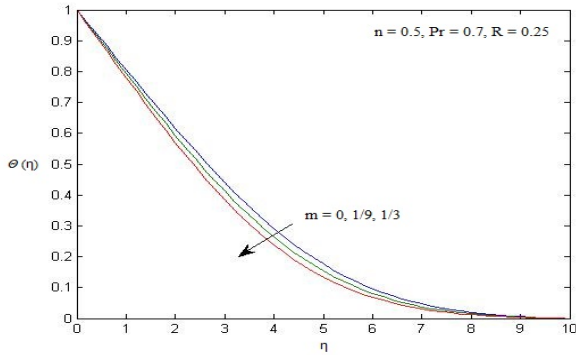


Figure 3. Temperature profiles for different values of m

when $n = 0.5$, $Pr = 0.7$ and $R = 0.25$

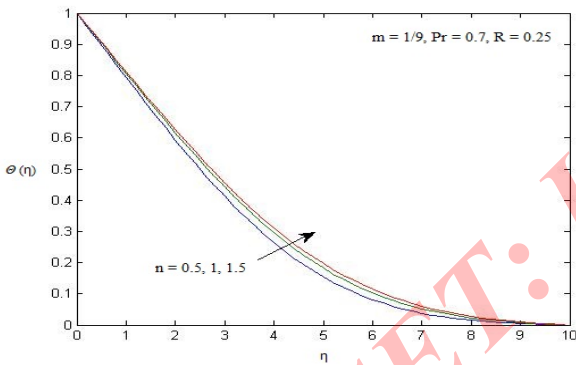


Figure 4. Temperature profiles for different values of n

when $m = 1/9$, $Pr = 0.7$ and $R = 0.25$

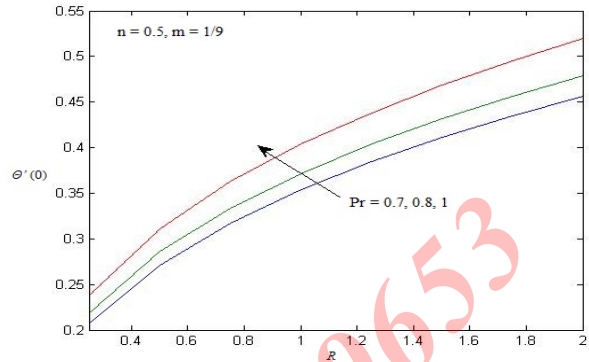


Figure 5. Variation of Local Nusselt number for different values of Pr

when $n = 0.5$ and $m = 1/9$

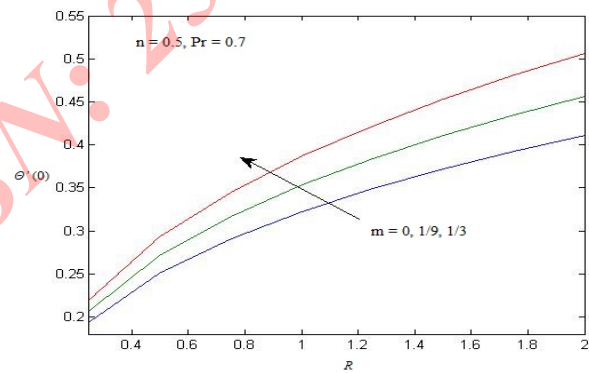


Figure 6. Variation of Local Nusselt number for different values of m

when $n = 0.5$ and $Pr = 0.7$

INTERNATIONAL JOURNAL FOR RESEARCH IN APPLIED SCIENCE AND ENGINEERING TECHNOLOGY (IJRASET)

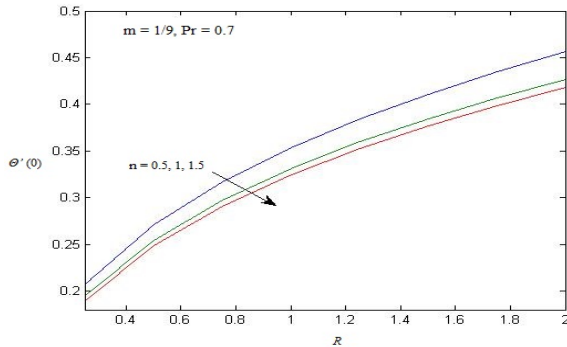


Figure 7. Variation of Local Nusselt number for different values of n

when $m = 1/9$ and $Pr = 0.7$

R	$-\theta'(0)$		
	Pr = 0.7	Pr = 0.8	Pr = 1.0
0.25	0.2071	0.2182	0.2382
0.5	0.2716	0.2860	0.3114
0.75	0.3173	0.3337	0.3628
1.0	0.3536	0.3717	0.4037
1.25	0.3843	0.4037	0.4381
1.5	0.4110	0.4316	0.4682
1.75	0.4349	0.4566	0.4950
2.0	0.4566	0.4793	0.5194

TABLE IV. VALUES OF $-\theta'(0)$ FOR $m = 1/9$ AND $Pr = 0.7$

Table I. Comparison of the results of $-\theta'(0)$ for various values of wedge parameter m and Prandtl number Pr when $n = 1$ and $R = 1$

R	$-\theta'(0)$		
	n = 0.5	n = 1	n = 1.5
0.25	0.2071	0.2182	0.2382
0.5	0.2716	0.2860	0.3114
0.75	0.3173	0.3337	0.3628
1.0	0.3536	0.3717	0.4037
1.25	0.3843	0.4037	0.4381
1.5	0.4110	0.4316	0.4682
1.75	0.4349	0.4566	0.4950
2.0	0.4566	0.4793	0.5194

Table II. Values of $-\theta'(0)$ for different values of wedge parameter m and R when $n = 0.5$ and $Pr = 0.7$

R	$-\theta'(0)$		
	m = 0	m = 1/9	m = 1/3
0.25	0.1942	0.2071	0.2205
0.5	0.2511	0.2716	0.2933
0.75	0.2910	0.3173	0.3453
1.0	0.3226	0.3536	0.3870
1.25	0.3491	0.3843	0.4223
1.5	0.3722	0.4110	0.4532
1.75	0.3928	0.4349	0.4809
2.0	0.4115	0.4566	0.5061

Table III. Values of $-\theta'(0)$ for different values of Pr when $n = 0.5$ and $m = 1/9$

m	$-\theta'(0)$					
	Pr = 0.7		Pr = 0.8		Pr = 1.0	
	Present results	Bejan [27]	Present results	Bejan [27]	Present results	Bejan [27]
0	0.2927	0.292	0.3069	0.307	0.3320	0.332
1/9	0.3312	0.331	0.3480	0.348	0.3778	0.378
1/3	0.3841	0.384	0.4043	0.403	0.4400	0.440
0.25	0.2071		0.1946		0.1895	
0.5	0.2716		0.2547		0.2486	
0.75	0.3173		0.2973		0.2908	
1.0	0.3536		0.3312		0.3243	
1.25	0.3843		0.3597		0.3524	
1.5	0.4110		0.3845		0.3769	
1.75	0.4349		0.4067		0.3987	
2.0	0.4566		0.4268		0.4185	

IV. CONCLUSIONS

In this paper, we have presented a thermal analysis of non-Newtonian fluids over a wedge. Numerical solutions using Runge-Kutta method with shooting technique were obtained

INTERNATIONAL JOURNAL FOR RESEARCH IN APPLIED SCIENCE AND ENGINEERING TECHNOLOGY (IJRASET)

for the temperature fields for several values of the wedge parameter m , Prandlt number Pr for temperature variation and power law index n . The main findings of the present analysis are as follows:

- As the wedge angle increases, the dimensionless temperature decreases and Nusselt number increases.
- The ratio of Reynolds number to the generalized Reynolds number leads to decrease the dimensionless temperature, while the rate of heat transfer at the wall increases.
- With increase in Prandtl number, the heat transfer rate increases and the dimensionless temperature decreases for both Newtonian and non-Newtonian fluids.
- Increase in power law index leads to increase of the dimensionless temperature and decrease of the heat transfer rate.

NOMENCLATURE

u	fluid velocity component along x- direction within boundary layer
v	fluid velocity component along y-direction within boundary layer
$U(x)$	free stream velocity
m	wedge parameter
n	index of power law fluid
dp/dx	pressure gradient in x-direction
$Re_{(x,n)}$	generalized Reynolds number
C_{fx}	generalized local skin friction coefficient
$C(n)$	generalized shear stress coefficient
L	characteristic length
f	dimensionless stream function
ψ	stream function

η	stretching function
τ_{xy}	shear stress
K	consistency coefficient
ρ	density of the fluid
β	wedge angle
τ_w	wall shear stress

Subscripts

w	wall conditions
-----	-----------------

REFERENCES

- [1] H.I.Andersson, and F. Irgens, *Film flow of power law fluids*. in: N.P. Cheremissionoff (Ed.), *Encyclopedia of Fluid Mechanics*, vol. 9, Gulf Publishing Company, Texas, vol. 9,pp. 617–648,1990.
- [2] R. B. Bird, R. C. Armstrong, and O. Hassager, *Dynamics of Polymeric Liquids*, Fluid Mechanics, second ed., Wiley, New York, vol. 1, 1987.
- [3] W.R. Schowalter, “The application of boundary layer theory to power-law pseudoplastic fluid: similar solutions”, *AIChE Journal*, vol. 6, pp. 24-28,1960.
- [4] T. F. Irvine, and J. Karni, *Non-Newtonian fluid flow and heat transfer*, Chapter 20 in *Handbook of Single Phase Convective Heat Transfer* (Ed. S. Kakac, R. K. Shah, and Aung, W.), vol. 20, no. 1, pp. 20-57, 1987.
- [5] A. Postelnicu, and I. Pop, “Falkner–Skan boundary layer flow of a power-law fluid past a stretching wedge”, *Applied Mathematics and Computation*, vol. 217, pp. 4359–4368, 2011.
- [6] A. Acrivos, “A theoretical analysis of laminar natural convection heat transfer to non-Newtonian fluid”, *American Institute of Chemical Engineers Journal*, vol. 6, pp. 584–590, 1960.
- [7] G. Astarita, and G. Marrucci, *Principles of Non-Newtonian Fluid Mechanics*, McGraw-Hill, New York, 1974.

INTERNATIONAL JOURNAL FOR RESEARCH IN APPLIED SCIENCE AND ENGINEERING TECHNOLOGY (IJRASET)

- [8] H. Bohme, *Non-Newtonian Fluid Mechanics*, North-Holland Series in Applied Mathematics and Mechanics, 1987.
- [9] A. Ishak, R. Nazar, and I. Pop, "Moving wedge and flat plate in a power-law fluid", *International Journal of Non-Linear Mechanics*, vol. 46, pp. 1017-1021, 2011.
- [10] E. Magyari and B. Keller, "Heat and mass transfer in the boundary layers on an exponentially stretching continuous surface", *Journal of Physics D: Applied Physics*, vol. 32, pp. 577-585, 1999.
- [11] E. Magyari and B. Keller, "Heat transfer characteristics of the separation boundary flow induced by a continuous stretching surface", *Journal of Physics D: Applied Physics*, vol. 32, pp. 2876-2881, 1999.
- [12] H. T. Chen and C. K. Chen, "Free convection of non-Newtonian fluids along a vertical plate embedded in a porous medium", *Transactions of ASME, Journal of Heat Transfer*, vol. 110, pp. 257-260, 1988.
- [13] R. S. R. Gorla and M. Kumari, "Nonsimilar solutions for mixed convection in non-Newtonian fluids along a wedge with variable surface temperature in a porous medium", *International Journal of Numerical Methods for Heat & Fluid Flow*, vol. 9, no. 5, pp. 601-611, 1999.
- [14] H. I. Andersson and B. S. Dandapat, "Flow of a power-law fluid over a stretching sheet", *Stability Appl. Anal. Continuous Media*, vol. 1, pp. 339-347, 1991.
- [15] H. I. Andersson, J. B. Aarseth, N. Braud, and B. S. Dandapat, "Flow of a power-law fluid film on an unsteady stretching surface", *Journal of Non-Newtonian Fluid Mechanics*, vol. 62, pp. 1-8, 1996.
- [16] I. A. Hassanien, A. A. Abdullah, and R. S. R. Gorla, "Flow and heat transfer in a power-law fluid over a non-isothermal stretching sheet", *Mathematical and Computer Modeling*, vol. 28, pp. 105-116, 1998.
- [17] A. J. Chamkha, "Similarity solution for thermal boundary layer on a stretched surface of a non-Newtonian fluid", *International Communications in Heat and Mass Transfer*, vol. 24, pp. 643-652, 1977.
- [18] K. V. Prasad, D. Palani, P. S. Datti, "MHD power-law fluid flow and heat transfer over a non-isothermal stretching sheet", *Communications in Nonlinear Science Numerical Simulations*, vol. 14, pp. 2178-2189, 2009.
- [19] K. V. Prasad, P. S. Datti and B. T. Raju, "Momentum and heat transfer of a non-Newtonian Eyring-Powell Fluid over a Non-isothermal stretching sheet", *International Journal of Mathematical Archive*, vol. 4, no. 1, pp. 230-241, 2013.
- [20] H. Zhang, X. Zhang and L. Zheng, "An analysis of the characteristics of the thermal boundary layer in power law fluid", *Journal of Thermal Sciences*, vol. 17, no. (3), pp. 233-237, 2008.
- [21] M. B. K. Moorthy and K. Senthilvadivu, "Effect of variable viscosity on free flow of non-Newtonian power-law fluids along a vertical surface with thermal stratification", *Archives of Thermodynamics*, vol. 33, pp. 109-121, 2012.
- [22] H. C. Suratind and M. G. Timol, "Numerical Study Of Forced Convection Wedge Flow Of Some Non-Newtonian Fluids", *International Journal of Applied Mathematics and Mechanics*, vol. 6, no. 18, pp. 50-65, 2010.
- [23] M. S. Abel, P. G. Siddheshwar and N. Mahesha, "Effect of thermal buoyancy and variable thermal conductivity on the MHD flow and heat transfer in a power-law fluid past a vertical stretching sheet in the presence of a non-uniform heat source", *International Journal of Non-Linear Mechanics*, vol. 44, pp. 1-12, 2009.
- [24] T. R. Mahapatra, S. K. Nandy and A. S. Gupta, "Magnetohydrodynamic stagnation-point flow of a power-law fluid towards a stretching surface", *International Journal of Non-Linear Mechanics*, vol. 44, pp. 124-129, 2009.
- [25] W. L. Wilkinson, *Non-Newtonian Fluids*. Pergamon Press, London, 1960.
- [26] A. Bejan, *Convection Heat Transfer*, Third Edition. Wiley, 2009.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)