



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 5

Issue: 1

Month of publication: January 2017

DOI:

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

**International Journal for Research in Applied Science & Engineering
Technology (IJRASET)**

Assessment of Water Quality Index of Shahpura Lake Bhopal and It's Restoration

Dharmanshu Dixit¹, D.C. Rahi²

*1*Student, Department Of Civil Engineering, Jabalpur Engineering College, M.P, India

*2*Assistant Professor, Department Of Civil Engineering, Jabalpur Engineering College, M.P, India

Abstract: *The water of Shahpura Lake is suffering from severe contamination which is due to heavy discharge of pollutants without adequate treatment to remove harmful compounds. This is leading to the damaging effects not only to the individual species and population but also to natural biological community. The present work highlights the water quality index of Shahpura Lake of Bhopal. Water Quality Index (WQI) using water quality parameters like Temperature, Chloride, Hardness, Alkalinity and pH, Conductivity, Total Dissolved Solids (TDS), Fluoride, Iron, Turbidity, Dissolved Oxygen (DO) and Biochemical Oxygen Demand (BOD). The analysis reveals that Shahpura Lake needs some treatment before consumption.*

Key words: *Physico-Chemical parameters, water quality Index, Remedies and Restoration.*

I. INTRODUCTION

Globally, there is increasing awareness that the water will be one of the most critical natural resources in future. Water scarcity is increasing worldwide and pressure on the existing water resources is increasing due to growing demand of different sectors such as domestic, agriculture and industrial, hydropower etc. Therefore evaluation of water quality is important research topic in the recent years. Water is one of the most important factor for every living organism on this planet. Water is generally used for drinking, fisheries and other domestic purposes in this area. The available fresh water to man is hardly 0.3 to 0.5% of the total water available on the earth and therefore its judicious use in imperative. Lakes are one of the important water resources used for irrigation, drinking, fisheries and flood control purposes.

The Shahpura Lake is situated near Manisha Market region of Bhopal. It is surrounded by hospitals, schools and most importantly the population living around the lake area. The lake shows the marshy vegetation growing at the bank of the lake along with drains and pools that quantify pollution cost by municipal and industrial waste. A large part of this contamination is due to the organic material that comes from neighbouring urban sewage, live stocks, industrial waste and hospital waste. The water is also infested with water hyacinth which stabilized the water quality and provides substantial support to bacterial density which in turn contributes significantly to its growth and nutrient dynamics. Water quality indices are tools to determine conditions of water quality and, like any other tool require knowledge about principles and basic concepts of water and related issues. It is a well-known method of expressing water quality that offers a stable and reproducible unit of measure which responds to changes in the principal characteristics of water. WQI is a mechanism for presenting a cumulatively derived numerical expression defining a certain level of water quality. In other words, WQI summarizes large amounts of water quality data into simple terms e.g., excellent, good, bad, etc. for reporting to management and the public in a consistent manner.

Most lake pollution problems are caused by nutrients, contaminants, and sediments carried into the lakes. Soil particles carry more than 90 percent of the organic nitrogen and phosphorus originating from upland agricultural practices High concentrations of nitrogen and phosphorus are the main causes of algal growth, which results in the deterioration of the lake water quality. Algae have a very high growth potential, many times more than any land-based plant system, and respond quickly to nutrient inputs which act as fertilizers.

II. STUDY AREA AND SAMPLING DETAILS

Shahpura Lake is one of the important lake of Bhopal, Madhya Pradesh. and its coordinates are 23°12'17"N and 77°25'35"E. Water samples collected from eight sampling stations selected for the analysis are Rishabhdev Park as S1, Near Bansal Hospital as S2, Near Apna collection as S3, Mamta marriage garden as S4, near Kolar road as S5, Near Windsor Temple as S6, Near chitransh nursery as S7 and Manisha market Road as S8. Samples are collected in the month of August. Samples for analysis are collected in sterilized bottles using the standard procedure for grab (or) catch samples in accordance with standard methods of APHA (American Public Health Association). The analysis of various physico – chemical parameters namely Temperature, Chloride, Hardness, Alkalinity,

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

pH, Conductivity, Total Dissolved Solids (TDS), Fluoride, Iron, Turbidity, Dissolved Oxygen (DO) and Biochemical Oxygen Demand (BOD) are carried out. All the chemicals and reagents used were of analytical grade.

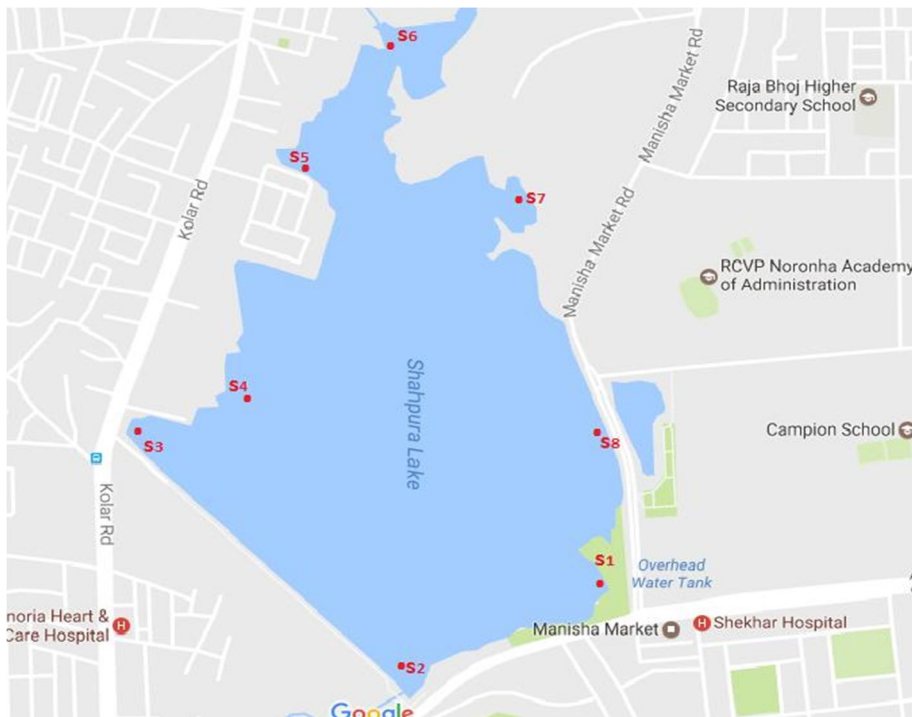


Fig1. Study Area and Sampling Details

III. PARAMETERS CALCULATED

A. Temperature

Water temperature is a physical property expressing how hot or cold water is. Temperature is an important factor to consider when assessing water quality. In addition to its own effects, temperature influences several other parameters and can alter the physical and chemical properties of water. The average temperature of the present study ranged is 34.6.

B. Chloride

Chloride is present in all natural waters, but mostly the concentrations are low. In most surface streams, chloride concentrations are lower than those of sulphate or bicarbonate. Chloride ions may be retained in solution through most of the processes which tend to separate out other ions. Chloride values obtained in the study are found in the range between 70.8 to 72.7 mg / lt.

C. Hardness

Calcium and magnesium dissolved in water are the two most common minerals that make water "hard." The hardness of water is referred to by three types of measurements: grains per gallon, milligrams per liter (mg/L), or parts per million (ppm). The hardness values of the present study were found to range between 292 to 298 mg/lit.

D. Alkalinity

Alkalinity is a measure of the capacity of water to neutralize acids. The predominant chemical system present in natural waters is one where carbonates, bicarbonates and hydroxides are present. The bicarbonate ion is usually prevalent. In the present investigation the total alkalinity of the water samples is found in the Range 364 to 376 mg/lt.

E. Ph

pH is a measure of how acidic/basic water is. The range goes from 0 - 14, with 7 being neutral. pHs of less than 7 indicate acidity,

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

whereas a pH of greater than 7 indicates a base. pH is really a measure of the relative amount of free hydrogen and hydroxyl ions in the water. The pH values of the present investigation were between 7.2 to 7.9.

F. Conductivity

Conductivity is used to measure the concentration of dissolved solids which have been ionized in a polar solution such as water. The unit of measurement commonly used is one millionth of a Siemen per centimetre (micro-Siemens per centimetre or $\mu\text{S}/\text{cm}$). The values obtained are in the range 1178 to 1201 mhos

G. Total dissolved solids

Total dissolved solids (TDS) comprise inorganic salts (principally calcium, magnesium, potassium, sodium, bicarbonates, chlorides, and sulfates) and some small amounts of organic matter that are dissolved in water. TDS values ranged within 678 to 701 mg/l.

H. Turbidity

Turbidity is the cloudiness or haziness of a fluid caused by suspended solids that are usually invisible to the naked eye. It is an aggregate optical property of the water and does not identify individual substances; it just says something is there. It is an aggregate optical property of the water and does not identify individual substances; it just says something is there.

I. Fluoride

Fluoride is the simplest anion of fluorine. Its salts and minerals are important chemical reagent. In terms of charge and size, the fluoride ion resembles the hydroxide ion. Fluoride ions occur on earth in several minerals, particularly fluorite, but are only present in trace quantities in water. Fluoride contributes a distinctive bitter taste. It contributes no color to fluoride salts. In study it varies in the range of 0.49 to 1.09 mg/l.

J. Iron



In present study it is found in the range 0.25 to 0.44 mg/l.

K. Dissolved oxygen









Dissolved oxygen concentrations are constantly affected by diffusion and aeration, photosynthesis, respiration and decomposition. While water equilibrates toward 100% air saturation. The DO values obtained in the present study are within 5.3 to 6.2 mg/L.

L. Biochemical oxygen demand


Biochemical oxygen demand (BOD) is the amount of dissolved oxygen needed (i. e., demanded) by aerobic biological organisms to break down organic material present in a given water sample at certain temperature over a specific time period. This parameter values obtained in the present study are within 194 to 205 mg/l.

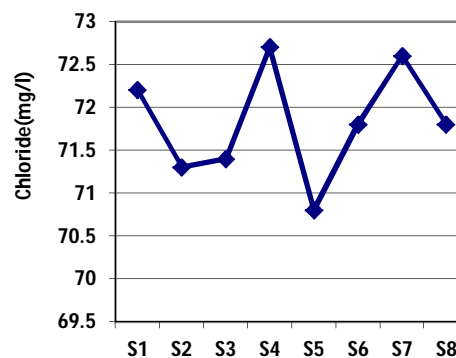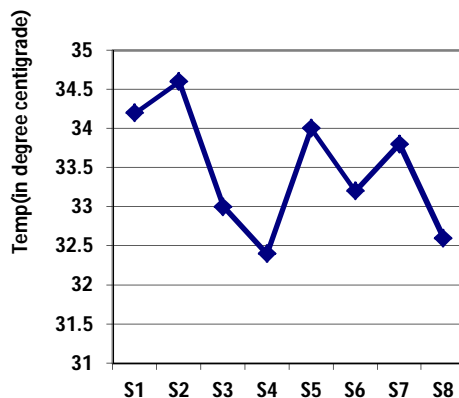

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

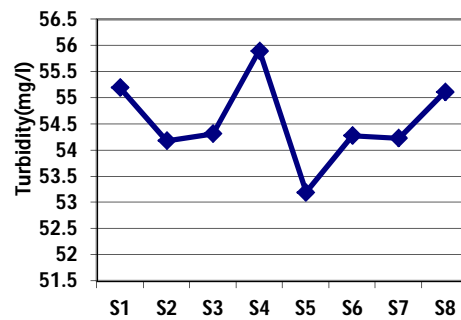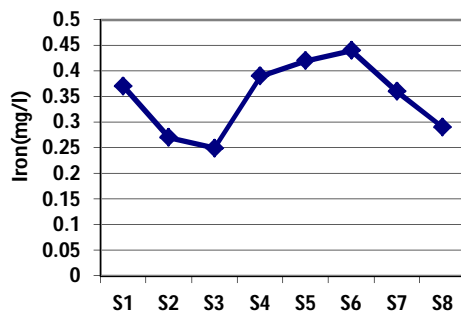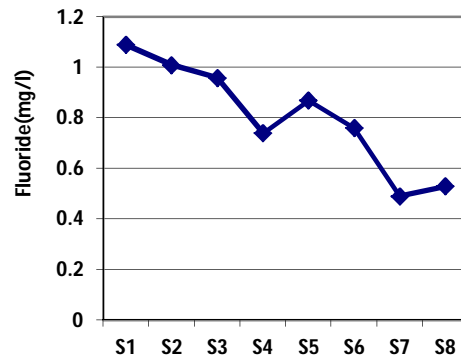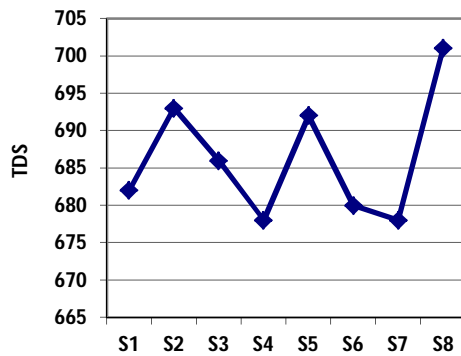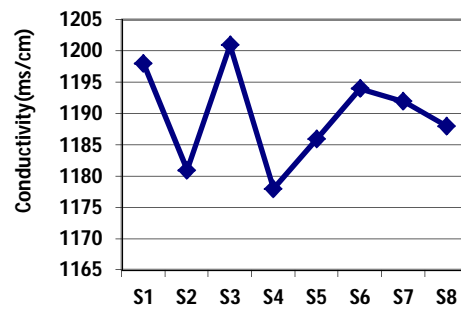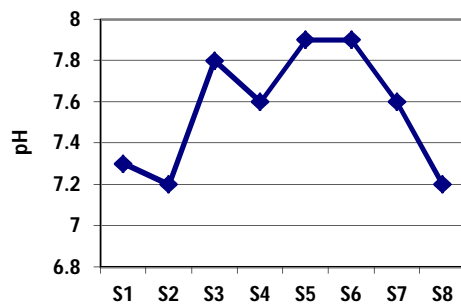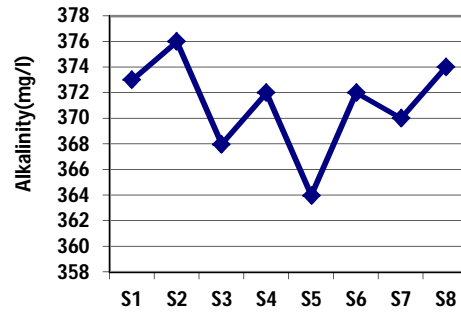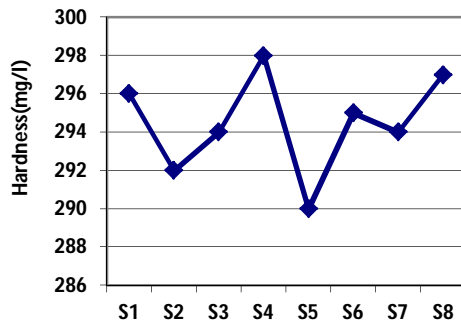

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

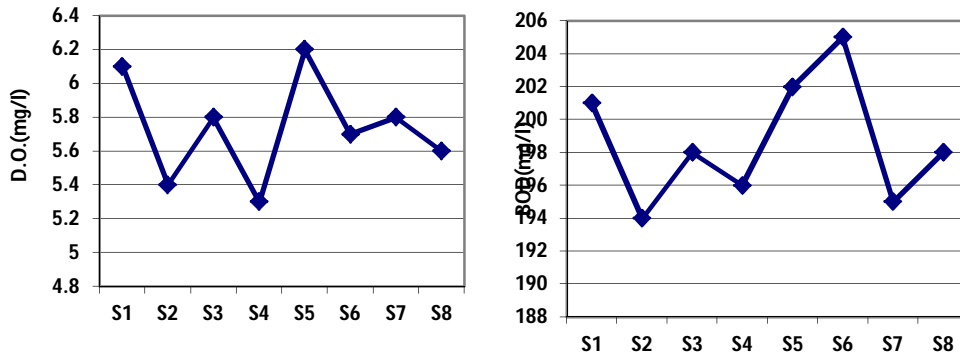

IV. CALCULATION OF WQI

In this study for the calculation of water quality index twelve important parameters were chosen. The W.Q.I. has been calculated by using the standards of drinking water quality recommended by the World Health Organization (WHO), Bureau of Indian Standards (BIS) and Indian Council for Medical Research (ICMR). The weighted arithmetic index method (Brown et. al.) has been used for the calculation of WQI of the lake. Further quality rating or sub index (qn) was calculated using the following expression.

$$\text{Quality rating, } Q_i = 100 [(V_n - V_i) / (V_s - V_i)]$$

Where,

V_n : actual amount of nth parameter

V_i : the ideal value of this parameter

$$V_i = 0,$$

Except for pH and D.O. $V_i = 7.0$ for pH;

$V_i = 14.6$ mg/L for D.O.

V_s : recommended WHO standard of corresponding parameter

Relative weight (W_i) was calculated by a value inversely proportional to the recommended standard (S_i) of the corresponding parameter: $W_i = 1 / S_i$ Generally, WQI are discussed for a specific and intended use of water. In this study the WQI for human consumption is considered and permissible WQI for the drinking water is taken as 100. The overall WQI was calculated by using Equation:

$$\text{Water Quality Index (WQI)} = \Sigma (Q_i) W_i / \Sigma W_i$$

TABLE I WATER QUALITY CLASSIFICATION BASED ON WQI VALUE

WQI	Quality of water
00-24	EXCELLENT
25-49	GOOD
50-74	POOR
75-100	VERY POOR
>100	UNFIT FOR DRINKING

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

ESULT TABLE 2 SAMPLES CALCULATION

Parameter	Mean test result (august month)	Unit	Standard permissible value(Si)	Relative Weight (Wi)
Temperature	33.5	oC	-	-
Chloride	71.8	(mg/L)	250	0.0040
Hardness	294	(mg/L)	300	0.0033
Alkalinity	371	(mg/L)	200	0.0050
pH	7.5	-	8.5	0.1176
Conductivity	1189	(mS/cm)	300	0.0033
TDS	686	(mg/L)	500	0.0020
Fluoride	0.81	(mg/L)	1	0.0040
Iron	0.35	(mg/L)	0.3	1.6666
Turbidity	54.56	(mg/L)	5	0.16533
DO	5.7	(mg/L)	5	0.2000
BOD	198	(mg/L)	6	0.1667

V. LAKE RESTORATION METHODS

The various lake restoration methods can be considered under two broad categories:

Preventive or indirect methods, and Ameliorative or direct methods.

The preventive methods are basically the ones which identify the pollutants, reduce their rate of generation, and/or prevent them from reaching the lake. The ameliorative methods involve either the treatment of the wastes before discharge into the lake (outside-lake methods) or direct intervention in the lake (in-lake methods).

VI. CONCLUSION

On the basis of results of research civil engineering structure which control the pollution in lake. To control the pollution in lake through major sewers by Intercept and treat all sewage at Intersection of lake by volume. Divert some and Intercept the others. Treat remaining sewage at intersection of lake. Install sewage treatment network upstream at sources and Intercept for final Treatment at Lake. And to control pollution in lake through minor drains by Connect to main sewers as per gradient or lift stations. Cluster drains in pockets and treat before discharge into lake. Connect Drains to points and lift stations for treatment nearby.

REFERENCES

- [1] Bajpai A., Study of nutrient enrichment through catchment area with reference to Upper lake, Bhopal. PhD .Thesis, Barkatullah University, Bhopal(1994).

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

- [2] Bhaven N. Tandel, Dr. JEM Macwan, and Chirag K. Soni. Assessment of Water Quality Index of Small Lake in South Gujarat Region, India
- [3] F.J. Thakor, D.K. Bho, H.R. Dabh, S.N. Pandya and Nikitraj B. Chauhan. Water Quality Index (W.Q.I.) of Pariyej Lake Dist. Kheda – Gujarat. CurrentWorld Environment Vol. 6(2), 225-231 (2011)
- [4] Ground water in Koilwar block of Bhojpur (Bihar). Neerja Kalra et al J. Chem. Pharm. Res., 2012, 4(3):1783
- [5] Er. Srikanth Satish Kumar Darapu, Er. B. Sudhakar, Dr. K. Siva Rama Krishna, Dr. P. Vasudeva Rao Dr. M. Chandra Sekhar. Determining Water Quality Index for the Evaluation of Water Quality of River Godavari. ISSN: 2248-9622 Vol. 1, Issue 2, pp.174-182
- [6] APHA Standard methods for examination of water and waste water. 21st Edn. Washington D.C. (2005).
- [7] BIS Analysis of water and waste water Bureau of Indian Standards, New Delhi (1993).
- [8] BIS Standards of water for drinking and other purposes Bureau of Indian Standards, New Delhi. (1993).
- [9] Gupta B. K. and G. Singh. Damodar river water quality status along Dugda – Sindri industrial belt of Jharia coalfield, in: Pollution and Biomonitoring of Indian Rivers, ABD Publication, JMaipur, 58 – 69 (2000)
- [10] WHO. International Standards for Drinking Water. World Health Organization, Geneva, Switzerland (1992)
- [11] BIS (Bureau of Indian Standards) 10500, Indian standard drinking water specification First revision, 1991, pp 1-8sss
- [12] Joyanta pal, Dr. Manish Pal, Dr.Pankaj Kr. Roy and Dr. Ashish Mazumdar. Water Quality Index for Assessment of Rudrasagar Lake Ecosystem, India. January 2016, pp.98-101



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)