



# IJRASET

International Journal For Research in  
Applied Science and Engineering Technology



---

# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 5**

**Issue: V**

**Month of publication: May 2017**

**DOI:**

[www.ijraset.com](http://www.ijraset.com)

Call:  08813907089

E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)

# A Research on the Recycling of Glass Fibre Strengthened Concrete Wastes

Muhammet Enes Akpınar<sup>1</sup>, Mehmet Ali Ustuner<sup>2</sup>, Sadik Alper Yildizel<sup>3</sup>, Muhammet Ensar Yigit<sup>3</sup>

<sup>1</sup>Industrial Engineering, Manisa Celal Bayar University

<sup>2</sup>Electrical&Electronic Engineering, Manisa Celal Bayar University

<sup>3</sup>Civil Engineering, Manisa Celal Bayar University

**Abstract:** Glass fibre strengthened concrete wastes have been considered difficult to recycle due to its quick hardening nature which cannot be reshaped in a short time following spraying process. Most of the wastes are landfilled and this process causes unfavorable environmental effects, including water pollution. In this study, waste grc particles were granulated and used as filling material in original grc mix design. With the addition of nano calcium carbonate particles at the rate of 2.5%, 5% and 7.5%, recycling would convert this waste material into a beneficial and sustainable material. Moreover, water pollution is prevented due to lack of landfilling and waste preserving processes. Bending test results were realized according to the EN 1170-5 standard and results show that there is a strong potential of using recycled glass fibre strengthened concrete recycled particles as filling with nano calcium carbonate particles.

**Keyword:** Glass fibre strengthened concrete, mix design, and nano calcium carbonate

## I. INTRODUCTION

Recycling process of glass fibre is an environmental problem due to the fact that its insolubility property in the nature and high cost of recycling processes [1]. In addition glass fibre wastes are rarely preferred for concrete producers for requiring additional chemicals and polymers. This fact limits the usage of them. In concrete technology, there are several methods to use them as cement replacement and filler materials [2-8].

The usage of recycled glass fibre as an ingredient in concrete mixes causes various environmental benefits. This usage which depends on many techniques limits the production of raw materials and the harmful emulsions as CO<sub>2</sub>.

In many researches, nano glass particles were used as cement and aggregate replacement materials. Applying finer particles enhances the mechanical behaviour of the matrix materials [9-14].

Within the scope of this research, grinded glass fibres with the addition of nano calcium carbonates were used as filler material in the mix design of glass fibre reinforced concrete.

## II. METHODOLOGY AND APPLICATION

CEM I 52.5 R (White Portland Cement) which complies with the TS EN 197-1 and ASTM C150 standards was preferred for the cement applications. The chemical and physical properties of CEM I 52.5 R cement are shown in Table I.

TABLE I THE CHEMICAL AND PHYSICAL PROPERTIES OF CEM I 52.5 R CEMENT.

Chemical Properties (%)		Physical and Mechanical Properties	
SiO <sub>2</sub>	21.6	Specific Weight	3.06
Al <sub>2</sub> O <sub>3</sub>	4.05	Specific Surface (cm <sup>2</sup> /gr)	4600
Fe <sub>2</sub> O <sub>3</sub>	0.26	Whiteness (%)	85.5
CaO	65.7	Initial Setting (min.)	100
MgO	1.30	Final Setting (min.)	130
Na <sub>2</sub> O	0.30	Water Used for Consistency (%)	30
K <sub>2</sub> O	0.35	Volume Constancy (mm)	1.0
SO <sub>3</sub>	3.30	Remnants Obtained Using 0.045 Sieve (%)	1.0
Free CaO	1.60	Remnants Obtained Using 0.090 Sieve (%)	0.1
Chloride (Cl)	0.01	Compressive Strength for 2 days (MPa)	37.0
Insoluble	0.18	Compressive Strength for 7 days (MPa)	50.0
Loss on Ignition	3.20	Compressive Strength for 28 days (MPa)	60.0

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

Polycarboxylate based third generation water reducer was used as the chemical agent. Silica sand was chosen as the original aggregate to be used in the mixtures. Properties of the silica sand are given in Table II.

TABLE III  
PHYSICAL PROPERTIES OF THE AGGREGATE USED IN THE MIXTURES

Sieve Aperture Size	1 mm	710 μm	500 μm	355 μm	250 μm	180 μm	125 μm	90 μm	63 μm
Production Range (%)	0	0	0	0.2	0.3	20.1	60.4	16.1	1.8
Mean Grain Size (μm)	140-170			Specific Weight		2.68			
Clay Content (%)	0.6-0.8			AFS Value (%)		84.6			

Waste glass fibres were grinded with the aid of a grinder (up to 10 mm size) and added the original concrete mixes at the rates of 2.5 %, 5 % and 7.5 %. Apart from this process, nano calcium carbonate was also added to the mixes as a cement replacement materials at the rates of 2.5 % and 5 % in parallel with the literature researches. 28 day bending test results were compared to the original mix parameters. Mix designs are presented in Table III.

TABLE IIIII DESIGN MIXES CONTENT

Design Description	Mix Content
Org-Mix	Original Mix Content
Mix A	Recycled Fiber 7.5 % + Calcium Carbonate 2.5 %
Mix B	Recycled Fiber 5 % + Calcium Carbonate 2.5 %
Mix C	Recycled Fiber 2.5 % + Calcium Carbonate 2.5 %
Mix D	Recycled Fiber 7.5 % + Calcium Carbonate 5 %
Mix E	Recycled Fiber 5 % + Calcium Carbonate 5 %
Mix F	Recycled Fiber 2.5 % + Calcium Carbonate 5 %

Bending test were conducted as per the TS EN 1170-5 standard and with the aid of bending machines. Test results are seen in Figure 1.

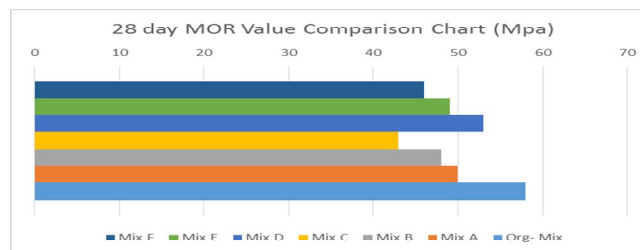


Fig. 1 MOR value comparison Chart (Mpa)

### III.CONCLUSIONS

Test results showed that the mix with the addition of 7.5 % recycled fibre and 5 % of nano calcium carbonate bring about nearly the same performance as the original mix design. In addition, wasted fibers were evaluated as structural element of the matrix material and this limits their amount in landfills. However, apart from this benefits it was observed that there was a slight decrease in the compressive strength values of the concrete.

### REFERENCES

- [1] Chesner, W. H., Collins, R. J., & MacKay, M. H. (1998). User guidelines for waste and by-product materials in pavement construction (No. FHWA-RD-97-148).
- [2] Meyer, C., & Xi, Y. (1999). Use of recycled glass and fly ash for precast concrete. *Journal of Materials in Civil Engineering*, 11(2), 89-90.
- [3] Meyer, C., & Baxter, S. (1998). Use of recycled glass and fly ash for precast concrete. Final report (No. PB--99-133118/XAB). Columbia Univ., Dept. of Civil Engineering and Engineering Mechanics, New York, NY (United States); New York State Energy Research and Development Authority, Albany, NY (United States).
- [4] Archibald, J. F., DeGagne, D. O., Lausch, P., & De Souza, E. M. (1995). Ground waste glass as a pozzolanic consolidation agent for mine backfill. *CIM bulletin*, 88(995), 80-87.
- [5] McClellan, G. W., & Shand, E. B. (1984). *Glass engineering handbook*.
- [6] Dhir, R., Dyer, T., Tang, A., & YONGJUN, C. (2004). Towards maximizing the value and sustainable use of glass. *Concrete*, 38(1), 38-40.

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

- [7] Diamond, S. (1983). On the glass present in low-calcium and in high-calcium flyashes. *Cement and Concrete Research*, 13(4), 459-464.
- [8] Shayan, A., & Xu, A. (2006). Performance of glass powder as a pozzolanic material in concrete: A field trial on concrete slabs. *Cement and concrete research*, 36(3), 457-468.
- [9] Lee, G., Ling, T. C., Wong, Y. L., & Poon, C. S. (2011). Effects of crushed glass cullet sizes, casting methods and pozzolanic materials on ASR of concrete blocks. *Construction and Building Materials*, 25(5), 2611-2618.
- [10] Ismail, Z. Z., & Al-Hashmi, E. A. (2009). Recycling of waste glass as a partial replacement for fine aggregate in concrete. *Waste management*, 29(2), 655-659.
- [11] Park, S. B., Lee, B. C., & Kim, J. H. (2004). Studies on mechanical properties of concrete containing waste glass aggregate. *Cement and concrete research*, 34(12), 2181-2189.
- [12] Limbachiya, M. C. (2009). Bulk engineering and durability properties of washed glass sand concrete. *Construction and Building Materials*, 23(2), 1078-1083.
- [13] Lam, C. S., Poon, C. S., & Chan, D. (2007). Enhancing the performance of pre-cast concrete blocks by incorporating waste glass—ASR consideration. *Cement and Concrete Composites*, 29(8), 616-625.
- [14] Kou, S. C., & Poon, C. S. (2009). Properties of self-compacting concrete prepared with recycled glass aggregate. *Cement and Concrete Composites*, 31(2), 107-



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)