



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 5      Issue: VI      Month of publication: June 2017**

**DOI:**

**[www.ijraset.com](http://www.ijraset.com)**

**Call:  08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# **Generation of Biogas and Enhancing its Methane Content by Chemical Absorption Technique**

Yunus Dalal<sup>1</sup>, Rajesh Kale<sup>2</sup>, Khan Aamir<sup>3</sup>

<sup>1,2,3</sup> Department of Mechanical Engineering, Rajiv Gandhi Institute of technology, Mumbai University

**Abstract:** *In this paper we will discuss India's existing biogas potential as a substitute to fossil fuels for domestic purpose. In the second part of the paper we will discuss the technique of upgrading the biogas using a chemical absorption technique for use in S.I engines as a substitute to compressed natural gas. A huge quantity of bio waste is generated in housing societies in metropolitan cities. Conversion of bio waste into biogas would result in localized municipal solid waste (MSW) management reducing the cost of transportation, eliminating the need of empty spaces for dumping grounds and also presenting an alternative source of fossil fuels. For experimentation, biogas was produced in a floating drum digester tank from daily produced kitchen waste and then with the chemical absorption technique using sodium carbonate ( $\text{Na}_2\text{CO}_3$ ) as the scrubbing liquid, biogas was upgraded to bio-methane. The outcomes of the experiment was a combustible biogas consisting of 44.14%  $\text{CO}_2$ , 53.19%  $\text{CH}_4$  and traces of other gases with a calorific value of 21180.25kJ/kg which when upgraded had around 88.39% methane and 8.05% carbon dioxide with a calorific value of 35196.89kJ/kg.*

**Keywords:** *Bio-waste, Biogas, Municipal solid waste, fossil fuels, Upgrading, Sodium carbonate, bio-methane.*

## **I. INTRODUCTION**

Rapid urbanization and industrial growth puts the limited energy resources of developing countries under pressure resulting in the augmentation of new and existing renewable energy options. Dependency on thermal power plants for energy requirements causes depletion of fossil fuel reserves of the country and associated emissions of greenhouse gases into the atmosphere. A greenhouse emission further causes global warming, climatic changes and damage to human and animals respiratory systems[1]. Specifically in India, the current energy scenario reveals a wide gap between the supply and demand of energy. Three-quarters of India energy demand is met by fossil fuels[2]. It becomes extremely essential to explore the unearthed and untouched renewable energy reserves of the country in an organized way. This will decrease the dependency on fossil fuel imports and improve the energy economy of the country. In India, there is tremendous potential of renewable energy like solar, wind, biomass, biogas, tidal energy etc. As of 30 April 2017, the country's solar grid had a cumulative capacity of 12.50 GW, wind power grid had a cumulative capacity of 32.28 GW, small hydro plants had a cumulative grid capacity of 4.38 GW, biomass had a cumulative grid power capacity of 8.18 MW and biogas had a cumulative off grid capacity of 49.56 MW [3]. There is huge potential of waste to energy conversion in India. Around 30 million tons of solid waste and 4400 cubic meters of liquid waste is produced in India every year. The municipal solid waste (MSW) generation range is from 0.25 to 0.66 kg/person/day with an average of 0.45 kg/person /day [4]. With proper segregation and organized channelling, all these waste can be converted to useful biogas which is a potential substitute to LPG useful for cooking and water heating. In this paper we will discuss the biogas generation process in a floating type digester tank installed at Rajiv Gandhi Institute of technology and in the second part we will discuss the methodology of upgrading the biogas using chemical absorption technique. Upgraded biogas is an alternate for CNG and when compressed to a pressure of 200bar can be directly used to propel IC engines [5].


Paper is organized as follows. Section II describes biogas generation process in a floating drum digester tank using food waste. Biogas generated can be used directly in cooking stove and for water heating purpose. Raw biogas has a low calorific value for its use in engines. Section III describes the process of biogas scrubbing using solution of sodium carbonate. The complete setup will be discussed in this section. Biogas obtained after scrubbing is enhanced in methane content. Section IV presents experimental results showing graphs for raw and upgraded biogas obtained by gas chromatography technique. Finally, Section V presents conclusion.

## **II. GENERATION OF BIOGAS**

Biogas consists of 50-70% methane, 30-45% carbon dioxide, traces of water vapor and hydrogen sulfide [6]. The process of anaerobic digestion converts food waste to biogas as shown in fig 1. Anaerobic digestion of organic waste in a digester tank takes place in four key stages biogas namely hydrolysis, acidogenesis, acetogenesis and methanogenesis. The overall process can be

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

described by the chemical reaction, where organic material such as glucose ( $C_6H_{12}O_6$ ) is biochemically digested into carbon dioxide ( $CO_2$ ) and methane ( $CH_4$ ) by the anaerobic microorganisms.



### A. Hydrolysis

In most cases, biomass is made up of large organic polymers. For the bacteria in anaerobic digesters to access the energy potential of the material, these chains must first be broken down into their smaller constituent parts. These constituent parts, or monomers, such as sugars, are readily available to other bacteria. The process of breaking these chains and dissolving the smaller molecules into solution is called hydrolysis.

### B. Acidogenesis

The biological process of acidogenesis results in further breakdown of the remaining components by acidogenic bacteria. Here, VFAs are created, along with ammonia, carbon dioxide, and hydrogen sulphide, as well as other byproducts.

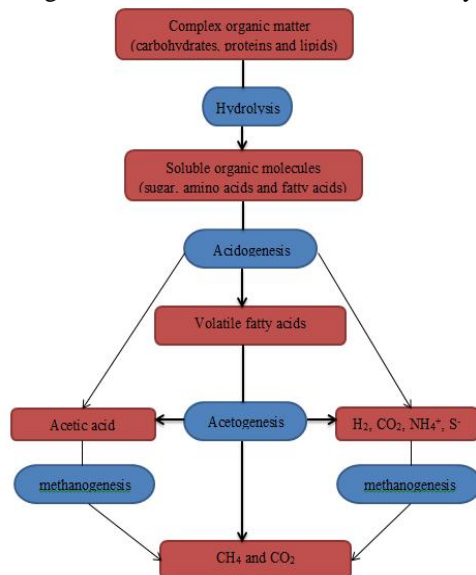


Fig.1 Stages of anaerobic digestion [7]

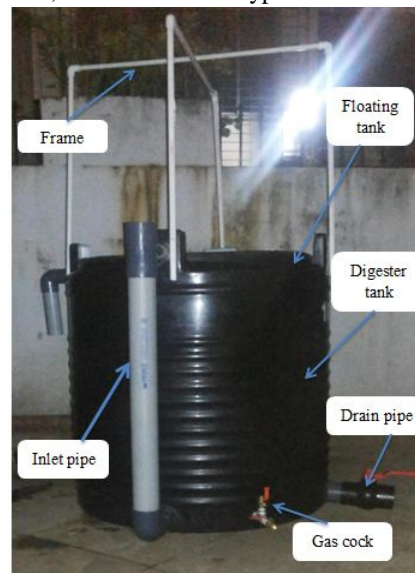


Fig.2 Biogas digester tank setup

### C. Acetogenesis

The third stage of anaerobic digestion is acetogenesis. Here, simple molecules created through the acidogenesis phase are further digested by acetogens to produce largely acetic acid, as well as carbon dioxide and hydrogen.

### D. Methanogenesis

The terminal stage of anaerobic digestion is the biological process of methanogenesis. Here, methanogens use the intermediate products of the preceding stages and convert them into methane, carbon dioxide, and water. These components make up the majority of the biogas emitted from the system. Methanogenesis is sensitive to both high and low pHs and occurs between pH 6.5 and pH 8. The remaining, indigestible material the microbes cannot use and any dead bacterial remains constitute the digestate [7].

We use to feed 1 cubic meter biogas digester tank with 4 kg of food waste on daily basis which used to produce about 400gms of biogas with a burning time of approximately 90 min sufficient for cooking meals 2 times a day. This offsets the requirement of LPG for domestic purpose and also treats the kitchen waste locally.

## III. BIOGAS UPGRADING

Carbon dioxide is second largest constituent in biogas after methane. Presence of carbon dioxide in the biogas reduces its thermal efficiency. So, removal of biogas is a must to make biogas a competitive renewable fuel by increasing its efficiency [8]. Different biogas scrubbing techniques such as pressure swing adsorption, temperature swing adsorption, water scrubbing, air separation units and many other absorption techniques using amines and alcohols for absorption have been studied and reviewed subject to various operating parameters. On comparison water scrubbing proved to be a potential competitor for  $CO_2$  scrubbing but the problem was

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

the regeneration of scrubbed water which carried dissolved  $\text{CO}_2$  and also the system had high pressure requirements. This shortcoming was given due consideration and use of aqueous solution of  $\text{Na}_2\text{CO}_3$  was considered as a potential solution to the problem of regeneration. The different parameters for design consideration of the scrubbing unit are working pressure, tower packing, height and diameter of the packed bed. The experimental setup for scrubbing of biogas generated in the biogas digester is shown in Fig.3 The technique is based on the principle of adsorption of  $\text{CO}_2$  by counter current flow of biogas in a packed bed column with the scrubbing sodium carbonate ( $\text{Na}_2\text{CO}_3$ ) liquid travelling downward which is then collected in a separate tank.



Fig 3 Setup for biogas scrubbing

Upgraded biogas had increased content of methane and reduced content of carbon dioxide, hydrogen sulfide and traces of other gases. With the use of sodium carbonate for scrubbing, affinity of  $\text{CO}_2$  to water increases even at low pressure. The setup was completed in the premises of Rajiv Gandhi Institute of technology and the test results for biogas composition before and after upgrading were obtained by conducting a test on a gas chromatography machine. The test results are discussed in section IV.

### IV. RESULTS AND DISCUSSIONS

First the raw biogas sample was tested for its composition and after knowing the composition the calorific value of the gas was computed. Similarly the values for composition and calorific value were computed for upgraded biogas. The peak height versus time plot for the calibrated gas, raw biogas and upgraded biogas is shown in fig.4, fig.5 and fig.6 respectively. After obtaining the area under the graph for the three samples we were able to calculate the composition of methane and carbon dioxide in the biogas by the method of normalizing and thus able to find its calorific value.

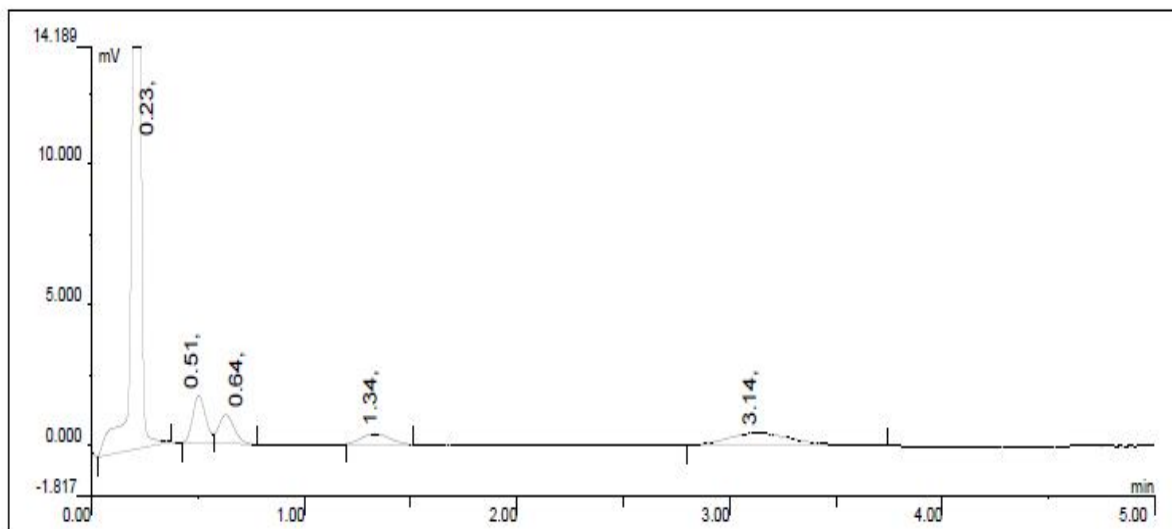


Fig.4 Peak Diagram of different constituent gases of calibration mixture.

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

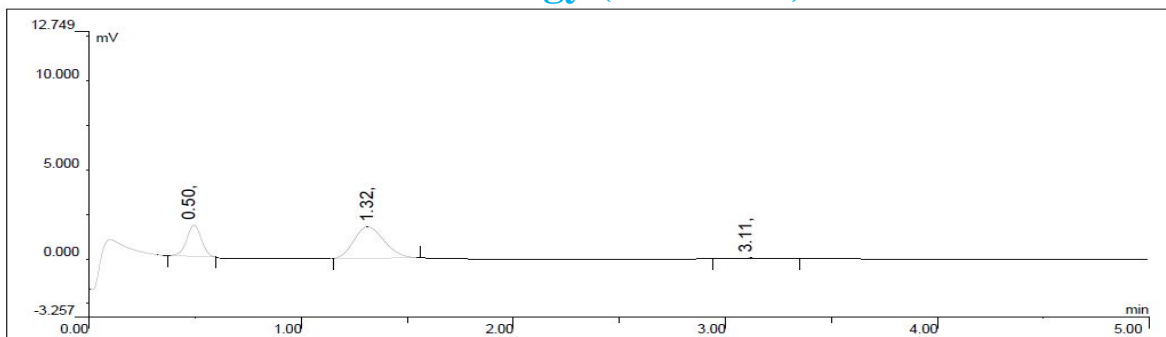


Fig.5 Peak Diagram of different constituent gases of raw biogas

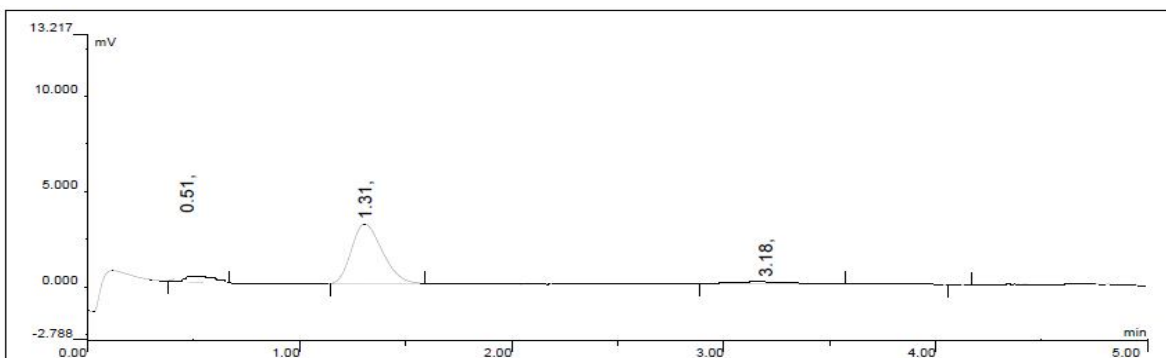


Fig.6 Peak Diagram of different constituent gases of upgraded biogas

Table I shows the result of percent area for each constituent gas present in the calibrated mixture.. The readings thus obtained can be used as a reference for the actual sample of the gas to be tested. Table II shows the area under the curve for different gases and it is clearly evident that the maximum area is for CH<sub>4</sub> followed by CO<sub>2</sub> and N<sub>2</sub>. This data can be used to determine the percentage of each constituent gas present in raw biogas by comparing it with the area of the same constituent gas in the calibrated mixture and then normalizing the values to get the required values. Table III clearly shows variation in areas for raw and upgraded biogas. The peak height of CO<sub>2</sub> is almost negligible meaning very less percentage of CO<sub>2</sub> presence in this sample of biogas which subsequently means a higher calorific value of the fuel.

Table I  
 area%, height % for calibrated mixture containing h<sub>2</sub>, co<sub>2</sub>, co, ch<sub>4</sub> and n<sub>2</sub>

Sr No.	Component Name	Ret. Time.	Area μ Volt Sec	Area %	Height μ Volt	Height %
1	Hydrogen	0.23	86608.7429	77.15	38280	91.58
2	Carbon Dioxide	0.51	7237.7649	6.45	1680	4.02
3	Carbon Monoxide	0.64	5293.3850	4.72	1022	2.45
4	Methane	1.34	3492.3429	3.11	377	0.90
5	Nitrogen	3.14	9627.5429	8.58	440	1.05
			112259.7785	100.00	41800	100.00

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

Table ii  
 area%, height % for raw biogas containing CO<sub>2</sub> and CH<sub>4</sub>

Sr. No.	Component Name	Ret. Time.	Area $\mu$ Volt Sec	Area %	Height $\mu$ Volt	Height %
1	Carbon-dioxide	0.50	6377.915	24.07	1754	49.36
2	Methane	1.32	19564.085	73.86	1760	49.52
3	Nitrogen	3.11	544.3429	2.06	40	1.13
			26486.8000	100.00	3554	100.00

Table iii  
 Area%, height % for upgraded biogas containing CO<sub>2</sub> and CH<sub>4</sub>

Sr. No.	Component Name	Ret. Time.	Area $\mu$ Volt Sec	Area %	Height $\mu$ Volt	Height %
1	Carbon-dioxide	0.51	1670.4685	3.38	112	1.70
2	Methane	1.31	46709.0744	94.51	3137	47.45
3	Nitrogen	3.18	1042.77	2.11	108	1.64
			49422.3129	100.00	6611	100.00

MASS COMPOSITION AND CALORIFIC VALUE OF RAW AND UPGRADED BIOGAS

Normalizing method to determine percentage composition of constituent gases of raw biogas as the calibrated mixture consists of hydrogen and carbon monoxide which are not present in the raw biogas. The terminology used and normalizing method adopted is explained as follows.

### A. Terminology

- X<sub>carbon-dioxide</sub> » Percentage composition of CO<sub>2</sub> in raw biogas
- X<sub>methane</sub> » Percentage composition of CH<sub>4</sub> in raw biogas
- X<sub>nitrogen</sub> » Percentage composition of N<sub>2</sub> in raw biogas
- Y<sub>carbon-dioxide</sub> » Percentage composition of CO<sub>2</sub> in upgraded biogas
- Y<sub>methane</sub> » Percentage composition of CH<sub>4</sub> in upgraded biogas
- Y<sub>nitrogen</sub> » Percentage composition of N<sub>2</sub> in upgraded biogas
- A » Percentage area of CO<sub>2</sub> in raw biogas
- B » Percentage area of CH<sub>4</sub> in raw biogas
- C » Percentage area of N<sub>2</sub> in raw biogas
- A<sub>u</sub> » Percentage area of CO<sub>2</sub> in upgraded biogas
- B<sub>u</sub> » Percentage area of CH<sub>4</sub> in upgraded biogas
- C<sub>u</sub> » Percentage area of N<sub>2</sub> in upgraded biogas
- C<sub>carbon dioxide</sub> » Calibration cylinder constant for CO<sub>2</sub>
- C<sub>methane</sub> » Calibration cylinder constant for CH<sub>4</sub>
- C<sub>nitrogen</sub> » Calibration constant for N<sub>2</sub>

### B. Normalizing

Percentage of CO<sub>2</sub> in raw biogas (X<sub>carbon-dioxide</sub>)

$$A = \frac{6377.915}{7127.7649} \times (C_{\text{carbon dioxide}})$$

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

$$A = \frac{6277.925}{7237.7649} \times (26.01)$$

$$A = 22.92$$

$$X_{\text{carbon-dioxide}} = \frac{A}{A+B+C}$$

$$X_{\text{carbon-dioxide}} = 44.14\%$$

Percentage of CH<sub>4</sub> in raw biogas (X<sub>methane</sub>)

$$B = \frac{19564.085}{3492.3429} \times (4.93)$$

$$B = 27.6178$$

$$X_{\text{methane}} = \frac{B}{A+B+C}$$

$$X_{\text{methane}} = 53.19\%$$

Percentage of N<sub>2</sub> in raw biogas (X<sub>nitrogen</sub>)

$$C = \frac{544.8429}{9627.5429} \times (C_{\text{nitrogen}})$$

$$C = \frac{544.8429}{9627.5429} \times (24.5)$$

$$C = 1.38$$

$$X_{\text{nitrogen}} = \frac{C}{A+B+C}$$

$$X_{\text{nitrogen}} = 2.67\%$$

Calorific Value of Raw biogas:

$$\begin{aligned} C.V_{\text{raw biogas}} &= X_{\text{methane}} \times C.V \text{ of CH}_4 \\ &= 0.5319 \times 39820 \end{aligned}$$

$$C.V_{\text{raw biogas}} = 21180.258 \text{ kJ/kg}$$

Percentage of CO<sub>2</sub> in upgraded biogas (Y<sub>carbon-dioxide</sub>):

$$A_u = \frac{1670.4685}{7237.7649} \times (C_{\text{carbon dioxide}})$$

$$A_u = \frac{1670.4685}{7237.7649} \times (26.01)$$

$$A_u = 6.004$$

$$Y_{\text{carbon-dioxide}} = \frac{A_u}{A+B+C}$$

$$Y_{\text{carbon-dioxide}} = 8.05\%$$

Percentage of CH<sub>4</sub> in Upgraded biogas (Y<sub>methane</sub>):

$$B_u = \frac{46709.0744}{3492.3429} \times (C_{\text{methane}})$$

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

$$B_u = \frac{46709.0744}{3492.2429} \times (4.93)$$

$$B_u = 65.93$$

$$Y_{\text{methane}} =$$

$$Y_{\text{methane}} = 8 \frac{A}{A+B+C} 8.39\%$$

Percentage of N<sub>2</sub> in Upgraded biogas (Y<sub>nitrogen</sub>):

$$C_u = \frac{1042.77}{9627.5429} \times (C_{\text{nitrogen}})$$

$$C_u = \frac{1042.77}{9627.5429} \times (24.5)$$

$$C_u = 2.6536$$

$$Y_{\text{nitrogen}} = \frac{A}{A+B+C}$$

$$Y_{\text{nitrogen}} = 3.56\%$$

Calorific Value of Upgraded biogas

$$\begin{aligned} \text{C.V. Upgraded biogas} &= Y_{\text{methane}} \times \text{C.V. of CH}_4 \\ &= 0.8839 \times 39820 \end{aligned}$$

$$\text{C.V. Upgraded biogas} = 35196.898 \text{ kJ/kg}$$

The percentage of CO<sub>2</sub>, CH<sub>4</sub> and N<sub>2</sub> content in raw biogas was found to be 44.14%, 53.19% and 2.67% respectively. The calorific value of raw biogas obtained from biogas plant is determined to be 21180.25kJ/kg due to presence of excess CO<sub>2</sub>. The concentration of CO<sub>2</sub> is reduced by upgrading the biogas and also its calorific value is increased. On upgrading the percentage composition of CH<sub>4</sub> increased to 88.39% and that of CO<sub>2</sub> was reduced to 8.05%. The calorific value of upgraded biogas was determined to be 35196.89kJ/kg which is approximately same as that of CNG.

### V. CONCLUSIONS

With huge quantities of organic waste available, significant conversion of waste to energy is possible resulting in localized disposal of waste. With organized waste collection practices, municipalities can produce biogas in ample quantities with effective disposal of waste. The kitchen waste can be directly feed in to the digester tank and the biogas generated can be used for cooking meals. A small size kitchen waste digester can partially offset the LPG requirement of a household for cooking meals. Upgrading of biogas by sodium carbonate scrubbing reduces the CO<sub>2</sub> content of biogas by 81.70% and increases the CH<sub>4</sub> content by 66.20% thus making bio-methane a feasible fuel for use in automobile and static engines.

### REFERENCES

- [1] K. Sudhakar, M. Premalatha, and M. Rajesh, "Large-scale open pond algae biomass yield analysis in India: a case study," Int. J. Sustain. Energy, vol. 6451, no. June 2015, pp. 1–12, 2012.
- [2] W. Energy and O. Special, "India Energy Outlook."
- [3] "Physical progress report", Ministry of New and Renewable Energy, Last visited on 2017.06.01
- [4] C. Marimuthu and V. Kirubakaran, "A critical review on potential of energy recovery and carbon saving through anaerobic digestion method in India," Int. J. ChemTech Res., vol. 7, no. 4, pp. 1902–1912, 2015.
- [5] V. K. Vijay, "Biogas refining for production of bio-methane and its bottling for automotive applications and holistic development," Proc. Int. Symp. Eco Topia ..., vol. 7, pp. 35–40, 2007.
- [6] S. D. R, N. H. J, and A. Pradeep, "Purification of Biogas using Chemical Scrubbing and Application of Purified Biogas as Fuel for Automotive Engines," vol. 5, pp. 1–7, 2016.
- [7] L. P. C. Y. J. Di Renzo, "SpringerBriefs in Environmental Science," p. 103, 2012.



## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

- [8] F. R. H. Abdeen, M. Mel, M. S. Jami, S. I. Ihsan, and A. F. Ismail, "A review of chemical absorption of carbon dioxide for biogas upgrading," Chinese J. Chem. Eng., vol. 24, no. 6, pp. 693–702, 2016.



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)