



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 5 Issue: VII Month of publication: July 2017

DOI:

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Developing a New Curing Technique-‘Drip Curing’

Kanchan Ambekar¹, K.U. Gandhare²

^{1,2}Civil Department, TSSM's Bhivarabai Sawant College Of Engineering & Research, Narhe

Abstract: *It is said in civil engineering field that water worth Rs1 saves concrete worth Rs99 it means a concrete worth Rs99 if not cured with water worth Rs1, it is worth less. So sometimes it happens that concrete and other structures in which cement is used like brickwork, plaster, PCC etc. may not get its required strength due to lack of water for curing over a specified time. Curing is at most essential if cement structure is to perform as per its design the intended functions for the designing life of the structure. While excessive use of water in short time, which is not essential may lead to the escalation of the construction cost due to excessive water use for curing use. For curing setting of cement is exothermic reaction it emits heat during the setting period. It needs water in the proportion to the heat generated to take away the heat from concrete. At site, practically water for curing is given by a flexible pipe, throwing water at a high speed due to powerful pumps resulting in bouncing back the water from the concrete structure. This watering is done twice or thrice a day, which is absolutely insufficient. And again due to the high speed requirement of construction, sometimes slabs are casted with a span of 12 to 15 days keeping the formwork of the lower floors as it is. And in this case it is not possible even to approach the concrete structure and cure it. The overall aim of this paper is to develop a new technique for curing using which concrete and other cement structures gets the required amount of water in a continuous manner with minimum water wastage. The mechanism used in Israel, where there is scarcity of water to provide only and only requires quantity of water to the plants is drip irrigation and in this project the same technique is used for curing purpose. Compressive strength test was conducted on concrete blocks cured with different methods of curing (spraying method, immersion method and drip curing method). Test results indicate that compressive strength of the concrete cured with drip curing method was comparatively much higher than the spray cured blocks (normally used type of curing on site) and along with the increase in strength of concrete, the water saved from using his method is considerably more, with easy to use application method.*

Keywords: *Drip curing, compressive strength, water conservation, on site application, total cost.*

I. INTRODUCTION

Concrete failures or brittle concrete, severe cracks in plaster, non-hardening of finished surfaces are generally observed at faulty construction sites and are associated to several reasons; right from improper concrete mix design, nonstandard properties of materials used, improper mixing, placing, compaction, curing procedures and many more. There are many wrong practices and concepts about the duration of curing of concrete and other cement used structures like plaster. Especially when we refer to site conditions in metro cities like Mumbai, Chennai, Kolkata and other A class, B class, C class and D class cities like Pune, Kolhapur etc. it is banned to use domestic supply of water supplied by the corporation to use (tap water) for the purpose of construction. So a bore well is bored for supply of water and it is found that 75% of the bore wells have no yield are very less yield of water. Hence water for construction is brought to site by the paid tankers. And due to the scarcity of water, the water used for curing is much less than required. The way the water is sprayed on concrete, most of it wasted with very little use for curing. On many occasions, it is found that the curing period of concrete elements, plasters, brickwork etc. is left to the discretion of the site staff, especially a male illiterate labor that has no knowledge of the importance of curing. Improper curing is considered as one of the significant reasons for achieving less compressive strength in concrete for columns, beams, slabs, pavements, etc., evident in the form of cracks, which are easily noticeable by the naked eyes. The vertical member like a column, in particular, is one of the most victimized RCC elements which must be carefully cured, as the entire dead load and live load of the super structures are supported by columns and transferred to the foundations. Unfortunately, adequate curing is not given much importance at most of the sites and traditional methods of curing are adopted which leads to reduction in the durability of the structure. Curing of concrete by drip curing method means supplying only required quantity of water continuously to keep the surface moist throughout the setting period, initial and final of the concrete structure, in order to develop the desired properties in terms of strength and durability. A good curing practice involves keeping the concrete damp until the concrete or cement structure like plaster is reached to its desired final setting time and has achieved desired strength. Even though a handsome money is spent on quantity and quality of cement, the desired strength of

cement structure are not reached due to negligence or shortage of water and bad curing practices followed in most of the cases, leading to a weak concrete or cement structures though appropriate money is spent for cement.

II. RESEARCH SIGNIFICANCE

- A. By this simple curing method the strength of concrete increases by almost 30-40% than the normal strength achieved by traditional method of curing.
- B. Due to increase in strength, factor of safety implied to the concrete design can be reduced and hence final design of structure can be done with reduced cross-sectional areas of structural members, ultimately saving on the cost of construction.
- C. In water scarce areas, water can be used in a very controlled manner avoiding the excess fruitless spraying of water. At the same time with minimum quantity of water maximum strength can be achieved.
- D. For external plastering, which has to face all the weather conditions, systematic drip curing increases the strength of plaster, minimizes the major and minor cracks and makes it tough and solid to face the extreme weathers like very hot sun, too cold and extreme rains. Since there is little seepage of water through the plaster, rusting of steel components is avoided and protected. Water leakage inside a building is also reduced to a significant limit.
- E. This system can be used repeatedly for many times and for many projects, and so the operational cost is very negligible as compared to total cost of construction.
- F. This system can be installed by any layman. No skilled worker is required to install it. Once fitted it cures the structure for all curing period it requires. The pressure of pumps fitted to supply the water can be adjusted, lowered or increased according to the discharge required at the end point of curing. In the initial stage of setting of concrete or cement structure requires more water and at the time of final setting it requires less water. Water discharge can be adjusted as per the requirement by just increasing or decreasing the pressure of the pump.
- G. Water being the most important raw material required for construction, with proper handling and supplying through drip cure method, gives a great boost to the strength to all cement related structures.

III. OBJECTIVES

- A. To find the different strengths of concrete cubes cured with different curing methods like spraying method, drip curing method and immersion method.
- B. To measure the quantity of water used by traditional spraying method (commonly used curing method on site) for curing and quantity of water required by drip cure method.
- C. To study the water requirement for the entire span of curing of concrete of 28 days and water consumed with change in quantity as per requirement at site using drip cure method and establishing the fact that water required for excellent curing (if supplied properly) is much less than traditional method. And hence saving the water and reduce wastage of water.
- D. Implementing a semi-automatic system to reduce the human errors.
- E. To find and establish the effectiveness of drip curing method in structural members like column, beam, slab, plaster etc. also to find practical implementation of this system of drip curing and to find out the practical problems for implementation and ways to resolve it.
- F. To control the curing in controlled manner and reducing the dependency for curing on unskilled labours and also occurrence of no curing due to holidays of labours.
- G. To increase the continuous contact between water and concrete.
- H. To find the increase in cost of construction caused due to use of drip curing method.

IV. EXPERIMENTAL DETAILS

- A. *Experiment on Strength on Concrete Cube of Strength M25 by Different Curing Method*
- B. *Experiment on Calculating the Quantity of Water Required by Different Methods*
 - 1) *Sample Preparation:* To start with a concrete mix of strength M25 was prepared at site at 'Ishan Laxmi', Bharatkunjia soc, Erandwane, pune. Total 24 cubes of 150mmx150mmx150mm were cast. After 24 hours that is initial setting time, 8 cubes were put in different buckets filled with water for immersion method. For spraying method again 8 cubes were kept aside and the labor was instructed to spray the water on cubes every time he sprays water to freshly prepared columns. For drip curing method remaining 8 were also kept aside and were surrounded by the drip irrigation pipes. As it was not possible to fit a pump

for this experiment the drip pipes were connected to a small overhead water tank at 3m head specially erected to supply water by gravity. The compressive strength was calculated by comparing three different types of curing namely; Immersion method, spraying method, drip curing. From 24 cubes 8 cubes in every method 4 were cured for 7 days and the other 4 for 28 days. Then these cubes were tested using compression testing machine.

V. TEST METHODOLOGY

A. Submerging in Water Bath

Submerging concrete in water is the ideal way of curing. In this concrete cubes are submerged into the water tank till the curing period gets over and every time the buckets are topped up with water to compensate the loss of water due to exothermic reaction of concrete. First 4 blocks are removed from water after seven days and remaining 4 blocks after 28 days. In this the concrete gets in contact with the water for almost all the time and thus the water requirement for the concrete is satisfied 100%. So the strength obtained is maximum. But this method is practically impossible to apply practically on/at project site since the concrete members are in huge quantity and at various heights. To submerge them in water is totally impractical and impossible. And hence desired strength as per the IS standard is not obtained by the concrete members practically.



Figure no 1:- cube submerged in a bucket full of water.

B. Spraying

Spraying is one of the easily available and generally adopted ways of curing which is practically possible. Sprinkling of water continuously on the concrete surface provides an efficient curing. It is mostly used for curing all concrete members like columns, beams, slab and cement structure like plaster and tiles. Spraying of water is started only after the initial setting period of 24 hours. Vertical, horizontal and sloping surfaces can be kept continuously wet by sprinkling water on surfaces. For this method of curing the water requirement is quite higher and comparatively wastage is of grate quantity. Practically when the formwork is prepared, generally burnt black oil is applied to formwork so as to prevent concrete sticking and holding to formwork. Due to use of oil the concrete members formed gets uniform smooth surface after the formwork is removed. But the most disadvantage of the method is that the oil remains on the surface of concrete and it prevents the contact between the sprayed water and the concrete ad so most of the sprayed water is wasted and has partial contact with concrete. On the vertical surface the water does not retain on the concrete due to runoff by gravity. Again the other disadvantage of spraying is, it is done purely manual and by a non-skilled labor. The spraying totally depends on the availability of water, availability of man power, availability of electricity at site to use the water pumps and many other aspects e.g. Generally on holidays of labors very less curing is done in spite of the fact the concrete is in its setting time and needs a continuous spraying of water. Spraying also depends upon the diameter of pipe used and the pressure of pump applied and also at what height (head) the spraying is done. With lesser diameter and lesser HP of pump the discharge from the pipe is very less and accordingly to cover the maximum area in lesser time the labor do very less spraying and for lesser period than required. As against if broader pipe is used with higher pump ratio, the water is bounced back and flows down from the vertical surfaces like column and plaster and there is very little use of water for curing and wastage of water is high. Practically good

spraying can be done in early morning when there is no other activity at site. But once the other activities like formwork of next proposed structure, brickwork, plaster gets started, there is a movement of labors at site and so practically very less spraying is done in these working hours as it becomes hurdle for the labors doing other activities and so it is avoided. Almost all spraying is done manually and there is a great scope of human error. There are very few controlling methods of keeping the track record of curing by spraying at site. So the curing of concrete and the strength of concrete is almost at mercy of the non-skilled labor, availability of electricity, availability of abundant water and many other things.



Figure no 2:- Spraying on a concrete cube.

C. Drip Curing

Drip curing is a new technique proposed to use in which the concept of “Drip Irrigation” i.e. using drip pipes to spray/discharge water over the whole area of farm field is used for watering the plants. So to cure the concrete members by using this method, it is called drip curing method. At site a variable pressure pump is connected to the network of pipes. The network consists of mains, sub-mains, secondary and tertiary pipes drip pipes. The drip pipes are the last member of network which is kept in contact with concrete. In our experiment the cubes were surrounded by drip irrigation pipes. These pipes are connected to mains. The water is supplied to mains from an overhead water tank by gravity. The discharge is controlled by a nob attached to the mains. The discharge is kept higher in initial setting time and gradually reduced, as per the requirement of concrete till the final setting time. The cubes are placed on plane surface, in open directly exposed to the sunlight, similarly as the actual structural members. This drip pipes continuously discharge water with variable quantity of discharge as per requirement. The discharge of water is monitored so as to keep the concrete surface always wet. The drip pipes used are of different types manufactured by company with the specification of 160ID and 320OD of .The pores of the pipe are of porous hoes type type and the prescribed discharge is 4.95LPH. The 4 cubes were given drip curing for 7 days and remaining 4 cubes were given drip curing for 28 days. Curing period was non-stop full for 24 hours per day. It means curing was done throughout day and night. The flow and discharge was monitored once in a day in the morning. The total water consumption was also measured by the actual water released from the overhead water tank. This was compared with the standard discharge specified by the manufacturing company.



Figure no 3:- Curing of concrete block using drip curing

1) *Test Results for Immersion Method for 7 and 28 days:*

Table no1:-Compressive strength of cubes cured for 7 days using immersion method

Identification mark	Age of curing (days)	Compressive Strength (N/mm ²)	Average compressive strength (N/mm ²)
G1	28	24.22	
G2	28	24.67	
G3	28	24.54	24.59
G5	28	24.93	

Table no2:-Compressive strength of cubes cured for 28 days using immersion method

Identification mark	Age of curing (days)	Compressive Strength (N/mm ²)	Average compressive strength (N/mm ²)
F1	7	16.70	
F2	7	16.58	
F3	7	17.10	16.79
F4	7	16.81	

2) *Test results for Spraying Method for 7 and 28 Day:*

Table no3:-Compressive strength of cubes cured for 7 days using spraying method

Identification mark	Age of curing (days)	Compressive Strength (N/mm ²)	Average compressive strength (N/mm ²)
H1	7	12.71	
H2	7	12.59	12.65
H3	7	12.52	
H4	7	12.78	

Table no4:-Compressive strength of cubes cured for 28 days using spraying method

Identification mark	Age of curing (days)	Compressive Strength (N/mm ²)	Average compressive strength (N/mm ²)
I1	28	19.27	
I2	28	19.53	19.51
I3	28	20.07	
I4	28	19.17	

3) Test Results for Drip Curing Method for 7 and 28 Days :

Table no5:-Compressive strength of cubes cured for 7 days using drip curing method

Identification mark	Age of curing (days)	Compressive Strength (N/mm ²)	Average compressive strength (N/mm ²)
K1	7	14.10	
K3	7	13.52	13.86
K4	7	13.95	
K5	7	13.88	

Table no6:-Compressive strength of cubes cured for 28 days using drip curing method

Identification mark	Age of curing (days)	Compressive Strength (N/mm ²)	Average compressive strength (N/mm ²)
J1	28	21.22	
J2	28	20.92	
J4	28	21.63	21.33
J5	28	21.57	

4) Comparison of the Three Methods:

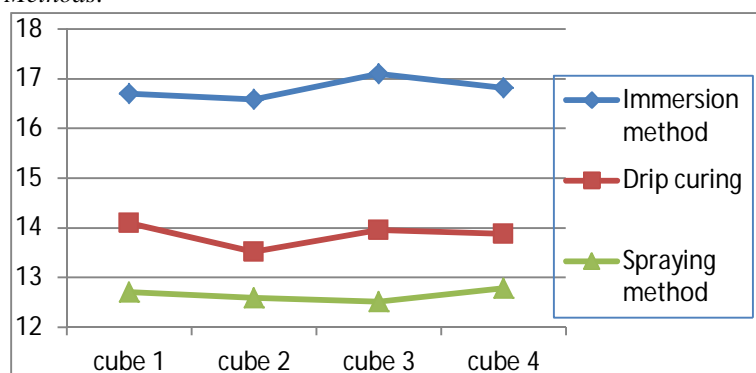


Figure no4:- Strength of concrete for 7 days curing

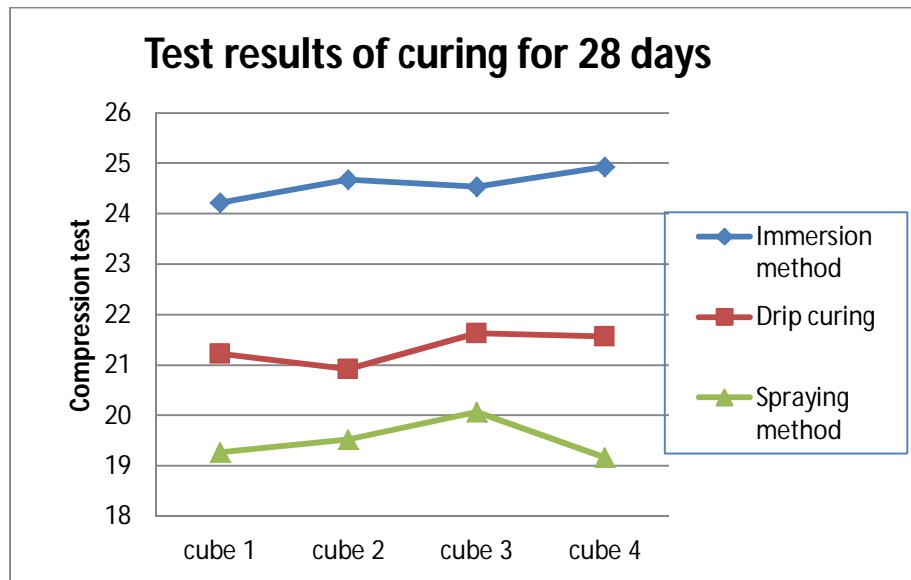


Figure no5:- Strength of concrete for 28 days curing

VI. COSTING

A. Effect on Strength

The results of compressive strength have been presented in tables and in the graphical representation of average compressive strength versus curing age for different methods of curing used in the experiment. In the curing methods mentioned above, the compressive strength of concrete is observed to be increasing with age. The highest compressive strength at all ages was produced by immersion (water) curing. The average compressive strength of immersion water cured concrete was 16.29N/mm^2 and 23.29N/mm^2 at 7 and 28 days respectively. Sprinkling method produced a compressive strength of 14.43N/mm^2 and 20.51N/mm^2 at 7 and 28 days respectively. Drip curing method produced a compressive strength in between of immersion curing and spraying curing but nearer to immersion curing 16.03N/mm^2 and 22.98N/mm^2 at 7 and 28 days respectively. Practically speaking in comparison with two practical methods of curing i.e. drip curing and spraying method, the development of higher compressive strength in drip curing method is credited to sufficient and continuous supply of water and moisture, which were maintained to continue the hydration of cement. As we can see that immersion of concrete is not feasible on site so the best option is Drip curing.

B. Effect on Quantity of Water

The project of 180sq.m plinth area per floor with 9 columns is considered for calculations

Normally on site water consumed for curing is dependent on the type of motor used, pipe size etc. On site spraying method is used to cure the concrete and using 0.5hp motor pump and $1''$ pipe water is sprinkled on the surface of the concrete say for 1 hour, twice/thrice a day. The standard discharge of the water is 1930LPH for 6m head. It decreases with increase in head. It reaches up to 325LPH for 28m head. Therefore taking an average of 17m head it is approximately 1170LPH .

The water required for drip curing is less as compared to spraying method. We have to use mains, sub-mains and secondary drip pipes to form the network of drip curing. Different types of drip pipes can be used for different parts of building. For e.g. porous hoses systems has a minute holes everywhere on the pipe and so can be use full for laying over the slabs as against pre-installed emitters system has holes only in one line with uniform distance in between they are most suitable for drip curing for columns, beams, plastering etc. The water discharge from the drip pipes curing is as follows as per the company standards with some specified pressure from pumps. Water required for spraying method considering 1 hour spraying thrice a day is $1170 \times 3 = 3510$ liters per day

1) Pre-Installed Emitters System:

- a) For $\frac{1}{2}''$ pipe, 1m length- 7.58LPH
- b) For $\frac{1}{4}''$ pipe, 1m length- 12.42LPH

2) *Porous Soaker Hose Systems:*

- a) For 1/4" pipe, 1m length-4.95LPH

The discharge from the drip pipe, considering the average of pre-installed emitter system 1/4" and porous soaker hose system is 8.68LPH. But this is for irrigation purpose with full water head pressure of pumps for a supply of water to crops for a limited period. At our site this is not required by observation the controlling knob was so adjusted that to keep the entire concrete surface continuously wet it was observed that 1000 lit tank is emptied in 2 days period. And so per day consumption was about 500 lit. So the quantity of water required is 500LPD and hence the water saved by using drip cure method is 3010 LPD.

C. *Effect on Cost:*

- 1) A project of 180sq.m plinth area of g+5. Additional cost required for materials and installation of the system.
- 2) The length of pipe required for columns is approximately 63.72m for 9 columns and for beams it is 36.31m. Total length of pipe required is approximately 100.03m.
- 3) The price of pipe is Rs4437/- for 500m length of pipe. So the price of pipe for 100 m is Rs888/-
Adding 30% for taxes and wastage it
 $888 \times 1.3 = \text{Rs}1154/-$
- 4) Considering the mains of 1/2" of 10m @ Rs20 per m that is Rs200/-
- 5) Special separate water tank of 1000lit @ Rs6 per liter that is for Rs6000 / lit.
- 6) The installation cost will be approximately 3 labors a day coming to Rs1200/-.
- 7) The total capital cost is Rs8554/-.
- 8) Considering this set up to be used at least for 10 times the cost per single application is Rs855/-
- 9) Amount of money saved due to saving wastage of water.
- 10) The cost of a tanker for 8000ltr of water is Rs1000. Therefore if we save 3010LPD water the money saved per day will be Rs376/-
- 11) With almost 1/3 water consumption the acquired strength of concrete is more by almost 10 %.
- 12) The valuation of cost of increase in strength of concrete is nearly impossible but it is definitely a gain in life and stability of structure.

VII. APPLICATION



Figure no 6:- drip curing applied to a column on site



Figure no 7:- Drip curing applied on a lift shaft on site

VIII. CONCLUSION

- A. The immersion method showed the highest compression strength. But we cannot keep concrete structure immersed in the water bath so the second best method i.e. Drip curing is feasible to be used.
- B. Practically drip curing is the most effective method of curing. It produced the highest level of compressive strength practically at site. This is due to nonstop supply of required water to cool down the exothermic reaction of concrete, resulting from greater degree of cement hydration reaction uniformly.
- C. As in the drip curing the water spreads over the area giving the concrete to absorb water and fulfill its water requirement.
- D. As in case of sprinkling of water the water rushes over the block and the contact time with concrete is very less. Total 3010 liters per day water can be saved by using drip curing method for curing.
- E. The amount required for a project of 180sq.m plinth area considering this system will be re used for all 5 floors of the same project and also considering that whole system can be used for one more project, the one-time installing expenses of drip curing is used for 10 times the slab area, since the expenses for 1 floor is calculated as Rs855/-.
- F. The amount saved by saving water is Rs375/- per day.
- G. In the cities where there is water scarcity, without compromising with the quality and strength of concrete we can achieve the results with very less quantity of water.

REFERENCES

- [1] A. Bentur and C. Jaegermann, "Effect of curing and composition on the properties of the outer skin of concrete," Journals of materials in civil engineering, Vol 3, No 4, November @ ASCE.
- [2] Dan ye M.ASCE, Chang-Seon Shon M.ASCE, Anal K. Mukhopadhyay "New performance based approach to ensure quality curing during construction," ASCE Journal of materials in civil engineering July 2010.
- [3] M.S.Shetty "Concrete Technology" theory and practice. S. Chand & company Pvt. Ltd.
- [4] Neville A. M.& Brooks Concrete Technology. Longman Scientific.
- [5] N.R. Shattaf, A.M. Alshamshi and R.N. Swamy "Curing/Environment effect on pore structure of blended cement concrete," journal of materials in civil engineering (ASCE) september 2001.
- [6] Taewan Kim & Kevin L. Rens, "concrete maturity method using variable temperature curing for Normal-strength concrete mixes," journal of materials in civil engineering (ASCE)0899-1561(2008)20:12(735).



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)