



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 5      Issue: VIII      Month of publication: August 2017**

**DOI: <http://doi.org/10.22214/ijraset.2017.8054>**

**[www.ijraset.com](http://www.ijraset.com)**

**Call:  08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# Enhancing Spectrum Utilization using GA in WCDMA

Neha<sup>1</sup>, Neetu Verma<sup>2</sup>

<sup>1</sup>M. Tech Scholar, CSE Dept DCRUST Murthal, India

<sup>2</sup>Assistant professor, CSE Dept DCRUST Murthal, India

**Abstract:** This paper describes the upcoming systems with to execute ever-healthy demand for ahead data rates, and to license numerous users to approach the web simultaneously, curiosity has pointed in what has come to be famous as WCDMA. Modern digital communications systems require point-to-point presentation activity. The cause that measures this presentation is normally BER. The Bit error rate is the magnitude of bit errors separate by the entire sum of movement bits during a designed time distance. BER is a without unit presentation measure frequently announced as a proportion. We have finished the execution and investigation of these modulation techniques when the scheme is theme to GA for multiuser sensing and AWGN with fading and RF in the communication transmission. Bit error rate presentation of various modulation method are analyzed. There are many optimization techniques used for improve BER and find which one is better than among them and why. Simulation is carried out on the software named MATLAB.

**Keywords:** WCDMA, Optimization techniques, BER etc.

## I. INTRODUCTION

Those BER might make broke down utilizing stochastic PC reenactments. Whether An basic transmission channel model Furthermore information wellspring model is assumed, the BER might additionally a chance to be ascertained analytically[1]. An ex. of like a information origin theory is the Bernoulli origin.

Eg of like easy transmission models are [2]:

Binary symmetric transmission .

AWGN transmission without fading. An Most exceedingly bad instance situation may be a totally irregular channel, the place commotion completely dominates through the helpful indicator. This result in a sending bit error rate of 50% [3]. In a noisy transmission, The bit error rate may be often communicated Concerning illustration An capacity of the normalized carrier-to-interference proportion measure indicated  $E_b/N_0$ , or  $E_s/N_0$  [4] Like, on account for QPSK regulation & AWGN transmission. , the bit error rate as purpose of the  $E_b/N_0$  is granted by:  $BER = 1 / 2\text{erfc}(E_b / N_0 / \text{sqrt}(2))$ .

Measuring the bit error rate aides us choose the suitability ahead lapse revision FEC codes. Since fewest such codes right best bit-flips, However not bit-addition or bit-remove, The hamming separation metric may be the suitability approach with measure the measure from claiming touch errors.

## II. FACTORS AFFECTING BER

Those recipient side bit error rate might be influenced by sending passage distortion, spot synchronization problems, noise, interference, remote multipath fading, attenuation, and so forth throughout this way, observing and stock arrangement of all instrumentation may be enha. To a correspondence framework. [6]. The BER might a chance to be exceptional by selecting a capable sign quality , By selecting a moderate Also strong regulation system alternately accordance coding strategy.

The information BER, roughly equivalent to the decryption fault chance, is the amount of decoded bits that rest erroneous after the fault correction, apart by the whole amount of decoded bits . Usually the sending bit error rate is bigger than the data bit error rate. The data bit error rate is affected by the property of the FEC code.

## III. VARIOUS TECHNIQUES ARE USED TO IMPROVE BER PERFORMANCE

### A. Genetic algorithm

According to [7], PSO & GA both are the high-grade population search method. Genetic Algo. optimization method has been utilized by a no. of seeker to search the best surface harshness in different conventional and current machining [9][10][11]. An summary of Genetic Algo. method to modify the surface harshness in milling procedure & past activity of device optimizing difficulty for surface harshness can be found [12].

The GA based on the concept that the activity of happening of an single is its fitness i.e. “survival of fittest”. It states that those good mix from claiming genes and their coming about chromosomes yields those powerful single, which will endure the extended. Therefore,GA will be versatile heulandite look dependent upon evolutionary ideas. Genetic algorithms are typically used as a performing of difficulty optimization and due to its unselected nature, fast convergence time and quality to spontaneously create incomparable solutions. Thus, genetic algorithms are an attractive candidate for cognitive radios. Genetic algorithms are used mainly when the find space is too big to be merely brute force search to find the best factor. Pros of GA over conventional algo are Procedure simplicity management capability. It deals with all objective functions whether they are nonmoving or transient, continuous or discontinuous.

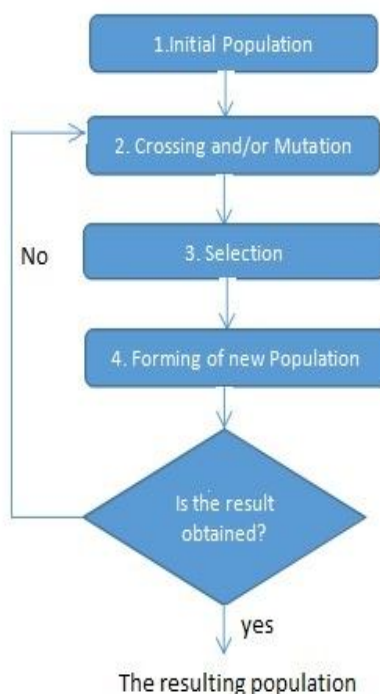


Fig 2: Flow chart of gentic algorithm

Figure 1: GA based CDMA system model

1) *Flow of GA*; The GA aided lookup can be ended, if there are no further modify in the peak fitness amount after various sequential generations. In this case time needed for Genetic algo to reach a judgment is unsure. If the structure of the lookup space is time-invariant, then it is possible to set a threshold, such that the Genetic algo aided search is ended, once the fitness amount of an individual is found to pass this threshold. Unluckily neither of these ending criteria can be applied to Genetic algo aided CDMA multi-user sensing, since typically a fixed execution complexness is also needed and also the search space is time variable due to noise and fading obligatory by the transmission. Hence in this utilization we have ended the Genetic algo aided search at the 8th generation and the individual connected with the full fitness aided search at the 8th generation and the individual connected with the advanced fitness value at this point will be sensed solution. By specifying the perfect magnitude of generation, the procedure complexity of Genetic algo can be decreased.

**B. Ant colony optimization**

Ant colony optimization algo was divine by the action of the ants in inquiring of their food origin. The primary thought of ant scheme is present by Marco Dorigo in 1992. The ant activity for the foods and evaluates the food origin and take it back to the mob in ACO . The ant then leaves a portion named secretion as their motion back to the mob. The amount of secretion collective, which may trust on the amount and choice of the food, will escort other ants to the food origin [13]. The other ants tend to follow the way where secretion property is high.

Ant colony optimization metaheuristics is one such method that is supported on the combined forage scheme of real ants. In this formulation, various unreal ants execute a series of transaction repetitive. Within all iteration, various ants search in comparable for good mixture in the mixture location. One or many ants are allowed to kill a change repetitive, going behind a secretion proceeding for others to follow. An ant hint out a individual way, probabilistically pick out only one component at a time, until an whole mixture variable is acquire.

New ACO technique to solve the OMD difficulty in DS-CDMA scheme. The thought is to use unreal ants to keep path of likely region of the find area by laying trails of secretion which escort the find of the ACO, as a heuristic for select belief to be allotted to changeable. An effectual general find is performed after all time period of the ACO to modify the choice of mixture. Simulation consequence display the projected ACO multiuser sensing strategy concerted with general find can approach very rapidly to the best result. The BER execution of the projected algo is stop to the OMD bound for big scale DS-CDMA scheme and the procedure quality is multinomial in the no. of progressive clients.

**C. Simulated Annealing**

Simulated Annealing improvement method is founded on unselected no.s for the assessment of the objective role that provide planetary best result [14]. simulated annealing was proposed [15] to discovery the best international expenditure utility that may have various general optima [16]. SA method simulate the process of bit-by-bit chilling of metals in universe. Compared to other planetary improvement like as TS and GA, Simulated Annealing is simpler to set into pattern & supply great result for more combinatory difficulty. The factor of modular SA consider first temp. and decrease cause. [17], the seeker engaged SA method to perfect process factor of automatic type modern machining and the outcome display that simulated annealing execute the genetic algorithm method.

we let us the difficulty of the associated design of many sender and acquire in a MIMO OFDM scene. We let us that all the sender and acquire have many aerial,configuring a MIMO transmission. Supported on this construction, space diversity method can be used to apart the signals sent by various clients. Concretely, the projected coming exist in beamforming at both sides of the scheme, combined with the OFDM modulation. The aim is the reduction of the total sent power subject to constraints related to the QoS for all clients in terms of the BER and the max sent power for few end point. By making use of this method, the MAI is minimized and the physical resources are employed in an best path. The design is supported on SA, an heuristic method able to find the best design in this non-convex difficulty and that can take into account all kind of constraints.

We simulate an uplink channel with 3 MTs and 1BS.The Orthogonal frequency-division multiplexing modulation exist of 16 carriers and all the MTs and Base Station have 5 aerial. The Quality of Service restraint in status of the average uncoded effectual bit error rate are: 10-3, 10-3 and 10-2 for all client, and  $\alpha=100$ . For each the fig given in this area we display the activity of the method vs the no. of “flops” in MATLAB, so that we can comparison the algo straight on a procedure load base. In the initial stage we let us that the way loss is very fair for each the clients.

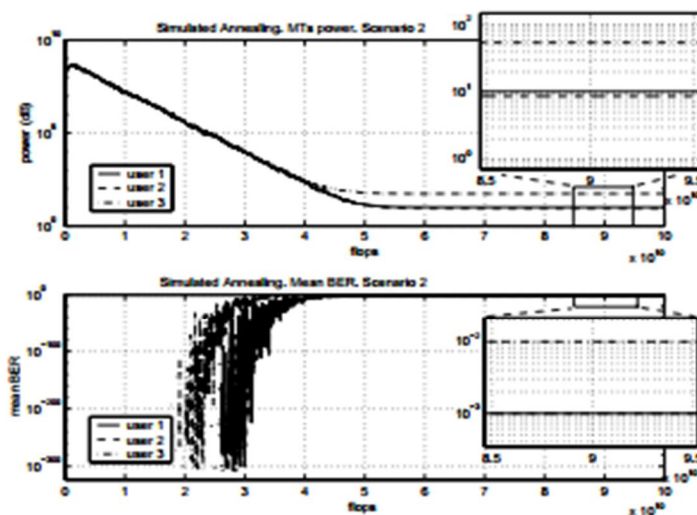


Fig. 4. Performance of the Simulated Annealing algorithm in scenario 2.

#### IV. PCO & BCO

PSO method was present by Eberhart and Kennedy(1995) to figureout nonstop optimization difficulty[18].The swarm is combined of measureless material with stochastic speed, all of which shows a executable mixture. The algo search the best result through moving the material in the result space.

Cognitive radio has been acknowledged as an mixture to difficulty of restricted spectrum in wireless connection.The BER of alternate clients in Cognitive radio scheme has been decreased using the Biography-based optimization and Particle swarm optimization method by increasing the channel gains. For all alternate sender aerial, the transmission gain for secondary to primary link and secondary to secondary link is optimized and the information is conveyed from an aerial using forced difference selection performing, showing max gain. Other than selection of aerial, another constraint for the optimization is the convey power for secondary client. The BER has been developed for different belief of SNR over which the sending took place. It is evidenced from the simulation outcome that the mean BER has been decreased by 8.571% and 5.229% with BBO and PSO respectively. It has been shown that BBO and PSO have a trade off between decrease of mean SNR and Time elapsed. BBO takes 0.048169 seconds for computing whereas PSO does the identical in 0.036195 seconds. At last, applied utilize of both method are discussed.

1) *Biography Based Optimization*: BBO is supported on the development and movement of new species [23]. All island has its own habitat suitability index (HSI). The HSI rely upon different cause such as weather, temperature, atmosphere and others [27]. An island having broad quantity of HSI has much amount of species living on it. Species migrate from their host island to other because of the big no. of population due to other species. An island with broad HSI has broad emigration rate and low immigration rate. lly species life on an island with low HSI immigrate to other island with broad HSI in lookup of best destiny to increase [27]. So an island with low HSI has advanced immigration rate and low emigration rate. After a predefined no. of repeat, the good resultant island is let us as the best result for granted fitness function [28].

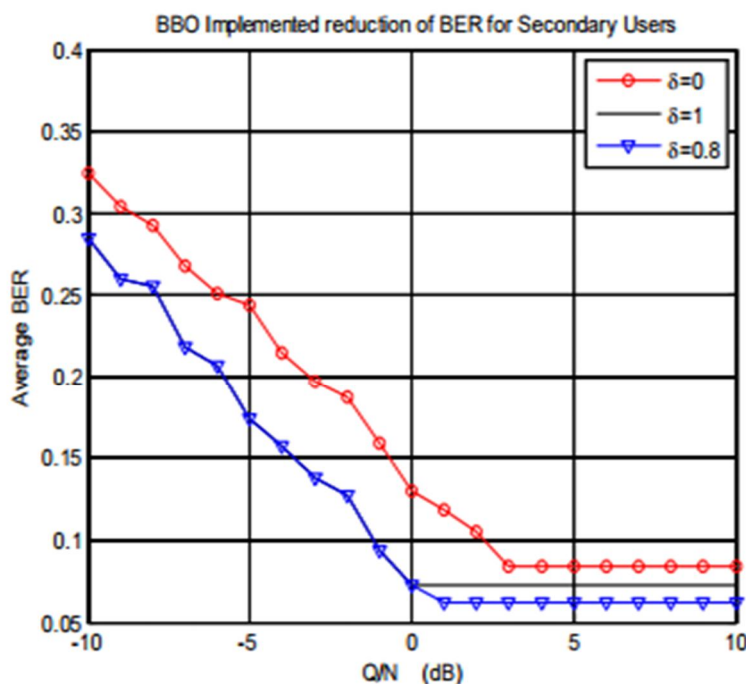


Fig-5: Average BER versus SNR for different values of Difference selection weight using BBO

2) *PSO*: The Particle Swarm Optimization is a method to modify a difficulty by procedure and refinement the someone result repetitive for a special ff in whatever domain [24]. The first population is taken within the reserved search space for mixture which is formed reported to the difficulty in hand. The prospect mixture or swarm particles motion in the activity space with their consequent speed [29]. The consequent speed is a vectored collection of the material's past point, material's past good position and swarm's good position [30]. With all iteration, the swarm's good position is updated which leads to the optimized consequent result for the granted fitness function [28].

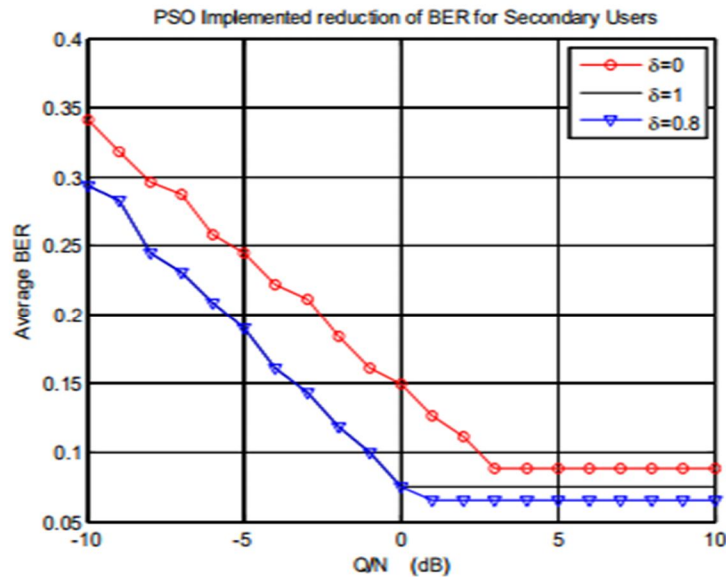


Fig-6: Average BER versus SNR for different values of Difference selection weight using PSO

From the acquire outcome, it can be ended that the mean BER has been decreased with both proposed algo of optimization. For BBO, the BER has been decreased by an mean cost of 8.571% in an mean time interval of 0.048169 seconds whereas in case of PSO, the BER has reduced up to an mean value of 5.229% in mean time of 0.036195 seconds. It seems there survive a tradeoff between the two factor. For any utilization in CR scheme both the BER and Time elapsed are essential cause. So in a CR scheme where information efficiency has broad importance like military utilization, BBO will be favored because of its good execution in reducing BER. Similarly in scheme like vehicular system, where time has full importance over BER, PSO performing is more likely to apply.


Table-3: Performance comparison for various Optimization methods

Optimization Technique	Average Reduced BER (%)	Average Time Elapsed (s)
BBO	8.571	0.048169
PSO	5.229	0.036195

### V. ABC

Artificial bee colony optimization is the modern swarm-based algo that mimics the foraging action of swarm honey bee. Similar to the idea of PSO and ACO, this expedition algo is able of drawing best choice of result. Artificial bee colony optimization is best at expedition but pitiful in development as engaged bees and onlooker bees only change a little portion of the mixture instead of taking the global good, which may lead to the trapping of the ABC in local minima [48]. In command to keep a neat scale between exploration and exploitation, several different of ABC namely GABC [50], I-ABC [48] and PS-ABC [48] were proposed by seeker.

Numbers of researches in machining optimization using various evolutionary techniques (2007 - 2011)

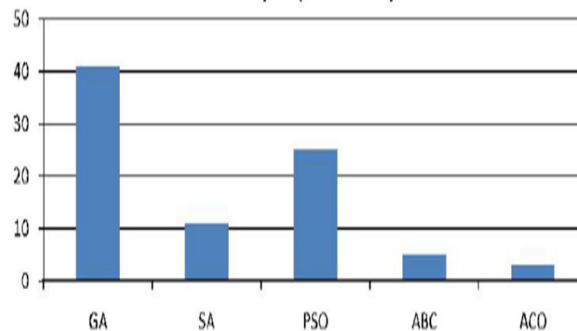

## VI. CONCLUSION

After simulation in MATLAB for various optimization technique Genetic algorithm provide great solution to Bit Error Rate (BER). Simulation on various modulation in MATLAB can lessen BER to an capable level. Using GA also we modify the BER hence enhanced the spectral utilization by reduce the interference and SNR with OFDM technique in WCDMA system.

## VII. FUTURE WORK

With the over utilization of electronics applications day by day the spectrum utilization is become important. So proper usage of frequency spectrum some parameters are also considered in future such as proper power allocation, data rate, frequency bands.

## REFERENCES

- [1] W. Liang and S. Zhijie, "Study on Broadband Adaptive Beamforming Method for Smart Antenna," 6<sup>th</sup> international Conference on Wireless Communications Networking and Mobile Computing (WiCOM), Chengdu City- China, pp. 1-4, September 2010.
- [2] CDG-CDMA Development Group. [Online]. Available: <http://www.cdg.org/technology/cdmatechnology.asp>
- [3] Fuzzy logic toolbox: MATLAB7.0.1, The Math works, Inc. 1994-2005.
- [4] Maninder Jeet Kaur, Moin Uddin, Harsh K.Verma, "Performance Evaluation of QoS parameters in cognitive radio using Genetic Algorithms", In World Academy of Science, Engineering & Technology, vol.4, No.10, pp.830- 835, 2010.
- [5] Nan Zhao, Shuying Li, Zhilu Wu, " cognitive radio engine design based on Ant colony optimization", Wireless pers communication, 2012.
- [6] Kiranjot kaur, Munish Rattan, Manjeet Singh Patterh, "optimization of cognitive radio system using simulated annealing", wireless pers communication, 2013.
- [7] Ganesan, H., Mohankumar, G., Ganesan, K., & Ramesh Kumar, K. (2011). Optimization of machining parameters in turning process using genetic algorithm and particle swarm optimization with experimental verification. International Journal of Engineering Science and Technology (IJEST), 3, 1091–1102
- [8] Pasam, V. K., Battula, S. B., Valli, P. M., & Swapna, M. (2010). Optimizing surface finish in WEDM using the Taguchi parameter design method. Journal of the Brazilian Society of Mechanical Sciences and Engineering, 32(2), 107–113
- [9] Zain, A. M., Haron, H., & Sharif, S. (2010a). Application of GA to optimize cutting conditions for minimizing surface roughness in end milling machining process. Expert System with Applications, 37, 4650–4659
- [10] Zain, A. M., Haron, H., & Sharif, S. (2011a). Genetic Algorithm and Simulated Annealing to estimate optimal process parameters of the abrasive waterjet machining. Engineering with Computers, 27(3), 251–259
- [11] Wang, Z. H., Yuan, J. T., Hu, X. Q., & Dengn, W. (2009). Surface roughness prediction and cutting parameters optimization in high-speed milling AlMn1Cu using regression and genetic algorithm. In International Conference on Measuring Technology and Mechatronics Automation (vol. 3, pp. 334–337)
- [12] Zain, A. M., Haron, H., & Sharif, S. (2008). An overview of GA technique for surface roughness optimization in milling process. Paper presented at the Proceedings - International Symposium on Information Technology 2008, ITSIm, 3
- [13] Dorigo, M., & Blum, C. (2005). Ant colony optimization theory: A survey. Theoretical Computer Science, 344(2–3), 243–278
- [14] Bharathi, R. S., & Baskar, N. (2010). Optimization techniques for machining operations: A retrospective research based on various mathematical models. International Journal of Advanced Manufacturing Technology, 48(9–12), 1075–1090
- [15] Kirkpatrick, S., Gelatt, C. D., Jr., & Vecchi, M. P. (1983). Optimization by simulated annealing. Science, 220(4598), 671–680.
- [16] Bertsimas, D., & Tsitsiklis, J. N. (1993). Simulated Annealing. Statistical Science, 8(1), 10–15.
- [17] .Rao, R. V., Pawar, P. J., & Davim, J. P. (2010b). Optimisation of process parameters of mechanical type advanced machining processes using a simulated annealing algorithm. International Journal of Materials and Product Technology, 37(1–2), 83–101
- [18] Zhao, H., Li, J. G., Yao, Y. X., & Liu, C. Q. (2008). Cutting parameters optimization for constant cutting force in milling. Applied Mechanics and Materials, 10–12, 483.
- [19] X. Kang, Y. C. liang, H. K. Garg and L. Zhang, "Sensing-Based Spectrum Sharing in Cognative Radio Networks," IEEE Transactions on Vehicular Technology, vol. 58, no. 8, pp. 4649-4654, 2009
- [20] Y. Wang and J. P. Coon, "BER minimization for cognitive radio systems with difference antenna selection," in IEEE Pacific RimConference on Communication, Computers and Signal Processing, pp. 304-309, 2011.

- [21] H. Wang, J. Lee, S. Kim and D. Hong, "Capacity enhancement of secondary links through spatial diversity in spectrum sharing," *IEEE Transactions on Wireless Communications*, vol. 9, no. 2, pp. 494-499, 2010.
- [22] Y. Wang and J. Coon, "Difference antenna selection and power allocation for wireless cognitive systems" Arxiv preprint arXiv: 1010.0200, 2010. [Online]. \
- [23] D. Simon, "Biography-based optimization," *IEEE Transactions on Evolutionary Computation*, Vol. 12, pp. 702-713, Dec 2008.
- [24] X. Hu, Y. Shi and R. Eberhart, "Recent advances in Particle Swarm," *Evolutionary Computation*, 2004. EC2004. Vol. 1, pp. 90-97, 2004.
- [25] I.F. Akyildiz, W. Y. Lee, M. C. Vuran, and S. Mohant, "Next generation dynamic spectrum access/cognitive radio wireless networks: a survey," *Comput.Networks* 50(13), pp. 2127-2159, 2006.
- [26] M. Ergezer, Du Dawei, D. Simon and R. Rarick, "Markov Models for Biogeography-Based Optimization," *IEEE Transactions on Systems, Man, and Cybernetics*, Volume 41, Issue 1, pp. 299-306, 2011
- [27] S. Singh, S. Shivangna, ; E. Mittal, "Range Based Wireless Sensor Node Localization Using PSO and BBO and Its Variants," *International Conference on Communication Systems and Network Technologies (CSNT)*, Page 309-315, 2013.
- [28] Ma Haiping, Lin Shengdong, Baogen Jin, "Oppositional Particle Swarm Optimization Algorithm and Its Application to Fault Monitor," *Chinese Conference on Pattern Recognition, (CCPR 2009)*, pp. 1-5, 2009.
- [29] Qinghai Bai, "Analysis of Particle Swarm Optimization Algorithm," *Journal of computer and information science*, vol. 3, No.1, pp. 180-184, Feb 20
- [30] Abdelfatah Elarfaoui, Noureddine Elalami, "optimization of QOS parameters in cognitive radio using combination of two crossover methods in genetic algorithm", *Int. J. Communications, network and system sciences*, pp. 478- 483, November 201
- [31] Ismail AlQerm and Basem Shihada, "Adaptive multiobjective optimization scheme for cognitive radio resource management", *Globecom 201*
- [32] Seshadri Binaya Behera, D.D.Seth, "Resource allocation for cognitive radio network using particle swarm optimization", *IEEE sponsored 2<sup>nd</sup> international conference on electronics and communication system (ICECS „2015“*
- [33] Akay, B., & Karaboga, D. (2010). Artificial bee colony algorithm for large-scale problems and engineering design optimization. Retrieved from <http://www.springerlink.com/index/10.1007/s10845-010-0393-4>
- [34] Alam, S., Nurul Amin, A. K. M., Patwari, A. U., & Konneh, M. (2010). Prediction and investigation of surface response in high speed end milling of ti-6Al-4V and optimization by genetic algorithm. *Advanced Materials Research*, 1009–101
- [35] Benala, T., Jampala, S., Villa, S., & Konathala, B. (2009). A novel approach to image edge enhancement using Artificial Bee Colony optimization algorithm for hy
- [36] bridized smoothening filters. *Nature & Biologically Inspired Computing* (pp. 1071–1076). NaBIC 2009. World Congres Bharathi, R. S., & Baskar, N. (2011). Particle swarm optimization technique for determining optimal machining parameters of different work piece materials in turning operation. *International Journal of Advanced Manufacturing Technology*, 54(5–8), 445–463
- [37] Brand, M., Masuda, M., Wehner, N., & Yu, X. H. (2010). Ant colony optimization algorithm for robot path planning. *2010 International Conference on Computer Design and Applications (ICDA 2010)*, vol. 3 (pp. 436–440
- [38] D. Jeya Mala, V. Mohan, and M. Kamalapriya, "Automated software test optimisation framework – an artificial bee colony optimisation-based approach," *IET Software*, Vol. 4, No. 5, 2010, pp. 334–348
- [39] G. Zhu and S. Kwong, "Gbest-guided artificial bee colony algorithm for numerical function optimization," *Applied Mathematics and Computation*, Vol. 217, No. 7, 2010, pp. 3166–3173
- [40] Dong In Kim, Long Le, Hossain, E., "Resource Allocation for Cognitive Radios in Dynamic Spectrum Access Environment," *Cognitive Radio Oriented Wireless Networks and Communications*, vol. 1, pp. 1-6, 200
- [41] J. G. Proakis, *Digital Communication*. Fourth Edition, New York, NY: McGraw-Hill, 2001.





10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)