



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 9      Issue: V      Month of publication: May 2021**

**DOI: <https://doi.org/10.22214/ijraset.2021.34687>**

**[www.ijraset.com](http://www.ijraset.com)**

**Call:  08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# Skin Disease Detection and Classification using Image Processing & Machine Learning Technique

S. K. Uma<sup>1</sup>, Yogananda M. C.<sup>2</sup>

<sup>1</sup>Associate Professor, Computer Science and Engineering, P.E.S College of Engineering, Mandya, India

<sup>2</sup>PG Scholar, Computer Science and Engineering, P.E.S College of Engineering, Mandya, India

**Abstract:** Humanoid membrane stays the major organ in our physique which be responsible for fortification in contradiction of hotness, sunlit, contagions as well as injury. The aforementioned too provisions water, fat, as well as vitamin. Malignance is progressively documented by way of a grave communal vigor problematic vogueish Ethiopia. Here stand three kind of skin-cancer remain Basal cubicle carcinoma, Melanoma as well as squamous cell-carcinoma. They stay predictable grounded scheduled their peculiar possessions. Cutting-edge interpretation of a digital image processing technique is future to identify as well as envisage the dissimilar kinds of skin-cancers by digital image processing techniques. This paper proposes a novel method for automatically classifying skin cancer images using texture and colour data. Median filtering is used to remove undesirable noises from the skin image. Gray level co-occurrence matrix and colour characteristics are retrieved in the next stage. Finally, k-nearest neighbor, support vector machine are used to classify the skin cancer images. The classification system was monitored and corresponded to predetermined classes of skin cancer types. Combining Self organizing map and radial basis function for recognition and diagnosis of skin cancer is by far better than K - Nearest Neighbors (KNN), Gray Level Co-Occurrence Matrix (GLCM) and Multi-SVM classifier. It was also discovered that morphology and colour features had stronger discrimination power than texture features, but that when morphology, texture, and colour features were employed together, classification accuracy was improved. The best classification accuracy (88.39%, 96.15% and 95.45% for Basal cell carcinoma, Melanoma and Squamous cell carcinoma respectively) were obtained using combining SOM and RBF. The overall classification accuracy was 93.33%.

**Index terms:** Image segmentation, k-means, clustering, Region of interest (ROI), texture features, Basal cell carcinoma, Melanoma.

## I. INTRODUCTION

The prime structure of the physique is skin. Skin reins the malaise of the physique as well as vittles obese, water as well as vitamin-D. Skin safeguards us in contradiction of the sunshine, warmth, wound also contagion. Skin which comprise numerous films, nevertheless the binary chief films remain the upper or else first film epi-dermis as well as the inferior or internal layer dermis. Skin entails of three dissimilar kinds of cubicles. Here is squamous-cell, melanocytes and basal-cell. The diverse cubicles stay contemporary scheduled the cuticle film. The chief film of the epi-dermis thru active of squamous-cells, the cubicle remains a reedy as well as flat-cell. The central-part of the squamous cubicle sojourns basal cubicle; the cubicle remains a rotund cubicle. The subordinate fragment of epi-dermis film remains melanocytes cubicles, which create melanin. Melanin stands the tincture that provides skin the usual color. Subsequently skin remains open towards the sunlight, melanocytes create supplementary color. It grounds skin to obscure.

Skin malignance stays hurriedly cumulative cutting-edge the world-wide. Existence percentage of skin malignance is in elevation, stipulation the situation stays noticed initial phase. So, an well-organized technique is essential to notice skin abrasion by the most primitive. The price of dermatoid constraint image for broadcast the persistent is in elevation. The focal goal of skin-cancer discovery structure remains to decrease the proportion of mistake through selecting the suitable technique in every phase. graphic examination is inadequate through humanoid filmic aptitude, by way of thriving as per humanoid insight besides compassion, in tally toward the detail that the not all together malignances consume the similar physiognomies. A lump canister remain definite by tactic of an unexpected enlargement or evolution of humanoid cubicle that cultivates vogueish an unhindered, which canister remain recognized through the disparity of color, consistency of the humanoid matters. Consistencies remain graphic designs, which partake illumination, color, grade, magnitude besides former characteristics. Once segregated using on sub-images through areas of attention, they remain competent towards be accurately hush-hush. color is unique of the substantial structures cutting-edge the inspection of skin graze. The dispersal of consistency besides pigment structures benevolences substantial info.

Dermo-scopy methods remain established aimed at attaining the vibrant skin graze advert which in seizure the pictorial consequence remains improved through eliminating echo. But involuntary appreciation of skin graze consumes an insufficient problematic chore such by way of relics, low-contrast, skin pigment, curls, veins as well as analogous graphic of malignance besides non-melanoma. All together this container remain abridged through pre-processing methods. The pre-processed membrane graze appearance stands segmented rummage-sale toward acquire the precise locus of the skin graze. Here remain numerous approaches for separation methods such by way of wavelet procedure, rudimentary worldwide thresholding, province grounded dissection, crisis procedure, serpents technique, Otsu technique, vigorous delineations, also geodesic vigorous delineations etc. Integration is achieved by means of geodesic vigorous silhouette.

## II. LITERATURE REVIEW

In vindictiveness of resistance as well as obstacle purpose, skin remains not imperishable hip that skin inclines towards be persistently inclined through a diversity of peripheral also inherited aspects. Presently, here remain three chief kinds of membrane illnesses seeming in humanoid body, together by epidemiologic skin illnesses, fungoid skin infections, as well as averse skin infection. Regardless of the datum the kinds of skin infections be able to be healed at contemporary, these illnesses undeniably devour conveyed distress towards patients' lifespan [1].

These days, the mainstream of deductions scheduled the patients' prevailing signs remain strained mostly grounded on surgeons' existences of practice or else their individual idiosyncratic rulings, which may perhaps clue to oversights besides thus interruption the usage of these. Consequently, the situation remains of prodigious theoretic implication besides concrete rate to revision in what way to excerpt symptoms of miscellaneous skin illnesses taking place the origin of contemporary discipline besides expertise. Below this condition, operative as well as precise empathy of the kinds of skin infections be able to be attained to recommend action rendering to patients' signs [2].

In excess of the previous insufficient eons, the appearance dispensation method consumes attained prompt growth in medication. Certain apparatus grounded off digital appearance expertise consumes likewise remained extensively practical to publics' routine life, aimed at illustration, computed-tomography (CT), digital-subtraction-angiography (DSA), besides magnetic-resonance-imaging (MRI).

Unfathomable investigation taking place this way consumes remained approved obtainable by intellectuals all together in excess of world. Aimed at instance skin illness varicella remained noticed by Oyola as well as Arroyo [3], concluded image-processing method's pigment conversion, equalization by way of thriving as edge discovery, also the appearance of varicella remained ultimately calm as well as categorized finished Hough-transform. The concluding experiential consequences established that an improved analysis remained conventional in rapports of recognition taking place varicella, also initial examination remained too accompanied going on varicella besides herpes-zoster taking place that origin. Shapiro & Chung [4] placed onward a technique to notice the appearance of crust grazes grounded scheduled partial-differential-equation (PDE), thru which a delineation typical of membrane grazes remained excavated scheduled the foundation of this unique morphological clarifying finished PDE. The concluding pragmatic consequences established that skin illnesses might be precisely recognized concluded by this algorithm.

## III. MAJOR TERM USED

### A. Computer Vision

Computer-vision vestiges an inter-disciplinary precise turf that pacts by what means computers canister be complete to expansion high-level empathetic after digital imageries or videos. After the viewpoint of engineering, the aforementioned pursues to program errands that the humanoid visual system can do. Processer delirium errands comprise approaches for obtaining, dispensation, examining as well as sympathetic digital imageries, likewise withdrawal of high-dimensional information as of the existent world hip edict to crop arithmetical or representational info, e.g. vogueish the trials of choices. Empathetic in this set resources the alteration of visual imageries (input of retina) hooked taking place imageries of the world canister edge by additional rumored procedures besides stimulate applicable act. This appearance sympathetic canister be understood by way of the unravelling of representative info after appearance figures by replicas erected by the assistance of geometry, statistics as well as physics & learning theory. The precise persuasion of computer apparition is fretful by the philosophy behindhand artificial-systems that excerpt info commencing imageries. The appearance facts canister yield numerous procedures, such by way of audiovisual orders, opinions after numerous cameras, before multi-dimensional documents after a medicinal scanner. The technical persuasion of computer visualization pursues to smear its philosophies then replicas toward the edifice of computer visualization systems.

**B. Image-segmentation**

In computer-vision, appearance dissection is the procedure of apportioning a digital appearance hooked on multiple sections. The objective of integration is to streamline besides alteration the illustration of an appearance hooked on somewhat that is additional expressive besides calmer to examine. Image integration is usually castoff to find substances limitations in imageries. Further exactly, image integration is the procedure of transmission a tag to each pixel hip an appearance such that the pixels through the similar label portion assured appearances.

The consequence of image integration is a usual of fragments that together concealment the all-inclusive image, before a regular of outlines mined after the appearance. Apiece of pixels hip a expanse are alike by reverence to certain typical or calculated possessions, such as per intensity, color or consistency. Contiguous areas remain ominously dissimilar by deference towards the similar distinctive. Once practical to a heap of imageries, characteristic in medicinal imaging, the resulting contours after image segmentation can be rummage-sale to fashion 3D renovations by the assistance of interruption processes similar filing chops.

**IV. PROPOSED METHODOLOGY**

The chore of recognition transpires in widespread assortment of humanoid commotion. The delinquent of gratitude is anxious by the erection of a process that resolve be realistic to distinguish substances, hip which all novel piece obligation be dispersed to unique of a customary of predefined modules on the base of pragmatic traits or structures. Consequently, image examination otherwise computer visualization is rummage-sale in the gratitude of humanoid skin malignance to predefined curricula. These perceived structures of skin-cancer remained castoff to elect the class or the kind of skin-cancer. Voguish the suggested structure the key attention is to distinguish the kind of skin-cancer diversities by image examination method this is for of in instruction to exploit the curability of the illness if we classify the kind of skin-cancer anywhere it have its place to it is precise unpretentious to treatment the illness else it is problematic.

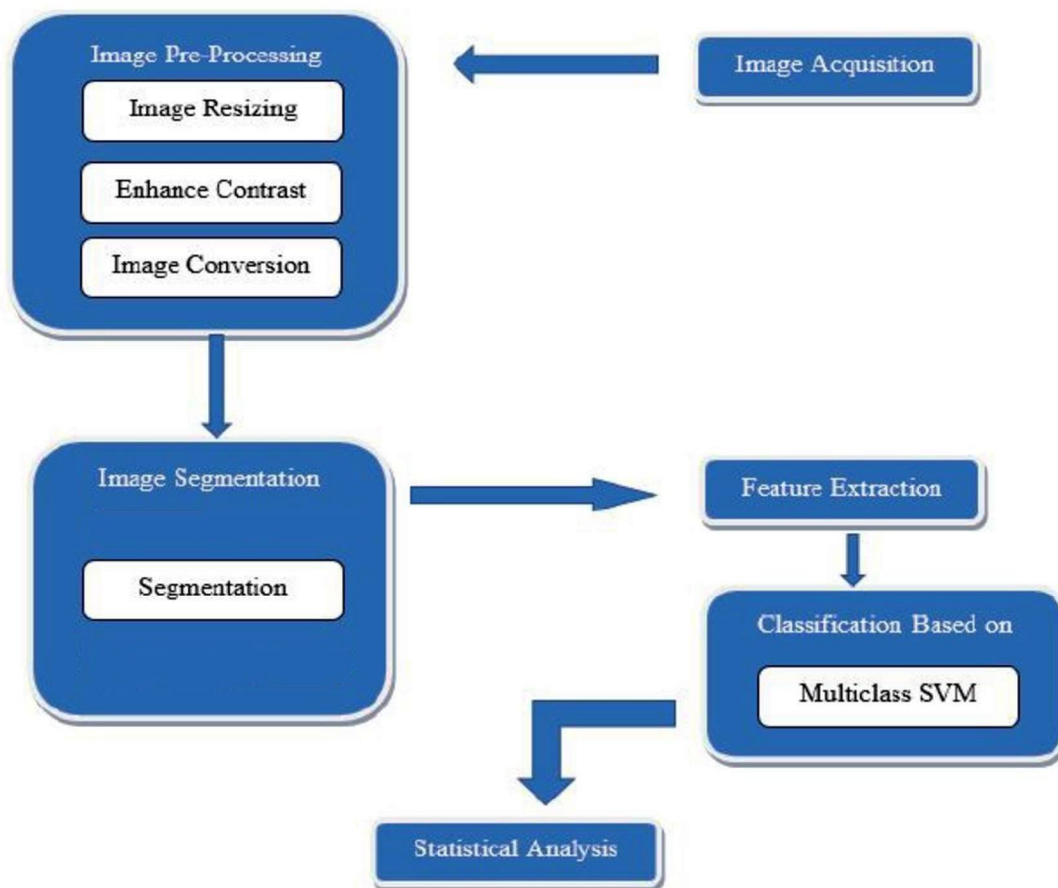


Figure 1. Proposed System Block Diagram.

As revealed in the overhead figure, cataloguing of humanoid skin cancer includes the subsequent doings:

- A. Image gaining of humanoid skin-cancer, an image dispensation methods is practical taking place the assimilated image to improve the excellence of image consequently as to diminish noises.
- B. Suitable piece are removed after the improved image thru by image examination methods that is cast-off to categorize dermoscopy imageries of skin-cancer.
- C. The cataloguing exemplary of exercise and challenging information of dermo-scopy imageries of skin-cancer will be established.
- D. Lastly appropriate configuration classifiers remain designated to categorize dermoscopy imageries of skin-cancer to the predefined curricula of skin-cancer.

The chief phase of our preset image examination system is image gaining. We consume collected skin-cancer imageries since internet as well as medical fount. This phase is vital for the respite of the structure; henceforth, if image is not assimilated fittingly, formerly the residual constituents of the system might not be attainable, before the consequences will not be sensible. In this phase chief appearance scheme necessitates the resized appearance aimed at the enhanced consequences. Input appearance assumed towards the scheme is in RGB procedure. Nevertheless for our anticipated structure necessitates gray imageries. Henceforth by rgb to gray change in MATLAB we transfigure RGB imageries hip to gray imageries.

We usage a progressive division method recognized as k-means-segmentation. The method suggested now remains a well-trained net by dissimilar appearance designs, which allows us towards ensure the dissection in a improved as well as precise method. The algorithm stretches us obligatory amount of collection which assistances us to distinguish between different expanses of test appearance.

The suggested K-Means integration procedure fragments the test-image hooked on 3 constellation specifically, the contextual, and skin layer also the infection film. The operator requirements to indicate the constellation with the illness portion of the skin, which determination be selected for additional procedure of the algorithm. Piece removal is the technique by which exclusive structures of skin graze imageries are removed. This technique diminishes the intricacy in organization glitches.

The determination of piece removal is to diminish the unique information usual by gaging convinced possessions, or sorts, that differentiate one contribution outline after additional. We consume the subsequent structures abstraction steps:

GLCM (Consistency structures of skin-cancer): GLCM is a powerful-tool aimed at appearance piece insertion by registering the grey-level co-occurrence prospects grounded on three-dimensional associations of pixels in dissimilar gaunt instructions.

Morphological structures: Morphology remains the regular possessions of an assumed appearance, in our circumstance it remains the size as well as shape features of human skin-cancer image.

Arithmetic examination of skin appearance is imaginary to stretch dissimilar figures such as: correlation factor, Entropy, Texture factor, Standard deviation, contingent scheduled this stricture chief discovery available here variety for discrete skin infection. To catch out variety of these limits rummage-sale for customary skin infection appearance databank.

GLCM (Gray Level Co-occurrence Matrix) Structures:

Waged of GLCM: GLCM consistency reflects the relative amid two neighboring-pixels in unique equipoise, by way of the second instruction consistency. The gray assessment relations in a objective are distorted hooked on the co-occurrence milieu interplanetary by a particular kernel disguise such as 3x3, 5x5, 7x7 besides so onwards. In the alteration after the appearance interplanetary hooked on the co-occurrence milieu interplanetary, the adjacent pixels cutting-edge one or certain of eight distinct guidelines container be rummage-sale; usually, four way such as 0°, 45°, 135°, 90°, besides is originally stared, also its contrary way (negative direction) canister too be tallied into justification. It comprises info round the situations of the pixels consuming alike gray-level values. Every component (i, j) in GLCM stipulates the integer of periods that pixel by assessment i happened vertically together to a pixel by value j, reckoning has remained complete in the way anywhere, component (1, 1) in the GLCM covers value 1 since here is solitary one illustration in the appearance anywhere two, vertically contiguous pixels consume values 1 besides 1. Component (1, 2) hip the GLCM comprises the value 2 as here remain two illustrations cutting-edge image anywhere two, straight contiguous pixels partake the values 1 to 2. Component (1, 2) in the GLCM comprises value 2 since here are two example in the appearance anywhere two, straight contiguous pixels partake the values 1 and 2. The GLCM milieu has remained mined for input dataset images. When subsequently the GLCM is calculated, consistency structures of the image remain existence removed consecutively.

| Sl.No | GLCM Feature       | Formula   |
|-------|--------------------|---|
| 1.    | Contrast           | $\sum_{i,j=0}^{N-1} P_{i,j} (i - j)^2$  |
| 2.    | Correlation        | $\sum_{i,j=0}^{N-1} P_{i,j} \left[ \frac{(i - \mu_i)(j - \mu_j)}{\sqrt{(\sigma_i^2)(\sigma_j^2)}} \right]$            |
| 3.    | Dissimilarity      | $\sum_{i,j=0}^{N-1} P_{i,j}  i - j $  |
| 4.    | Energy             | $\sum_{i,j=0}^{N-1} P_{i,j}^2$  |
| 5.    | Entropy            | $\sum_{i,j=0}^{N-1} P_{i,j} (-\ln P_{i,j})$   |
| 6.    | Homogeneity        | $\sum_{i,j=0}^{N-1} \frac{P_{i,j}}{1 + (i - j)^2}$  |
| 7.    | Mean               | $\mu_i = \sum_{i,j=0}^{N-1} i(P_{i,j}) , \quad \mu_j = \sum_{i,j=0}^{N-1} j(P_{i,j})$                                 |
| 8.    | Variance           | $\sigma_i^2 = \sum_{i,j=0}^{N-1} P_{i,j} (i - \mu_i)^2 , \quad \sigma_j^2 = \sum_{i,j=0}^{N-1} P_{i,j} (j - \mu_j)^2$ |
| 9.    | Standard Deviation | $\sigma_i = \sqrt{\sigma_i^2} , \quad \sigma_j = \sqrt{\sigma_j^2}$   |

Table 1. GLCM Feature with Formula

In the projected Multiple Support Vector Classifier Scheme, the chore of classifier demonstrating is articulated as the piece-wise estimate of the parting border. The future multiple SVM classifier structure is built grounded on piecewise divider and exclamation. Chief, the parting border discovery technique is castoff to classify the departure border. Second, the parting border is segregated hooked on some subsections grounded on the uneven set theory. Grounded on the divider of parting border, exercise data sets are built to define the subtasks aimed at recognizing sections of the parting periphery. Then, indigenous SVMs are consequently competent to decipher the relevant subtasks. Lastly, the choices of the indigenous SVMs are suitably united grounded on a probabilistic clarification to get the concluding classification result.

Multiple SVM Classifiers compromise decent correctness also execute faster forecast associated to Naïve Bayes procedure. They likewise usage less reminiscence since they custom a subset of exercise points in decision phase. Multiple-SVM workings thriving with a vibrant margin of parting also by high-dimensional space.

### V. RESULTS

Below we display the results of the developed model with a good user interface. The figure 2 below displays the user interface designed for the purpose of our project. We have designed a good colorful UI with a better user visibility. The figure 3 below shows the integration of K-means-algorithm which displays the 3 dissimilar constellation segmented by algorithm. The operative is obligatory to select the collection with the disease expanse contemporary in the cluster. The figure 4 display the result of complete execution of the project.

The figure displays the features extracted values which are passed to the training network for training. The trained network is cast-off to categorize the test appearance structures with the intended SVM-classifier. The trained and classified network is been tested for the accuracy using the calculation techniques present in the MATLAB software. We also add a column to display the area of the affected region of the skin. We have well designed pushbutton in the tool available which make us to design the UI and project to get a better visibility

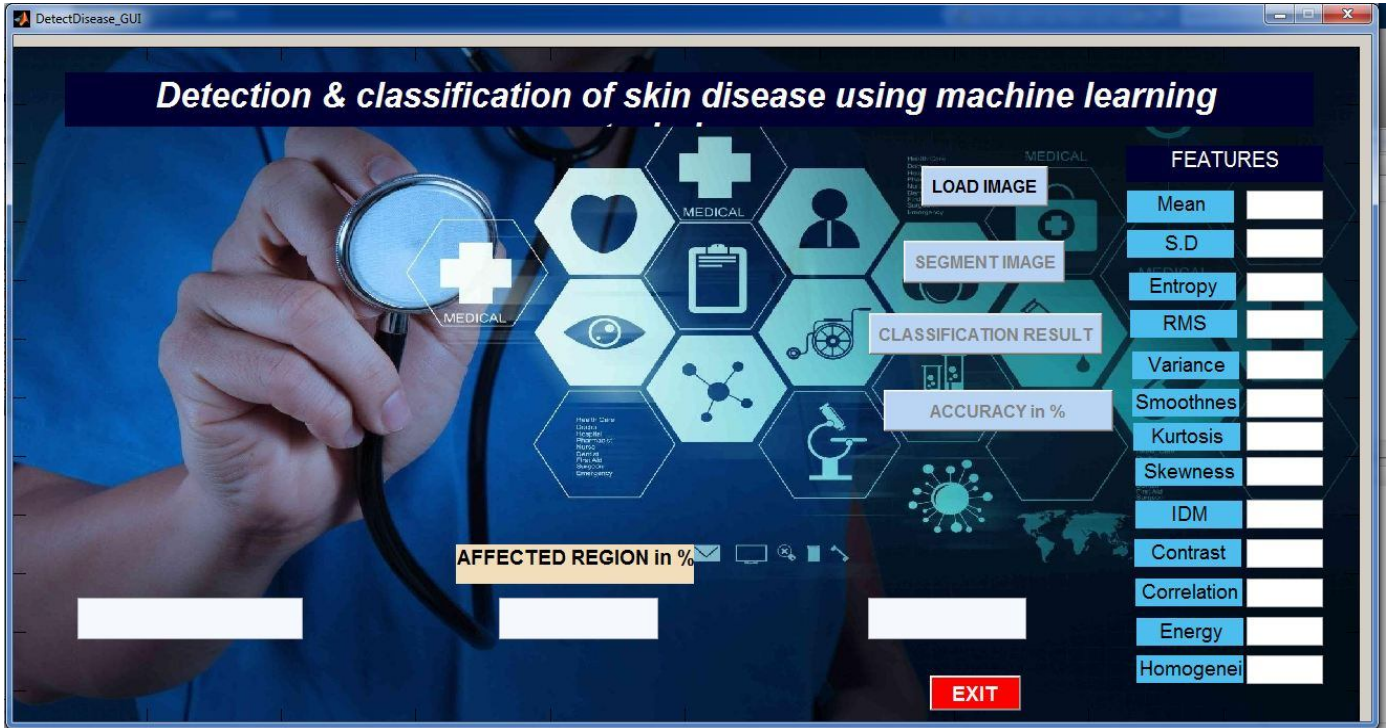


Figure 2. Proposed UI Screen Shot before Execution

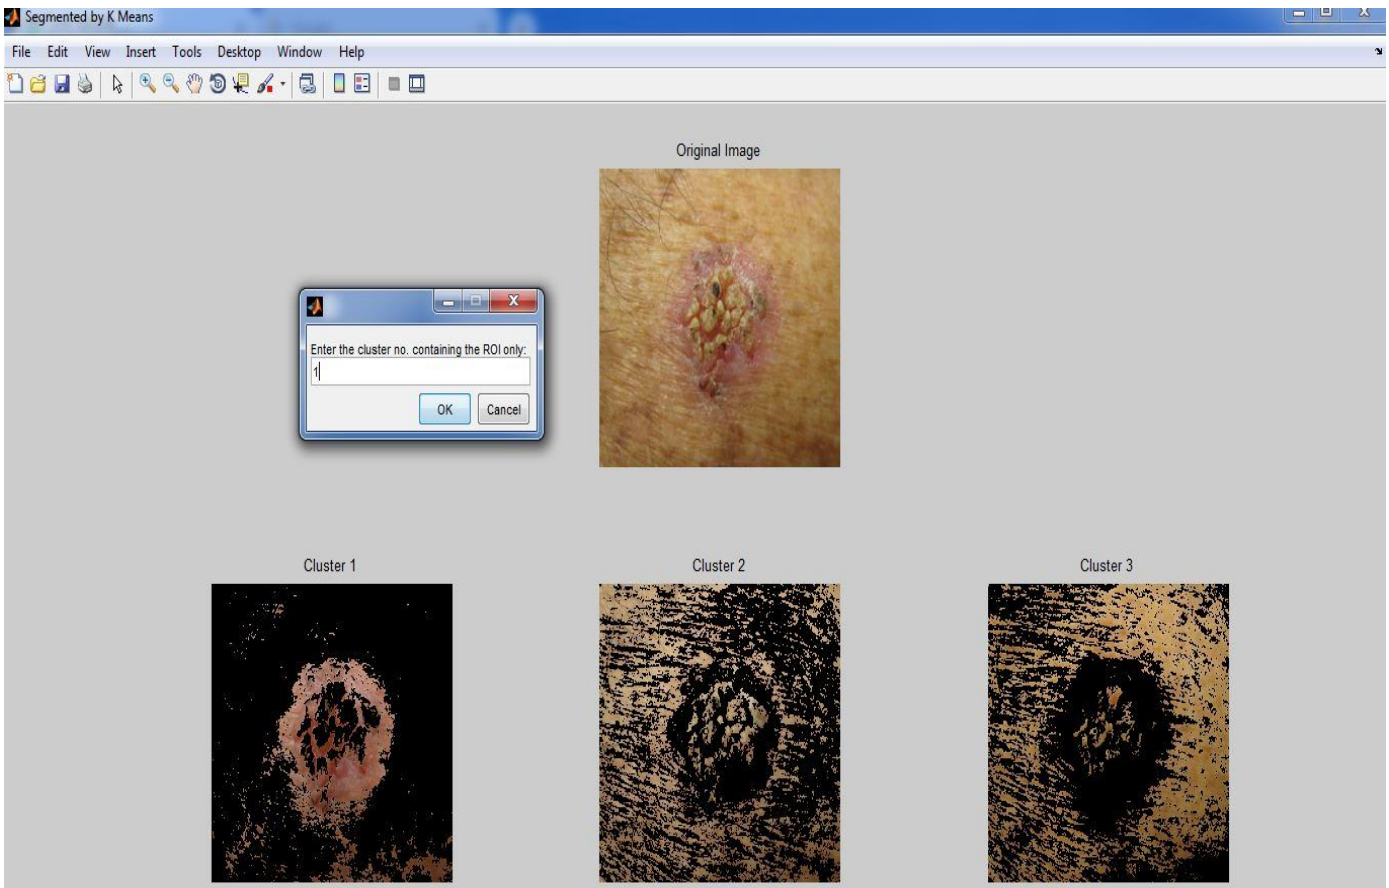


Figure 3. K-Means Segmentation output for 3 clusters

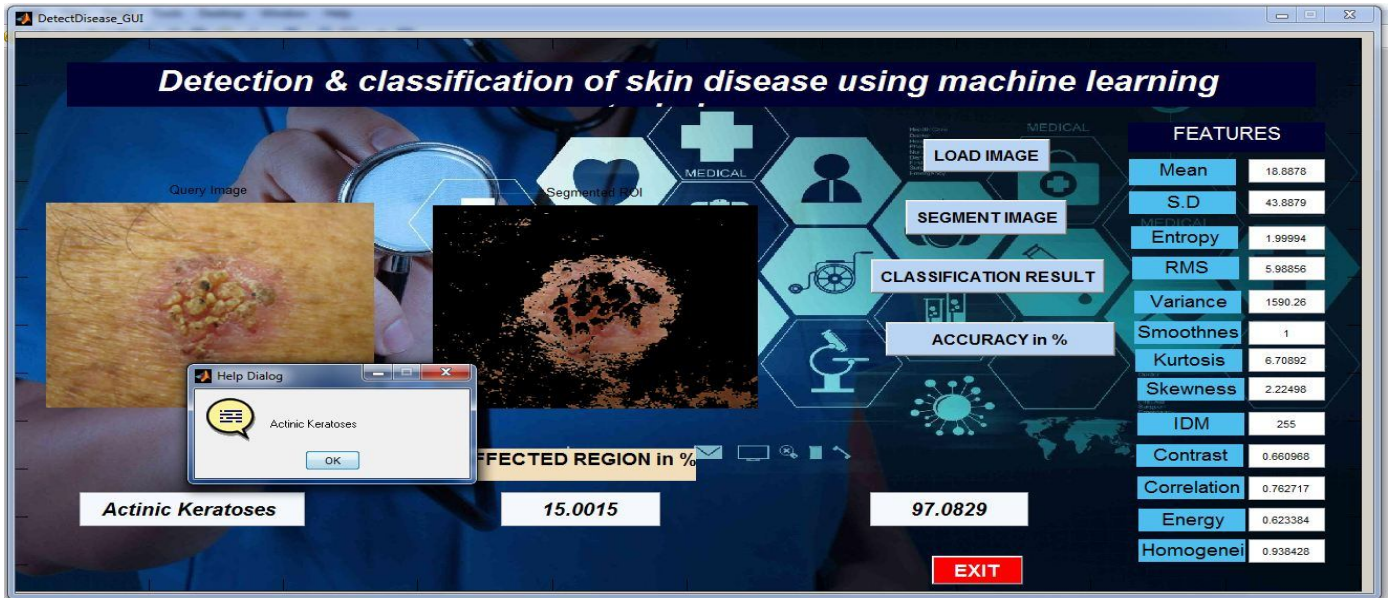


Figure 4. Proposed UI Screen Shot after Execution

In this methodology we were able to pre-process the images based on partial contrast stretching technique and have applied the k-means clustering methodology to segment the diseased ROI. Based on the segmented ROI we have compared the ROI extracted from other segmentation techniques and we concluded the K-means segmentation is better than other methodologies.

Testing performed on 30 sample images. Correctness is intended by means of subsequent formula.

$$\text{Accuracy} = \frac{TP+TN}{TP+FP+TN+FN}$$

| Parameters | Multi-SVM classifier |
|------------|----------------------|
| TP         | 27                   |
| TN         | 01                   |
| FP         | 02                   |
| FN         | 02                   |
| Accuracy   | 93.33%               |

Table 2. Performance of Multi-SVM

## VI. CONCLUSION

In this methodology we were able to pre-process the images based on partial contrast stretching technique and have applied the k-means clustering methodology to segment the diseased ROI. Based on the segmented ROI we have compared the ROI extracted from other segmentation techniques and we concluded the K-means segmentation is better than other methodologies. In this broadsheet we premeditated, measured besides verified novel actual skin object elimination methods once pragmatic towards a unique breast-cancer discovery method grounded going on the usage of K-means formerly technologically advanced via the novelists also deliberate underneath idyllic skin elimination circumstances. The productivity imageries remain likewise refrain by erratic the frenzied province cluster range also we canister accomplish after that consequence that through variable the frenzied province cluster range we canister acquire dissimilar output. As well as so we must proceeds the worth of frenzied sphere cluster precise prudently. Lastly we scrutinized the Concerts of dissimilar actual onslaught methods after pragmatic towards our K-Means grounded radar-cancer recognition method. Towards this conclusion, we skilled as well as verified numerous imageries by means of diverse cleaning methods. In the future, we canister recover the eminence of productivity appearance supplementary by means of morphological-operation besides acquire improved performance dimension. We canister likewise gismo diverse clustering-technique by means of subtractive-clustering-algorithm also finally we be able to contrivance besides examine in dissimilar expanses of image integration.





## REFERENCES

- [1] M. Vidya and M. V. Karki, "Skin Cancer Detection using Machine Learning Techniques," 2020 IEEE International Conference on Electronics, Computing and Communication Technologies (CONECCT), Bangalore, India, 2020, pp. 1-5, doi: 10.1109/CONECCT50063.2020.9198489.
- [2] M. A. M. Almeida and I. A. X. Santos, "Classification Models for Skin Tumor Detection Using Texture Analysis in Medical Images," *Journal of Imaging*, vol. 6, no. 6, p. 51, Jun. 2020 [Online]. Available: <http://dx.doi.org/10.3390/jimaging6060051>
- [3] Dai, Xiangfeng, et al. "Machine learning on mobile: An on-device inference app for skin cancer detection." 2019 Fourth International Conference on Fog and Mobile Edge Computing (FMEC). IEEE, 2019.
- [4] Kumar, N. Vikranth, et al. "Classification of Skin diseases using Image processing and SVM." 2019 International Conference on Vision Towards Emerging Trends in Communication and Networking (ViTECoN). IEEE, 2019.
- [5] EL SALEH, Rola, Sambit BAKHSHI, and NAIT-ALI Amine. "Abysmal convolutional-neural net aimed at expression skin illnesses identification." 2019 Fifth International Conference on Advances in Biomedical Engineering (ICABME). IEEE, 2019.
- [6] A.A.L.C Amarathanga, "Expert System for Diagnosis of Skin Disease." *International Journal of Scientific & Technology Research*, Volume 4, Issue 01, 2017.
- [7] Santosh Achakanalli & G.Sadashivappa, "Statistical Analysis Of Skin Cancer Image - A Case Study ", *International Journal of Electronics and Communication Engineering (IJECE)*, Volume 3, Issue 3, May 2017.
- [8] Narayanan, H. R. (2017). Automatic Classification of Skin Cancer Using KNN, SVM and CNN. *Eurasian Journal of Analytical Chemistry*, 12(1), emEJAC201719.
- [9] S. Caorsi and C. Lenzi, "Skin removal techniques for breast cancer radar detection based on artificial neural networks," *IEEE*, 2015, doi: 10.1109/MMS.2015.7375418.



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)