



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 6 Issue: III Month of publication: March 2018

DOI: <http://doi.org/10.22214/ijraset.2018.3396>

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Development of Pervious Pavement for the Effective Management of Stormwater

¹Sourabh Patil, ²Vaibhav Patil, ³Shilpa Patil, ⁴Tushar Rupnar, ⁵Padmashri Bindage, ⁶Prof .S.B. Patil

^{1, 2, 3, 4, 5} Department of Civil Engineering, Sanjay Ghodawat Group of Institutions, Atigre

⁶ Assistant Professor, Department of Civil Engineering, Sanjay Ghodawat Group of Institutions, Atigre

Abstract: *In India water logging in parking lots is major issue especially during monsoon as pavements are normally impermeable. Pervious pavement is sustainable measure to reduce runoff and water logging. Pervious pavement consists of base and sub-base course which allows movement of water percolated through its pervious concrete surface. In addition to reducing runoff this pavement traps suspended solids and filters storm water. Aim of this work is to make pervious pavement suitable for parking lot which allows water to percolate through surface course and collect percolated water by means of perforated pipes laid in base course. This paper gives details of mix design of pervious concrete, construction and cost analysis of pervious pavement.*

Keywords: *Pervious pavement , cost analysis*

I. INTRODUCTION

Pervious pavement are those in which all layers are intended to be permeable and pavement structure serves as reservoir to store water during storm period in order to reduce storm water runoff. Pervious concrete pavement is an effective way to minimize runoff and water logging issue. It is best solution for problem of increased storm water runoff.

Pervious pavement has ability not only to reduce runoff volume but also to trap suspended solids.

Topmost layer of this kind of pavement consists of pervious concrete. Pervious concrete consists of cement, water, coarse aggregates and little or no fine aggregates. It has open graded structure and has interconnected voids which allows rainwater or stormwater percolate through it. Below pervious concrete boulders are laid which act as water reservoir. Water from this boulder reservoir is drained out through perforated pipes. These pipes are covered with permeable geo-fabric which allows water to percolate into provide pipes. These geo-fabric also entraps suspended impurities present in water.

Pervious pavement results in more efficient land use by minimizing retention ponds, swales, and other stormwater management devices.

II. METHODOLOGY

A permeable pavement system drain outs the rain water up to 80-90 %. To control runoff water in rain, water should be percolated through pavement so there is need to provide pervious concrete as rigid pavement. But percolated water tends to settlement of pavement so it should not be get contacted with soil surface, hence there is provision of drain out pipes and impermeable fabric. Impermeable fabric separates the pavement system from ground surface. Drainout pipes collect water and directed to reservoir or ground water recharge pit.

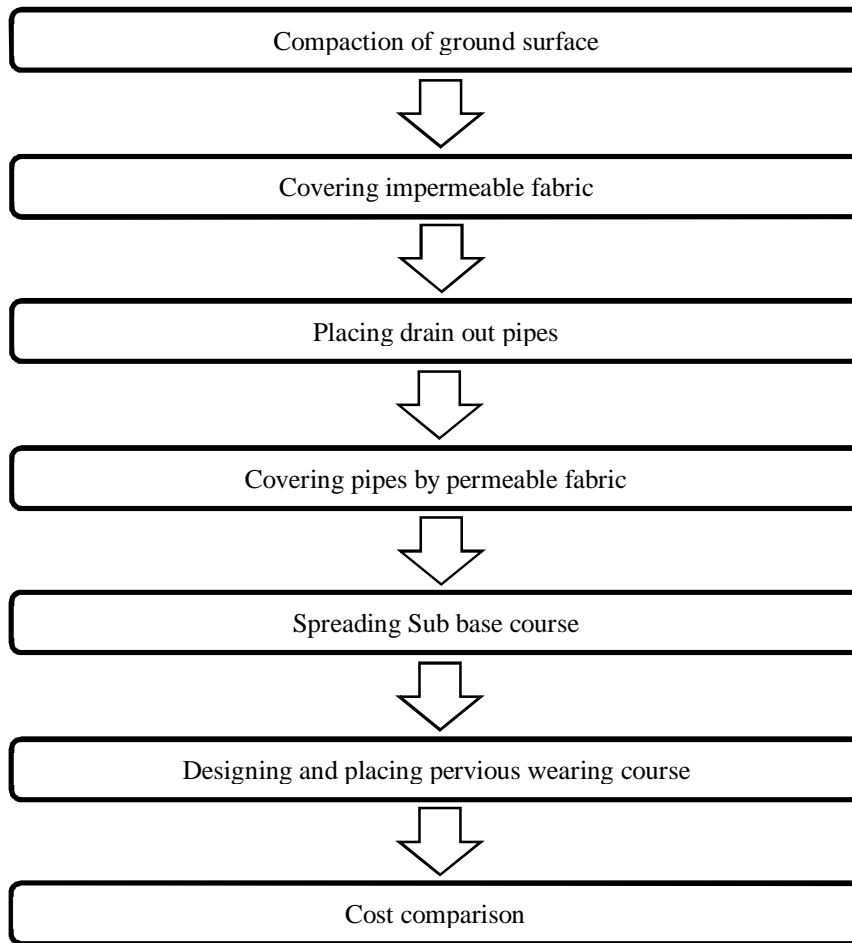


Fig. 1 Flowchart of methodology

III. IMPLEMENTATION

A. Compaction

Ground surfaces compacted with required shape by more than 15 tonnes roller. This shape provides the position to place drain out pipes. Slope provided to flow water towards pipes.

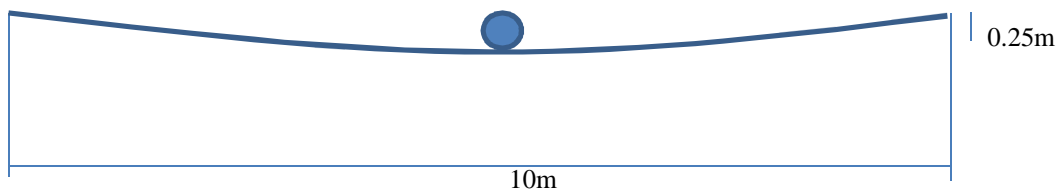


Fig. 2 Shape of ground after compaction

B. Impermeable Fabric

Fabric covered over entire ground where road to be constructed. So that settlement is prevented.

C. Sub-base Course

As regular construction of road boulders are placed on compacted ground and piped of required thickness.

D. Wearing Course

As per the ACI design procedure

Determination of Coarse Aggregate (Wa)

Dry-robbd density is 1450 Kg \m3

Wa = Dry rotted density\ (b/bo) = 1450 Kg/m3 x 1 = 1450 Kg (Dry weight)

Adjust to ssd Weight (wssd)

Wssd = Wa X water absorption on Aggregate. = 1450 Kg X 1.01 = 1465 Kg (ssd)

Determination of Cement Content (C)

C = {Vp/ (0.315 + water cement ratio)} x 1000 = {(8.10/35.314)/ (0.31 +0.38)} X1000 =330 Kg

Determination of Water Content (W)

W = Cement x water cement ratio = 330Kg x 0.31 = 102.3 Kg

Determination Solid Volume (Vs)

Aggregate volume (Va) = Wssd/ (Specific gravity of coarse aggregate*1000) = 1477/ (2.75 x 1000) = 101.3 m3

Cement volume (Vc) = (c/Specific gravity of Cement)*1000 = (330/3.15) x 1000 = 0.1035 m3

Water volume (Vw) = (W/1000) = 102.3/1000 = 0.1019 m3

Total solid volume (Vs) = Va +Vc +Vw =0.537 + 0.104 + 0.102 =0.75

Determination of Percentage of Voids (Pv)

Percentage of voids (Pv) = (Vwt - Vs)/Vwt x 100 = (1 -0.743)/1 x 100 =25.8 %

Iterative Trail Batching and Testing

The trail batch weight per cubic meter as follows;

Cement =330 Kg

Water =101 kg

Coarse Aggregate =1465 kg

Test results

TABLE I
COMPRESSIVE STRENGTH

Cube size	3 days	7 days	14 days	28 days
150*150*150	6.4mpa	13.2mpa	18.6mpa	21.3mp=

IV. COST COMPARISON

10m length and 4m width is assumed

Concrete Area – 40 sq.m

Thickness – 0.15m

A. Conventional Pavement

TABLE II
COST OF MATERIAL FOR CONVENTIONAL PAVEMENT

No.	Material	Quantity	Rate	Amount
1	M30 concrete	6 cu.m	6362	38172
2	boulders	40 sq.m	210	8400
			total	46572/-

Cost of labours = 16789.72/-

Total cost = 63361.72/- for 40sq.m

Rate =1584 /- per sq.m

B. Pervious Pavement

TABLE II
COST OF MATERIAL FOR PERVIOUS PAVEMENT

No.	Material	Quantity	Rate	Amount
1	Cement	49bags	320	15680
2	Aggregate	7.45 cu.m	850	6332.5
3	Impermeable fabric	40 sq.m	32	1280
4	Permeable fabric	14m	15	210
5	Pipe	14m	165	2310
6	boulders	40 sq.m	210	8400
			Total	34212.5/-

Cost of labours =21789.72/-

Total =56002.22/-

Rate = 1400/- per sq.m

V. CONCLUSION

This paper discussed about detailed design and construction method of permeable pavement. Also discussed about cost of conventional and pervious pavement. Initial construction cost of pervious pavement is found to be 1400/- per sq.m which is more economical than that of conventional system by 184/- per sq.m. This pervious pavement systems are environmentally sustainable , economical and it is also changing the way development interacts with natural environment.

VI. ACKNOWLEDGMENT

We express our sincere thanks to our H.O.D. Dr. N.K.Patil and our college for providing us with a platform to excel in life. With a sense of regard and gratitude to our project, we would like to thank our guide Prof. S.B. Patil for his guidance, interest and constructive suggestion during the study course. This project would not have been possible without his support and help. We thank him for his valuable and immense knowledge and timely help, which made this, project a reality. We would also like to thank Director Dr.V.V.Kulkarni for his valuable support. We are very thankful to those who helped directly & indirectly to carry out this Project.

REFERENCES

- [1] Evaluation of permeable pavement responses to urban surface runoff. Journal of Environmental Management, Volume 187, 1 February 2017, Pages 43-53 Meysam Kamali, Madjid Delkash, Massoud Tajrishy
- [2] J Filtration and clogging of permeable pavement loaded by urban drainage Water Research, Volume 46, Issue 20, 15 December 2012, Pages 6763-6774 J.Sansalone, X. Kuang, G. Ying, V. Ranieri.
- [3] S. Rajesh Kumar*Volume 6, Issue 6, June (2015), Pp. 165-176 Article Id: 20320150606017, International Journal of Civil Engineering and Technology (IJCIET)



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)