



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 6      Issue: IV      Month of publication: April 2018**

**DOI: <http://doi.org/10.22214/ijraset.2018.4587>**

**[www.ijraset.com](http://www.ijraset.com)**

**Call:  08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# Performance Investigation of a Worm and Worm Wheel Apparatus in Engineering Mechanics Laboratory

Ali Hasan<sup>1</sup>

<sup>1</sup>Jamia Millia Islamia (A Central University)

**Abstract:** A worm gear is used when a high speed reduction ratio is required between crossed axis shafts which do not intersect. The author aim is to investigate the performance of worm and worm wheel apparatus used to lift the heavy loads by applying small efforts in the engineering mechanics laboratory. The study is useful for investigators and designers in the conceptual stage of design phase.

**Keywords:** Worm and worm wheel, Mechanical Advantage, Velocity Ratio, Efficiency

## I. INTRODUCTION

Agitators, conveyors, crushers, cranes, elevators, feeders, small ball mills, mixers, cooling towers, Extruders, Packaging, Filters are the examples of worm gears. Hashiguchi et.al. [1] describes the unconventional friction. Kartal [2] written on concept of elastically similar flat-ended cylinders. Eriten et. al. [3] worked on the behavior of flat rough surfaces. Kostas et.al [4] written on the coefficient of friction between the inter particles. Chiew et .al [5] worked on friction model identification. Piatkowski et.al. [6] Worked on dynamic friction models. Kostas [7] gave a concept on mechanical inter particle loading apparatus. Dong et.al. [8] Prepared a wear reduction model. Deepak et. al. [9] presented the effect of roughness on coefficient of friction. Cura et. al. [10] worked on wear formulation approach. Saha et.al. [11] Demonstrated a modified friction model. Aita et.al. [12] Worked on nonlinear friction models. Putelat et. al. [13] demonstrated their work on frictional waves and Tsampras et al [14] written on experimental study of friction devices and rubber bearings. The author has also consulted a lot of other references including [15-28] for giving a finishing touch to the present work. The apparatus consists of a toothed wheel (known as worm wheel) carrying load drum is shown in Figure-1. A string is wound around the load drum to carry weight 'W' to be lifted. A horizontal spindle is provided with worm and this worm is engaged with the teeth of the worm wheel. To the end of the spindle, an effort pulley is attached. Another string passes round the effort pulley and at the end of which a scale pan is tied. The weights are placed in the pan to find the value of effort 'P'

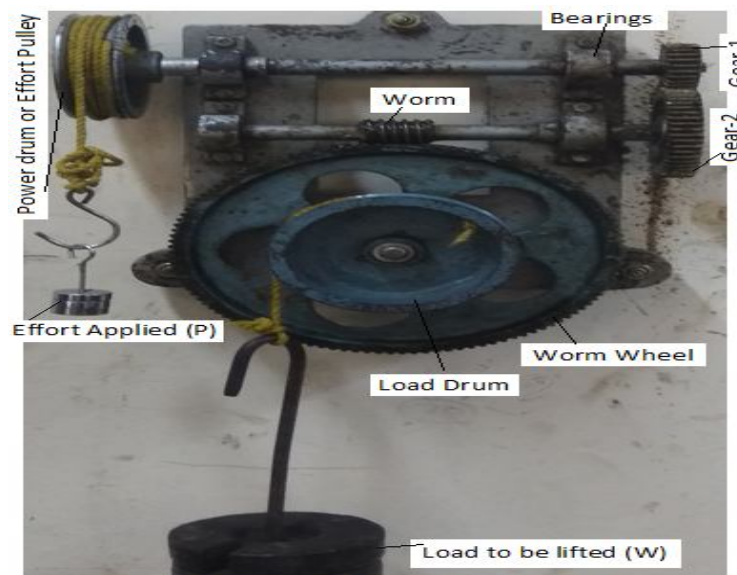


Figure-1: Worm and worm wheel Apparatus

### A. Notations Used

In the present study, the notations and terminology used are as follows.

W = Load to be lifted,

W<sub>f</sub> = Frictional load,

W<sub>i</sub> = Ideal load,

P = Effort to be applied to lift load W,

P<sub>i</sub> = Ideal effort,

P<sub>f</sub> = Frictional effort,

D = Diameter of the effort pulley,

d = diameter of load drum,

M.A. = Mechanical Advantage = W/P,

x = Distance moved by effort P,

y = Distance moved by load W,

V.R. = Velocity Ratio = Distance moved by Effort / Distance moved by Load.

Now, considering one revolution of effort pulley,

(V.R.)<sub>True</sub> = Distance moved by Effort for one revolution of the effort pulley / Distance moved by Load vertically =  $\pi D TG / \pi d = DTG / d$ ,

(V.R.)<sub>Exp</sub> = Distance moved by Effort / Distance moved by Load = x/y,

$\eta$  = Efficiency = M.A. / V.R.,

( $\eta$ )<sub>True</sub> = Efficiency (True) = M.A. / (V.R.)<sub>True</sub>,

( $\eta$ )<sub>Exp</sub> = Efficiency (Experimentally) = M.A. / (V.R.)<sub>Exp</sub>,

FL = Friction Loss = 1 – Efficiency ( $\eta$ ),

(FL)<sub>True</sub> = Friction Loss = 1 – ( $\eta$ )<sub>True</sub>,

(FL)<sub>Exp</sub> = Friction Loss = 1 – ( $\eta$ )<sub>Exp</sub>,

T = Number of teeth on the worm wheel,

T<sub>1</sub> = Number of teeth on the smaller gear,

T<sub>2</sub> = Number of teeth on the larger gear,

G = Gear ratio = T<sub>2</sub> / T<sub>1</sub>,

## II. METHODOLOGY

- A. *Step1*: Measure the circumference of both the pulley and the drum with the help of a string and meter rod or measure their diameters with outside calliper.
- B. *Step2*: Wrap the string round the drum and attach a load W
- C. *Step3*: wrap another string round the pulley and attach a pan with it
- D. *Step4*: Add weights in the pan till the load just starts moving upwards.
- E. *Step5*: Note down the weights in the effort pan
- F. *Step6*: Calculate the M.A., V.R. and efficiency
- G. *Step7*: Repeat the experiment with different load
- H. *Step8*: Enter all the data in the M.S.Exel sheet and determine all the required values as shown in Table-1.

## III. OBSERVATIONS

- A. Diameter of the Effort pulley, D = 120 mm,
- B. Diameter of the load drum, d = 138 mm,
- C. Number of teeth on the worm wheel, T = 120,
- D. Number of teeth on the smaller gear, T<sub>1</sub> = 25,
- E. Number of teeth on the larger gear, T<sub>2</sub> = 50,
- F. Gear ratio, G = T<sub>2</sub> / T<sub>1</sub> = 50 / 25 = 2,
- G. (V.R.)<sub>Th</sub> =  $\pi DTG / \pi d = D * T * G / d = 120 * 120 * 2 / 138 = 208.7$ ,

Table-1: Observations of Worm and Worm Wheel

S.N.	Load to be lifted	Effort applied	Distance moved by P	Distance moved by W	M.A.= W/P	(V.R.)Exp= (x/y)	(V.R.)Th= D*T*G/D	Pi= W/(V.R.)Th	Pf= P-Pi	Wi= P*(V.R.)Th	Wf= Wi-W	Efficiency (η)Exp = M.A./(V.R.)Exp	(η)Th = M.A./(V.R.)Th	Friction Loss FLTh = 1-(η)Th	Loss FLExp = 1-(η)Exp
	W (N)	P (N)	x (mm)	y (mm)			(N)	(N)	(N)	(N)	(N)				
1	40	2.5	377	1.5	16.0	251.3	208.7	0.19	2.31	521.8	481.8	6.4	7.7	92.3	93.6
2	60	3	377	1.6	20.0	235.6	208.7	0.29	2.71	626.1	566.1	8.5	9.6	90.4	91.5
3	80	3.5	377	1.7	22.9	221.8	208.7	0.38	3.12	730.5	650.5	10.3	11.0	89.0	89.7
4	100	4	377	1.8	25.0	209.4	208.7	0.48	3.52	834.8	734.8	11.9	12.0	88.0	88.1
5	120	4.5	377	1.8	26.7	209.4	208.7	0.57	3.93	939.2	819.2	12.7	12.8	87.2	87.3
6	140	5	377	1.8	28.0	209.4	208.7	0.67	4.33	1043.5	903.5	13.4	13.4	86.6	86.6
7	160	5.5	377	1.8	29.1	209.4	208.7	0.77	4.73	1147.9	987.9	13.9	13.9	86.1	86.1
8	180	6	377	1.8	30.0	209.4	208.7	0.86	5.14	1252.2	1072.2	14.3	14.4	85.6	85.7
9	200	6.5	377	1.8	30.8	209.4	208.7	0.96	5.54	1356.6	1156.6	14.7	14.7	85.3	85.3
10	220	7	377	1.8	31.4	209.4	208.7	1.05	5.95	1460.9	1240.9	15.0	15.1	84.9	85.0

IV. RESULT AND DISCUSSION

Mean M.A. = 25.98

(V.R.)Exp = distance moved by effort/ distance moved by load = x/y = 217.48,

(V.R.)Th =  $\Pi DTG / \Pi d = D * T * G / d = 120 * 120 * 2 / 138 = 208.7$ ,

(η)True = Efficiency (True) = M.A. / (V.R.)True = 12.45 %,

(FL)True = Friction Loss = 1 - (η)True = 87.6 %,

(FL)Exp = Friction Loss = 1 - (η)Exp = 88.1 %,

The detailed result analysis is summarized in Table-1. The relation between the effort applied (P) and load (W) to be lifted is shown in Figure-2. The relation between Mechanical Advantage (M.A.) and load to be lifted (W) is shown in Figure-3. Figure-4 illustrates the relationship between efficiency (η) and load (W).



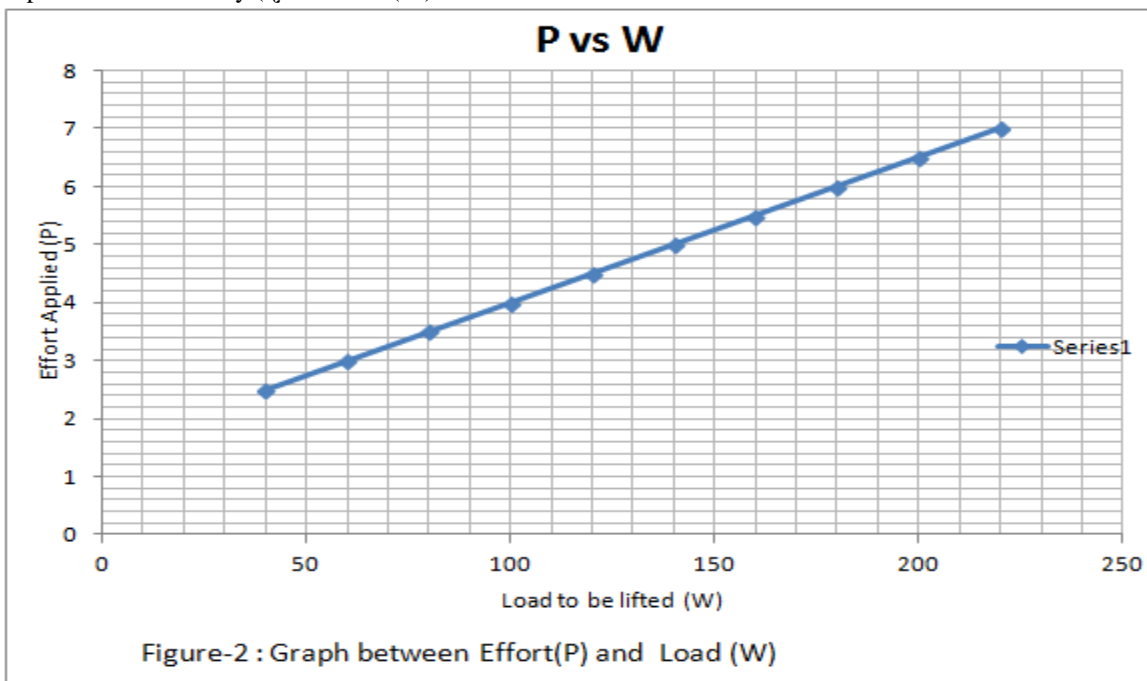


Figure-2 : Graph between Effort(P) and Load (W)

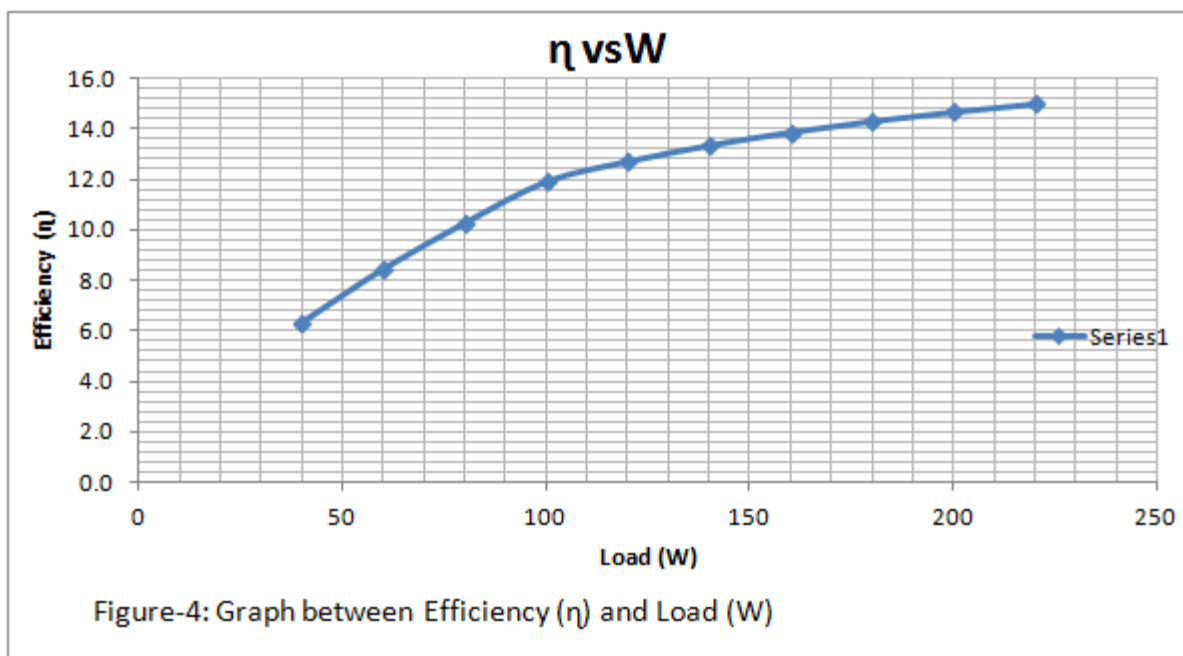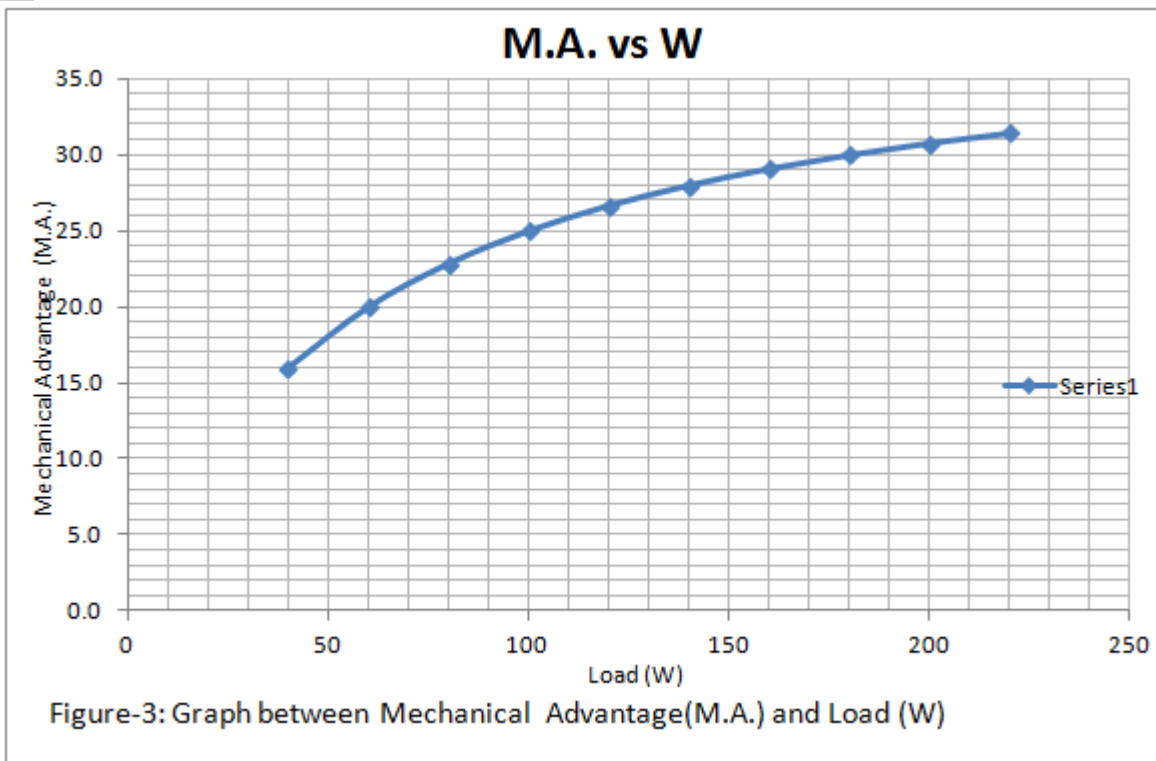

### V. CONCLUSIONS

We observe from Figure -2 that the effort (P) is directly proportional to the load to be lifted (W). Since the efficiency is greater less than 50 %, so, this equipment is irreversible. Figure-3 gives the relation between M.A. and W. we observe that after 200N, the value of M.A. becomes almost to be constant. We observe from Figure-5 that after 200 N of load, the efficiency of the equipment has a tendency to become almost constant.

### VI. ACKNOWLEDGMENTS

The author appreciates and is thankful to Head, Department of Mechanical Engineering, F/O- Engineering and Technology, Jamia Millia Islamia (A Central University), New Delhi for granting permission and all those who participated in the study and helped me to facilitate the study successfully.

## REFERENCES

- [1] K. Hashiguchi, S. Ozaki, T. Okayasu. (2005), "Unconventional friction theory based on the sub loading surface concept", *International Journal of Solids and Structures* 42:5-6, 1705-1727.
- [2] M.E. Kartal, D.A. Hills, D. Nowell, J.R. Barber. (2010), "Torsional contact between elastically similar flat-ended cylinders", *International Journal of Solids and Structures* 47:10, 1375-1380.
- [3] M. Eriten, A.A. Polycarpou, L.A. Bergman. (2011), "Physics-based modeling for fretting behavior of nominally flat rough surfaces", *International Journal of Solids and Structures* 48:10, 1436-1450.
- [4] Kostas Senetakis, Matthew R. Coop, M. Cristina Todisco. (2013), "The inter-particle coefficient of friction at the contacts of Leighton Buzzard sand quartz minerals", *Soils and Foundations* 53:5, 746-755.
- [5] T.H. Chiew, Z. Jamaludin, A.Y. Bani Hashim, N.A.Rafan, L. Abdullah, "Identification of Friction Models for Precise Positioning System in Machine Tools", *Procedia Engineering*, Volume 53, 2013, pp. 569-57
- [6] T. Piatkowski, "Dahl and LuGre dynamic friction models — The analysis of selected properties", *Mechanism and Machine Theory*, Volume 73, 2014, pp. 91-10
- [7] Kostas Senetakis, Matthew Coop. (2014), "The Development of a New Micro-Mechanical Inter-Particle Loading Apparatus", *Geotechnical Testing Journal* 37:6, 20120187.
- [8] Sheng Dong, Marcelo J Dapino. (2014), "Wear reduction through piezoelectrically-assisted ultrasonic lubrication", *Smart Materials and Structures* 23:10, 104005.  
Online publication date: 12-Sep-201
- [9] Deepak B. Patil, Melih Eriten. (2014), "Effects of Interfacial Strength and Roughness on the Static Friction Coefficient", *Tribology Letters* 56:2, 355-374.
- [10] Francesca Cura, Waqar Qureshi, Andrea Mura. (2016), "A Methodological Approach for Incremental Fretting Wear Formulation", *Tribology Letters* 64:2.
- [11] Ashesh Saha, Pankaj Wahi, Marian Wiercigroch, Andrzej Stefański, "A modified LuGre friction model for an accurate prediction of friction force in the pure sliding regime", *International Journal of Non-Linear Mechanics*, Volume 80, 2016, pp. 122-13
- [12] Yuuki Aita, Natsumi Asanuma, Akira Takahashi, Hiroyuki Mayama, Yoshimune Nonomura. (2017) , "Nonlinear friction dynamics on polymer surface under accelerated movement", *AIP Advances* 7:4, 045005.
- [13] T. Putelat, J. H. P. Dawes, A. R. Champneys. (2017), "A phase-plane analysis of localized frictional waves", *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Science* 473:2203, 20160606.
- [14] Georgios Tsampras, Richard Sause, Robert B. Fleischman, José I. Restrepo. (2018), "Experimental study of deformable connection consisting of friction device and rubber bearings to connect floor system to lateral force resisting system", *Earthquake Engineering & Structural dynamics*; 47:4, 1032-1053
- [15] Manoj Patil, Gaurav Udgirkar, Rajesh Patil and Nilesh, "Automated Car Jack", *International Journal of Current Engineering and Technology* ,Vol.4, No.4, Aug 2014
- [16] Tarachand G., Chatpalliwar Ashwin S. And Bhojar Amar A., "Optimizing Efficiency of Square Threaded Mechanical Screw Jack by Varying Helix Angle", *International Journal of Modern Engineering Research (IJMER)*, Vol.2, Issue.1, pp504-508, Jan-Feb 2012.
- [17] H. Shames, "Engineering Mechanics: Statics and dynamics", 4th Editions, PHI, 2002
- [18] F. P. Beer & E. R. Johnston, "Vector Mechanics for Engineers, Vol I - Statics, Vol II – Dynamics", 10th Editions, Tata McGraw Hill, 2013.
- [19] L. Meriam & L. G. Kraige, "Engineering Mechanics, Vol I – Statics, Vol II – Dynamics", 7th Ed, Wiley India Pvt Ltd, 2013
- [20] R. C. Hibbler, "Engineering Mechanics: Principles of Statics and Dynamics", 11<sup>th</sup> editions, Pearson Press, 200
- [21] Andy Ruina & Rudra Pratap, "Introduction to Statics and Dynamics", Oxford University Press, 201
- [22] H.J. Sawant, "Engineering Mechanics", 2<sup>nd</sup> Edition, Technical Publication, 201
- [23] Boresi & Schmidt, "Engineering Mechanics-Statics & Dynamics", First edition, Cengage Learning India Pvt Ltd, 20
- [24] S. Thimoshenko & D.H. Young, "Engineering Mechanics", 5th edition, Tata McGraw Hill, 201
- [25] A. Nelason, "Engineering Mechanics: Statics and Dynamics", McGraw-Hill Edition, 200
- [26] K. L. Kumar and V. Kumar, "Engineering Mechanics", 4<sup>th</sup> Editions, McGraw Hill, 201
- [27] B. Bhattacharya, "Engineering Mechanics", First Edition, Oxford Press Publications, 200
- [28] R.S.Khurmi and J.K.Gupta, "A Textbook of Machine Design", S Chand & Co Ltd; 6<sup>th</sup> edition, 1987.



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)