



# IJRASET

International Journal For Research in  
Applied Science and Engineering Technology



---

# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 8    Issue: VI    Month of publication: June 2020**

**DOI: <http://doi.org/10.22214/ijraset.2020.6089>**

**[www.ijraset.com](http://www.ijraset.com)**

**Call:  08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# Cellulose and Starch as the Source of Bioplastic

S. S. Shirakshaya<sup>1</sup>, M. Vignesh<sup>2</sup>, M. Dhananandhini<sup>3</sup>, N. Kavya<sup>4</sup>, Dr. M. Poongothai<sup>5</sup>

<sup>1, 2, 3, 4</sup> PG Students, <sup>5</sup>Assistant Professor, Department of Biotechnology, Dr. N. G. P. Arts and Science College, Coimbatore, India

**Abstract:** Over last several years, need of the polymers has increased. Polymers are a broad class of materials that can be natural in origin or synthetic. Very small variations in the chemical structure of polymer could lead to large change in their biodegradability.

A vast number of biodegradable polymers (example: chitin, starch, polyhydroxyalkanoate, polylactide, polycaprolactone including polypeptides) has been synthesized or is formed in natural environment during the growth cycles of different organism. Microorganisms and enzymes capable of degrading such polymers have been identified.

The use of additives like sorbitol, glycerol and poly ethylene glycol will enhance strength and thermal stability of polymers during processing.

Already existing biopolymers are facing the issues in meeting market demand, cost of manufacturing, being non recyclable, release of carbon dioxide during manufacturing and release of methane gas during degradation. These issues can be overcome by novel starch and cellulose based bioplastic produced from biomass. Bioplastic will meet the market demand and degrade in the soil at high temperature.

**Keywords:** Bioplastic, Starch, Cellulose, Plasticizer, Biodegradable

## I. INTRODUCTION

Bioplastics can be defined as plastics that are made from natural source such as corn and sugarcane bagasse. By producing these kind of plastic demand of fossil fuels can be reduced, reducing CO<sub>2</sub> emission and reduce accumulation of the non biodegradable plastic wastes get reduced. Conventional plastics not only take many decades to decompose, but also produce toxins during degradation. Hence, there is need to produce plastics from materials that can be readily degradable to form an environment that is "eco-friendly" [1].

Starch is a polysaccharide commonly found in plant sources. It consists of helical structures of amylose (amorphous and crystalline phases) and a branching structure of amylopectin (amorphous phase). The ratio of amylose and amylopectin influences the properties of starch [2].

Currently, the main opportunities for bioplastics are in film making but in future bioplastics will be used more in higher value products such as electronics and vehicle parts [3].

Many researchers used plant cellulose fiber, such as by products of cotton, waste straw from rice, wheat, rye, barley and cornhusk, wood fiber for the synthesis of cellulose.

The raw materials have a high impact on the cost of bio-based plastic production as in the case of cellulose the cost is highly reduced [4]. According to statistics, by 2025, at least 55% of municipal waste must be recycled. By 2030 the target will rise to 60% and by 2035 it will be 65%.

Recycling of packing materials should be 65% by 2025, and 70% by 2030. Increase in the population the target to reduce the plastic usage is also increased [5]. The bioplastics does not degrade at room temperatures that should need humidity and microorganisms to degrade [6].

## II. BIOPLASTIC AND ITS SOURCE

Bioplastics are that which are produced from renewable resources and are biodegradable in nature. These biopolymers undergo decomposition into CO<sub>2</sub>, H<sub>2</sub>O and inorganic compounds or biomass under natural conditions through the enzymatic action of microorganisms [7].

Classification Of Bioplastic & Its Source [Source: Reference 8]

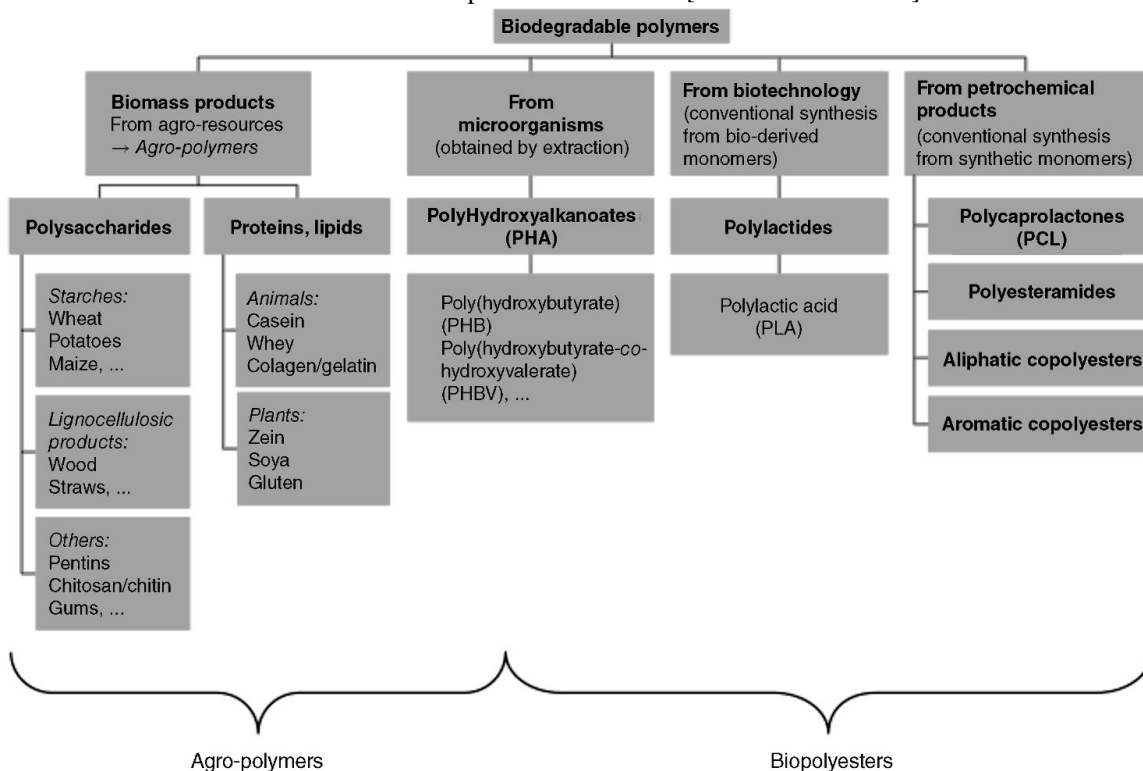


TABLE I  
Bioplastic From Different Source

MATERIAL	SOURCE MATERIAL	REFERENCE
Starch	Corn starch	[09]
	Potato peels	[10]
	Banana peels	[11,12,13]
	Cassava	[14]
	Giant squid ( <i>Dosidicus gigas</i> )	[15]
	Newspaper pulp	[16]
Cellulose	Rice straw	[17]
	Oil Palm fruit bunch	[18]
	Citrus waste	[19]
	Corn leaf biomass	[20]
Protein	Sorghum and Millet	[21]
	Rapeseed Oil	[22]
	Oil palm mesocarp fibre	[23]
Poly-Lactic Acid	Lactic acid	[24]
	Waste paper	[25]
	Cornstarch/eggshell	[26]
	Prosopis juliflora	[27]
Polyhydroxybutyrate	Water hyacinth	[28]
	Ralstonia solanacearum	[29]
	Burkholderia sacchari	[30]
Starch and cellulose	Apple pomace	[31]

Polyhydroxyalkanoates	Apple pulp waste	[32]
	Ralstonia eutropha 511	[33]
	Cyanobacteria	[34]
	Waste frying oil- Cupriavidus necator Macroalgae -	[35, 36]
	Haloferax mediterranei	[37]
	Pseudomonas putida	[38, 39]
	Bacillus sp (F15)	[40]
Whey protein	Residual dairy streams	[41]
Myofibrillar proteins	Gilded catfish (Brachyplatystoma rousseauxii) waste	[42]
Chitin	Carp fish (cyprinus carpio L.)	[43]
	Giant squid (dosidicus gigas)	[44]
<u>Wheat gluten</u>	Wheat	[45]

### III. STARCH AS A BIOPLOYMER

Starch is the second largest biomass produced on earth. Starch is a white, granular, organic chemical that is produced by all green plants. Starch may be a soft, white, tasteless powder that is insoluble in cold water, alcohol or other solvents. The basic formula of the starch molecule is  $(C_6H_{10}O_5)_n$ . Starch is the polysaccharide comprising of glucose monomers joined by  $\alpha$  1,4 linkages. The simplest form of starch is the linear polymer viz, amylose and amylopectin is the branched form [46].

Starch and its derivatives are produced commercially from a range of biomass and raw materials such as banana peel, corn, wheat, pea, potato and cassava roots. Starch has a wide range of applications beyond the food industry, in the paper and board sector (in the production of recycled paper and surface coating), in the pharmaceuticals sector as binding agent, in the textile industry, in the industrial binder sector as gypsum boards and adhesives [47]. Decrease in tensile mechanical properties was noted at high starch concentrations. Transparency was also seen to decrease with increasing starch concentration [48].

Corn starch consists around 25% amylose and 75% amylopectin molecules. The amylose molecules loose water due to which the biodegradation tendency increases and by amylopectin molecules plasticizer properties increase, i.e. rapid gel formation, good absorption capacity and good flexural strength [49].

Potato peel bioplastic have higher water absorption capacity than commercial bioplastic. Therefore, Potato peel bioplastic may not be used in the food service industry but can be used as packing material bioplastics produced from potato peels completely biodegraded within 28 days [50].

Cassava contains a large amount of starch than the other kind of biomass. Resistance to degradation of bioplastics made from cassava was strongly influenced by the quantity of glycerol used as the plasticizer. The greater the amount of glycerol used, faster the degradation process (the complete degradation occurred on the 9th day) [51]

The bioplastic produced from banana peels that can be used as packaging material. Sodium metabisulphite act as the anti microbial agent, glycerol is added to increases its flexibility. The degradation of bioplastic starts after 3 to 4 months from the date of production [52].

### IV. CELLULOSE AS A BIOPLOYMERS

Cellulose is an organic chemical compound with the molecular formula  $(C_6H_{10}O_5)_n$ . It is a polysaccharide consisting of a linear chain of several hundred to over ten thousand  $\beta(1\rightarrow4)$  linked D-glucose units. Cellulose is the structural component that is found in the primary cell wall of green plants, algae and oomycetes [53]. Plant-derived cellulose is usually found with the mixture of lignin, hemicellulose, pectin and other substances. Cellulose is derived from fiber. Fibers are insoluble in water, it should be treated with sodium chlorite and with concentrated acids at high temperature to get pure cellulose.

Cellulose is taken out from waste newspapers by decomposing them. Then cellulose is decomposed into starch/glucose by process called Cellulolysis which is done with the help of enzymes derived from organisms (*Trichoderma reesei* and *Aspergillus terreus*). Finally, bioplastic is prepared [54].

Cellulose acetate was synthesized from cellulose which was separated from teak wood (*Tectona grandis*) biowaste. The separation process used an separation method using sodium sulfite, nitric acid, sodium hydroxide and bleached with calcium hypochlorite. Cellulose acetate were synthesized with acetic anhydride, toluene as a solvent and sulphuric acid as a catalyst [55].

Cellulose pulp was taken from elephant grass leaves. Bioplastic is synthesis with various concentration of chitosan to cellulose pulp ratio 3:10, 4:10, 5:10 (w/w), combined 3 mL of glycerol 2 g of cellulose pulp produced by using inversion phase method. The results have shown that cellulose from elephant grass leaves could form bioplastic with good tensile strength of 7.2 MPa at the ratio of chitosan to cellulose pulp 4:10 [56]. Cellulose - based bioplastic made corn stalks are made possible. However, their mechanical property is weaker when compared to commercial cellophane [57].

Cellulose nanocrystals (CNS) were isolated from rice straw as reinforcing filler of starch-based bioplastics. Tensile strength and modulus of elasticity significantly increased with increasing CNC load. Elongation at break is decreased. The moisture resistance of the starch-based bioplastics was also be enhanced by CNC addition, which was related to the rigid network of crystalline cellulose that hinders the absorption of water [58].

## V. DIFFERENT KINDS OF PLASTICIZERS USED IN BIOPLASTIC PRODUCTION

Plasticizers are small, organic molecules, relatively non-volatile that are added to polymers to impart flexibility, reduce brittleness, reducing crystallinity, improve toughness, processability, durability, lowering glass transition and melting temperatures [59]. Plasticization reduces the relative number of polymer-polymer contacts thereby reduce the rigidity of the 3D structure thereby allowing deformation without rupture. Plasticizers that impart additional functions of electric conductivity, optical quality, flame retardancy, thermoxidative stability, chemical and temperature (high and low) resistance in demanding environments, improvement of gas and moisture impermeability, provide or improve biodegradability [60].

Two types of plasticizers are defined in polymer science namely internal and external. Internal plasticizers are a part of the polymer molecules, co-polymerized into the polymer structure, grafted or reacted with the original polymer thereby making the polymer chains more harder to fit and compact with each other closely reducing the elastic modulus[61]. External plasticizers, on the other hand, are low volatile molecules added to interact with polymers and produce swelling without chemical reaction. Internal molecular forces between plasticizer molecules and between a plasticizer and a polymer like dispersion forces, induction forces, dipole-dipole interaction, hydrogen bonds are important in external plasticization [62]

Different kinds of plasticizers in the literature include polyols such as glycerol, maltitol, glycol, sorbitol, xylitol, butanediol, ethylene glycol, propylene glycol, fructose, sucrose, mannose, fatty acids such as myristate or palmitate. Among these glycerol is the classical plasticizer of starch and perhaps the most widely studied and used polyol plasticizer of thermoplastic starch. This is because of its low cost, nontoxicity (for food and biomedical application) and high boiling point (292° C). Glycerol is known to leach out during aging and humidity exposure, a major limitation for large scale applications [63].

## VI. CONCLUSION

The present review reports the use of starch, cellulose fiber and plasticizers for the synthesis of bioplastic. Bioplastics are formed well with the high amount of amylopectin present in starch. High amount of amylopectin is present in cassava starch. Cellulose sources are abundant in the environment. Cellulose makes the bioplastic stronger and makes it more rigid by forming network with starch. Plastic are more important for our day to day life. We cannot stop the usage of plastic. But we can alternate using ecofriendly bioplastics. It will not cause any pollution to the environment and it will 100% degrade in soil. Bioplastic will be great solution for the most serious urgent global environment problem.

## VII. ACKNOWLEDGEMENT

The author expresses their gratitude towards the host institution Dr. N. G. P. Arts and Science College, DST-FIST Scheme, DBT-Star Scheme, Management, Principal, Deans, Head of the Department, Guide and all other staffs of Department of Biotechnology for rendering all the facilities for support. Communication No: DrNGPASC 2020-21 BS002

## REFERENCE

- [1] Saharan, B. S., & Ankita, S. D. (2012). Bioplastics-for sustainable development: a review. *Int J Microbial Res Technol*, 1, 11-23.
- [2] Jariyasakoolroj, P., Leelaphiwat, P., & Harnkarnsujarit, N. (2018). Advances in research and development of bioplastic for food packaging. *Journal of the Science of Food and Agriculture*.
- [3] Chen, Y. J. (2014). Bioplastics and their role in achieving global sustainability. *Journal of Chemical and Pharmaceutical Research*, 6(1), 226-231.

- [4] Mostafa, N. A., Farag, A. A., Abo-dief, H. M., & Tayeb, A. M. (2018). Production of biodegradable plastic from agricultural wastes. *Arabian journal of chemistry*, 11(4), 546-553.
- [5] Esen, G. A., & AteÅY, M. (2018). Architectural Vantage Point to Bioplastics in the Circular Economy. *Journal of Architectural Research and Development*, 2(5).
- [6] Kipnetich, T. E., & Hillary, M. (2013). A blend of green algae and sweet potato starch as a potential source of bioplastic production and its significance to the polymer industry. *International Journal of Green and Herbal Chemistry*, 2(1), 15-19.
- [7] Kumar, S., & Thakur, K. S. (2017). Bioplastics-classification, production and their potential food applications. *J Hill Agric*, 8(2), 118-129.
- [8] O. Vilpoux and L. Averous, in M. P. Cereda and O. Vilpoux, eds., *Technology, Use and Potentialities of Latin American Starchy Tubers*, NGO Raizes and Cargill Foundation, Sao Paolo, Brazil, 2004, Book No. 3, Chapt. 18, pp. 521–553.
- [9] Agustín, M. B., Ahmmad, B., Alonso, S. M. M., Patriana, F. M. 2014. Bioplastic based on starch and cellulose nanocrystals from rice straw. *Journal of Reinforced Plastics and Composites*. 33(24), 2205–2213.
- [10] Goswami, G., Goswami, M. G., & Purohit, P. (2015). Bioplastics from Organic Waste. *International Journal of Engineering Research and Technology*, 3(23), 1-3.
- [11] Mohapatra, A., Prasad, S., Sharmai, H. 2015. Bioplastics-utilization of waste banana peels for synthesis of polymeric films. University of Mumbai.
- [12] Aznury, M. (2019, February). Mechanical Properties of Bioplastics Product from Musa Paradisica Formatypica Concentrate with Plasticizer Variables. In *Journal of Physics: Conference Series* (Vol. 1167, No. 1, p. 012048). IOP Publishing.
- [13] Mohapatra, a., Prasad, S., & Sharma, H. (2014). Bioplastics utilization of waste banana peels for synthesis of polymeric films. Unpublished PhD Thesis, Chemical Engineering, University of Mumbai.
- [14] Souza, A.C., Benze, R., Ferrão, E.S., Ditchfield, C., Coelho, A.C.V., Tadini, C.C. 2012. Cassava starch biodegradable films : Influence of glycerol and clay nanoparticles content on tensile and barrier properties and glass transition temperature. *LWT - Food Science and Technology*. 46, 110–117.
- [15] Navarro, Y. M., Soukup, K., Jandová, V., Gómez, M. M., Solis, J. L., Cruz, J. F., ... & Cruz, G. J. F. (2019, February). Starch/chitosan/glycerol films produced from low-value biomass: effect of starch source and weight ratio on film properties. In *Journal of Physics: Conference Series* (Vol. 1173, No. 1, p. 012008). IOP Publishing
- [16] Rahmatiah Al Fāruqy, M. S., & Liew, K. C. (2016). Properties of Bioplastic Sheets Made from Different Types of Starch Incorporated With Recycled Newspaper Pulp
- [17] Bilo, F., Pandini, S., Sartore, L., Depero, L. E., Gargiulo, G., Bonassi, A., Federici, S., Bontempi, E. 2018. A sustainable bioplastic obtained from rice straw. *Journal of Cleaner Production*. 200, 357–368.
- [18] Isroi, Cifriadi, A., Panji, T., Wibowo, N. A., Syamsu, K. 2017. Bioplastic production from cellulose of oil palm empty fruit bunch. *International Conference on Biomass: Technology, Application and Sustainable Development*, 65.
- [19] Batori, V., Jabbari, M., Åkesson, D., Lennartsson, P. R., Taherzadeh, M. J., Zamani, A. 2017. Production of Pectin-Cellulose Biofilms : A New Approach for Citrus Waste Recycling. *International Journal of Polymer Science*. 2017, 1-9.
- [20] Sharif Hossain, A.B.M. Uddin, Musamma, M., Veetil, Vajid, N., Fawzi, M. 2018. Nano-cellulose based nano-coating biomaterial dataset using corn leaf biomass: An innovative biodegradable plant biomaterial. *Data in Brief*. 17, 162–168.
- [21] Taylor, J., Zhang, K., & Wang, D. (2019). Industrial and Nonfood Applications. In *Sorghum and Millets* (pp. 393-420). AACC International Press.
- [22] Delgado, M., Felix, M., Bengochea, C. 2018. "Industrial Crops & Products Development of bioplastic materials : From rapeseed oil industry by products to added-value biodegradable biocomposite materials. *Industrial Crops and Product*. 125, 401–407.
- [23] Anuar, Y., Ariffin, T. A. T., Norraahim, H., Hassan, M. N. F., Ali, M. 2019. Sustainable one-pot process for the production of cellulose nano fi ber and polyethylene / cellulose nano fiber composites. *Journal of Cleaner Production*. 207 (2), 590–599.
- [24] Reddy, R. L., Reddy, V. S., & Gupta, G. A. (2013). Study of bio-plastics as green and sustainable alternative to plastics. *International Journal of Emerging Technology and Advanced Engineering*, 3(5), 76-81.
- [25] Joshi, S., G. G., Sharm, U., Goswani, G. 2015. Bio-Plastic From Waste Newspaper. Conference paper.
- [26] Mohamad, S. F. S., Ramli, N. I. T., Shohaimi, N. A. M., Zainuddin, N. S., & Lothfy, F. A. PRODUCTION OF BIODEGRADABLE PLASTIC FROM EGG SHELL
- [27] Kasirajan, S., Umopathy, D., Chandrasekar, C., Aafrin, V., Jenitapeter, M., Udhyasooriyan, L., ... & Muthusamy, S. (2019). Preparation of poly (lactic acid) from *Prosopis juliflora* and incorporation of chitosan for packaging applications. *Journal of bioscience and bioengineering*.
- [28] Walfathiyah, A., Kusuma, A. P., & Cahya, F. N. Optimization of Plasticizer Glycerol in Edible Film Based Water Hyacinth (*Eichornia crassipes*) Starch.
- [29] Macagnan, K. L., Alves, M. I., Piecha, C. R., Torres, M. M., Kesslerlingh, S. M., Oliveira, P. D. D., ... & Moreira, A. D. S. (2019). Production and Physicochemical Characterization of Poly (3-hydroxybutyrate) Bioplastic by Brazilian Bacterium *Ralstonia solanacearum* Under Different Production Media and Saline Stress Conditions. *Industrial Biotechnology*, 15(4), 248.
- [30] Al-Battashi, H., Annamalai, N., Al-Kindi, S., Nair, A. S., Al-Bahry, S., Verma, J. P., & Sivakumar, N. (2019). Production of bioplastic (poly-3-hydroxybutyrate) using waste paper as a feedstock: Optimization of enzymatic hydrolysis and fermentation employing *Burkholderia sacchari*. *Journal of cleaner production*, 214, 236.
- [31] Gustafsson, J., Landberg, M., Batori, V., Åkesson, D., Taherzadeh, M. J., & Zamani, A. (2019). Development of Bio-Based Films and 3D Objects from Apple Pomace. *Polymers*, 11(2), 289
- [32] Rebocho, A. T. M. (2018). Development of films based on bacterial biopolyesters produced from apple pulp waste (Doctoral dissertation)
- [33] Bhatia, S. K., Gurav, R., Choi, T. R., Jung, H. R., Yang, S. Y., Moon, Y. M., ... & Yang, Y. H. (2019). Bioconversion of plant biomass hydrolysate into bioplastic (polyhydroxyalkanoates) using *Ralstonia eutropha* 5119. *Bioresource technology*, 271
- [34] Bhati, R. (2019). Biodegradable Plastics Production by Cyanobacteria. In *Biotechnology Products in Everyday Life* (pp. 131). Springer, Cham
- [35] Verlinden, R. A., Hill, D. J., Kenward, M. A., Williams, C. D., Piotrowska-Seget, Z., & Radecka, I. K. (2011). Production of polyhydroxyalkanoates from waste frying oil by *Cupriavidus necator*. *AMB express*
- [36] Vijay, R., & Tarika, K. (2019). Microbial Production of Polyhydroxyalkanoates (Phas) Using Kitchen Waste as an Inexpensive Carbon Source. *Biosciences Biotechnology Research Asia*, 16(1)

- [37] Ghosh, S., Gnaim, R., Greiserman, S., Fadeev, L., Gozin, M., & Golberg, A. (2019). Macroalgal biomass subcritical hydrolysates for the production of polyhydroxyalkanoate (PHA) by *Haloferax mediterranei*. *Bioresource technology*, 271
- [38] Gatea, I. H., Abbas, A. S., Abid, A. G., Halob, A. A., Maied, S. K., & Abidali, A. S. (2018). Isolation and characterization of *Pseudomonas putida* producing bioplastic (Polyhydroxyalkanoate) from vegetable oil waste. *Pak J Biotechnol*, 15, 469-473
- [39] Hadisoewignyo, L., Foe, K., & Tjandrawinata, R. R. (2017). Isolation and characterization of Agung banana peel starch from East Java Indonesia. *International Food Research Journal*, 24(3), 1324.
- [40] Alshehrei, F. (2019). Production of Polyhydroxybutyrate (PHB) by Bacteria Isolated from Soil of Saudi Arabia. *J Pure Appl Microbiol*, 13(2), 897
- [41] Chalermthai, B., Chan, W. Y., Bastidas-Oyanedel, J. R., Taher, H., Olsen, B. D., & Schmidt, J. E. (2019). Preparation and Characterization of Whey Protein-Based Polymers Produced from Residual Dairy Streams. *Polymers*, 11(4), 722
- [42] Araújo, C. S., Rodrigues, A. M. C., Joelle, M. P., Araújo, E. A. F., & Lourenço, L. F. H. (2018). Optimizing process parameters to obtain a bioplastic using proteins from fish byproducts through the response surface methodology. *Food packaging and shelf life*, 16, 23
- [43] Zaku, S. G., Aguzue, S. E. O., & Thomas, S. A. (2011). Extraction and characterization of chitin; a functional biopolymer obtained from scales of common carp fish (*Cyprinus carpio* L.): A lesser known source. *African Journal of Food Science*, 5(8), 478-479.
- [44] Navarro, Y. M., Soukup, K., Jandová, V., Gómez, M. M., Solis, J. L., Cruz, J. F., ... & Cruz, G. J. F. (2019, February). Starch/chitosan/glycerol films produced from low-value biomass: effect of starch source and weight ratio on film properties. In *Journal of Physics: Conference Series* (Vol. 1173, No. 1, p. 012008). IOP Publishing.
- [45] Thammahiwes, S., Riyajan, S. A., & Kaewtatip, K. (2017). Preparation and properties of wheat gluten based bioplastics with fish scale. *Journal of cereal science*, 75, 186
- [46] Jane, J. J. M. S. (1995). Starch properties, modifications, and applications. *Journal of Macromolecular Science, Part A: Pure and Applied Chemistry*, 32(4), 751-757.
- [47] Laycock, B. G., & Halley, P. J. (2014). Starch applications: State of market and new trends. In *Starch Polymers* (pp. 381-419). Elsevier.
- [48] Gonzalez-Gutierrez, J., Partal, P., Garcia-Morales, M., & Gallegos, C. (2010). Development of highly-transparent protein/starch-based bioplastics. *Bioresource technology*, 101(6), 2007-2013.
- [49] Verma, D., Gope, P. C., Maheshwari, M. K., & Sharma, R. K. (2012). Bagasse fiber composites-A review. *J. Mater. Environ. Sci*, 3(6), 1079-1092.
- [50] Arıkan, E. B., & Bilgen, H. D. (2019). Production of bioplastic from potato peel waste and investigation of its biodegradability. *International Advanced Researches and Engineering Journal*, 3(2), 93-97.
- [51] Wahyuningtiyas, N. E., & Suryanto, H. (2017). Analysis of biodegradation of bioplastics made of cassava starch. *Journal of Mechanical Engineering Science and Technology*, 1(1), 24-31.
- [52] Mohapatra, A., Prasad, S., & Sharma, H. (2014). Bioplastics utilization of waste banana peels for synthesis of polymeric films. Unpublished PhD Thesis, Chemical Engineering, University of Mumbai.
- [53] Crawford, R. L. (1981). *Lignin biodegradation and transformation*. New York: John Wiley and Sons. ISBN 0-471-05743-6.
- [54] Joshi, S., Sharma, U., & Goswami, G. (2014). Bio-Plastic from Waste Newspaper. In *International Conference on Emerging Trends of Research in Applied Sciences and Computational Techniques*.
- [55] Rohmawati, B., Sya'idah, F. A. N., Alighiri, D., & Eden, W. T. (2018). Synthesis of Bioplastic-Based Renewable Cellulose Acetate from Teak Wood (*Tectona grandis*) Biowaste Using Glycerol-Chitosan Plasticizer. *Oriental Journal of Chemistry*, 34(4), 1810.
- [56] Holis A. Holik\*, Margareta Sianne, DriyantiRahayu. (2014). Cellulose from elephant grass leaves (*pennisetum purpureum schumach.*) as an alternative of bioplastic materials. *World Journal of Pharmaceutical Sciences*
- [57] Rentoy, F. A. M., Angot, D. R., Mabaquiao, J. R., & Larroder, A. Development of Cellulose-based Bioplastic from Corn Stalks.
- [58] Agustin, M. B., Ahmmad, B., Alonzo, S. M. M., & Patriana, F. M. (2014). Bioplastic based on starch and cellulose nanocrystals from rice straw. *Journal of Reinforced Plastics and Composites*, 33(24), 2205-2213.
- [59] De Groote, P. H., Devaux, J., & Godard, P. (2002). Effect of benzenesulfonamide plasticizers on the glass-transition temperature of semicrystalline polydodecamide. *Journal of Polymer Science Part B: Polymer Physics*, 40(19), 2208-2218.
- [60] Mekonnen, T., Mussone, P., Khalil, H., & Bressler, D. (2013). Progress in bio-based plastics and plasticizing modifications. *Journal of Materials Chemistry A*, 1(43), 13379-13398.
- [61] Sothornvit, R., & Krochta, J. M. (2005). Plasticizers in edible films and coatings. In *Innovations in food packaging* (pp. 403-433). Academic Press.
- [62] E. H. Immergut and H. F. Mark, *Principles of Plasticization*, in *Plasticization and Plasticizer Processes*, American Chemical Society, Washington, DC, 1965.
- [63] Forssell, P. M., Mikkilä, J. M., Moates, G. K., & Parker, R. (1997). Phase and glass transition behaviour of concentrated barley starch-glycerol-water mixtures, a model for thermoplastic starch. *Carbohydrate Polymers*, 34(4), 275-282.



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)