



IJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 9 Issue: V Month of publication: May 2021

DOI: <https://doi.org/10.22214/ijraset.2021.34154>

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Assessment of Different types of Bracing in Tall Building using Response Spectrum Method

Mohit Sindhe¹, Mr. Sunil Harne², Mr. Vijay Kumar Baradiya³

¹PG Student, ^{2,3}Professor, Department of Civil Engineering, IPS Academy Institute of Engineering & Science, Indore (MP), India

Abstract: Tall Buildings are subjected to lateral movements or Torsional deflections under the action earthquake loads. To prevent the lateral movement of the structure, the structure must be made sufficiently stiff with respect to lateral loads. To improve the lateral stiffness and lateral stability of the tall buildings, bracing the frame members is one of the methods popularly adopted. A Bracing is a system that is provided to minimize the lateral deflection of structure. The members of a braced frame are subjected to tension and compression, so that they are provided to take these forces similar to a truss. The different types of bracing approach are adopted as per mechanism.

The project is based on the assessment of different types of bracing using a G+24 Storey. The plinth area taken as 45m x 25 m (rectangular section pattern) i.e. 1125 m². The Structural parameters are used in three different stage levels which storey as per the need of the structure. The earthquake response can evaluate by using response spectrum method into it. The zone III is taken as per codal approach IS 1893(part1):2016. The Staad software mechanism is used for the modeling. To Analysis of structure based on varying the bracing types such X, K, V, Inverted V, Single Diagonal Bracing in to it by alternate arrangement. The final conclusion made such that with adding the bracing element in tall building the resisting capacity of structure against the lateral forces increases. Most effective structure is diagonal bracing structure. The diagonal and X bracing are most effective types of bracing is all cases of modeling. The inverted V bracing then preferably adopted in it.

Keywords: Tall Buildings, X, K, V, Inverted V, Single Diagonal Bracing, zone III, Response Spectrum Method, IS 1893(part1):2016, zone III.

I. INTRODUCTION

During earthquake motions, deformations take position across the elements of the weight-bearing method as a result of the response of constructions to the ground motion. Because of these deformations, interior forces boost across the factors of the load-bearing approach and displacement behaviour seems across the building. The consequent displacement demand varies relying on the stiffness and mass of the constructing. As a rule, buildings with higher stiffness and diminish mass have smaller horizontal displacements demands. On the contrary, displacement needs are to increase. Then again, every building has a specific displacement potential. In different words, the quantity of horizontal displacement that a building can have the funds for without collapsing is restricted. The reason of strengthening ways is to ensure that the displacement demand of a constructing is to be kept beneath its displacement potential. It will most commonly be finished by means of decreasing anticipated displacement demand of the constitution for the period of the strong motion or improving the displacement ability of the constitution. To oppose lateral earthquake loads, shear dividers are normally utilized in RC confined structures, while, steel propping is the regularly utilized in steel structures. In the previous two decades, various reports have likewise demonstrated the compelling utilization of steel propping in RC outlines. Steel supporting of RC structures began as a retrofitting measure to fortify earthquake-harmed structures or to expand the heap opposing limit of existing structures. The bracing methods adopted in the past fall into two main categories, namely external bracing and internal bracing. In the external bracing system, existing buildings are retrofitted by attaching a local or global steel bracing system to the exterior frames. In the internal bracing method, the buildings are braced by incorporating a bracing system inside the individual bays of the RC frames. The bracing may be attached to the RC frame either indirectly or directly. A Bracing is a system that is provided to minimize the lateral deflection of structure. The members of a braced frame are subjected to tension and compression, so that they are provided to take these forces similar to a truss A braced frame is a structural system commonly used in structures subject to lateral loads such as wind and seismic pressure. The members in a braced frame are generally made of structural steel, which can work effectively both in tension and compression. The beams and columns that form the frame carry vertical loads, and the bracing system carries the lateral loads. The positioning of braces, however, can be problematic as they can interfere with the design of the façade and the position of openings. Buildings adopting high-tech or post-modernist styles have responded to this by expressing bracing as an internal or external design feature.

II. MODELLING AND ANALYSIS

For this study on “Assessment of Different types of Bracings in Tall Buildings Using Response Spectrum Method” seven different models with same structural properties has been modelled in Staad Pro v8i and analysed using response spectrum method. The plan area for the modelling is considered as 25.00 m x 45.00m. The different types of bracing system can be taken in the G+24 Storey building which X bracing, diagonal bracing, V bracing, Inverted V bracing, K bracing in alternate grid arraignment in the tall building. For modelling and analysis purpose Stadd.pro v8i has been used. All the structural models follows the criteria mentioned in above paragraphs. Fig 3.4 to Fig. 3.24 shows the models completed in the Stadd.pro v8i software. The structure system modelled than analyzed in the software to get the results for this study.

The seven models are modelled on staad.pro software. The coding name is as follows:

- 1) *Model 1:* BE1 – Regular Building (No Bracing Element)
- 2) *Model 2:* BE2 – Building with X- Bracing Element
- 3) *Model 3:* BE3 – Building with Diagonal Bracing Element
- 4) *Model 4:* BE4 – Building with Inverted Diagonal Bracing Element
- 5) *Model 5:* BE5 – Building with K- Bracing Element
- 6) *Model 6:* BE6 – Building with V- Bracing Element
- 7) *Model 7:* BE7 – Building with Inverted V Bracing Element

Table 1, 2 & 3 can be tabulated the basic requirement of the building analysis. Table 1 show the Structure Parameters, table 2 to give the details of Seismic Data and Table 3 tabulated the Material Properties in it.

TABLE 1: Structure Parameters

| S. No | Particular | Details | S. No | Particular | Details |
|-------|---------------------|------------|-------|----------------------------|---------------------------|
| 1 | Column Size | | 4 | Slab thickness | 130 mm thick |
| 1.a | Ground - G+8 | 750x750mm | 5 | Bracing Size | 230 mm x 450 mm |
| 1.b | G+9 - G+17 | 700x650 mm | 6 | Partition Wall Density | 20.00 KN/m ³ |
| 1.c | G+18 - G+24 & tower | 600x550 mm | 7 | Shear Wall thickness | 180 mm (Single core type) |
| 2 | Column Spacing | | 8 | Stair Waste slab thickness | 150 mm |
| 2.a | X-direction | 5.00 m c/c | 6 | Column-Foundation Joint | Fixed at base |
| 2.b | Z-direction | 5.00 m c/c | 4 | Slab thickness | 130 mm thick |
| 3 | Beam Size (Main) | | 5 | Bracing Size | 230 mm x 450 mm |
| 3.a | Ground - G+8 | 550x500mm | 6 | Partition Wall Density | 20.00 KN/m ³ |
| 3.b | G+8 - G+17 | 500x450 mm | | | |
| 3.c | G+18 - G+24 & tower | 450x350 mm | | | |

TABLE 2: Seismic Data

| S. No. | Description | Details |
|--------|---------------------------|--------------------|
| 1 | Seismic Zone | III |
| 2 | Zone Factor | 0.16 |
| 3 | Soil Type | Medium |
| 4 | Importance Factor | 1.2 |
| 5 | Response Reduction Factor | 4 |
| 7 | Time Period (Second) | Tx= 1.71, Tz =1.27 |
| 8 | Method of Analysis | Response Spectrum |
| 9 | Damping | 0.05(5%) |

TABLE 3: Material Properties

| S. No. | Property | Concrete (N/mm ²) | Rebar N/mm ²) |
|--------|-----------------------|-------------------------------|---------------------------|
| 1 | Designation | M-25 | HYSD-500 |
| 2 | Yield Strength | 500 | - |
| 3 | Compressive Strength | - | 20 |
| 4 | Unit Weight | 76.9729 | 25 |
| 5 | Modulus of Elasticity | 200000 | 31622.78 |

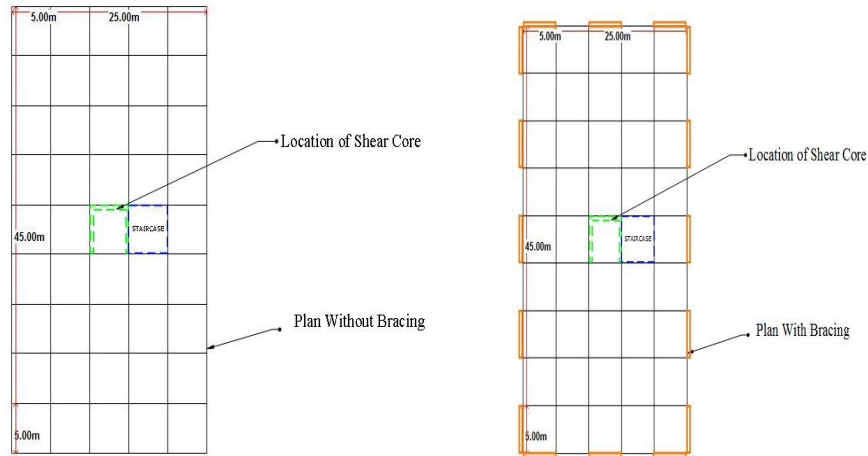


Fig 1: a) Common Grid plan for modelling b) Grid plan with bracing position

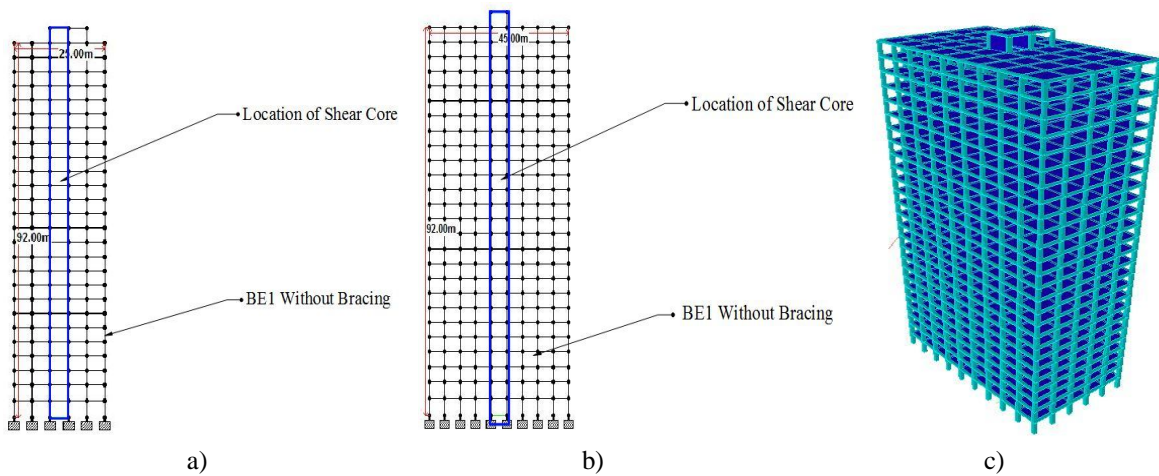


Fig. 2: Case BE1 Regular Model: a) Elevation @ X Direction, b) Elevation @ Z Direction c) 3D View

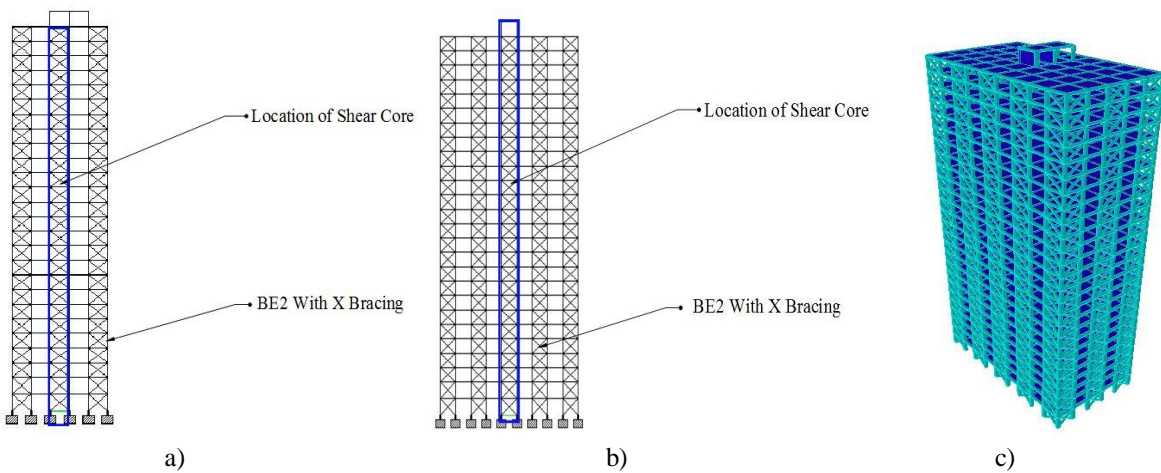


Fig. 3: Case BE2 X Bracing: a) Elevation @ X Direction, b) Elevation @ Z Direction c) 3D View

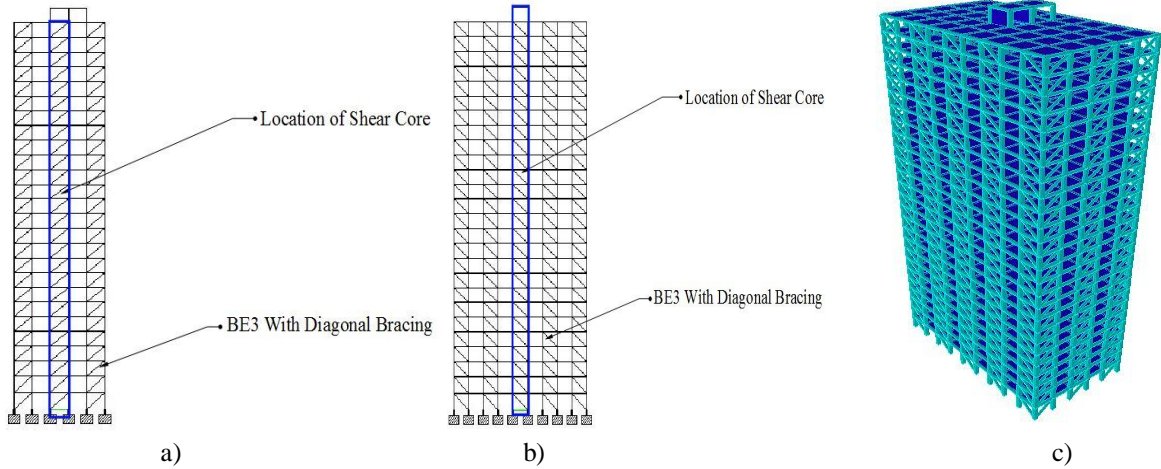


Fig 4: Case 3: BE3 Diagonal -Bracing : a) Elevation @ X Direction, b) Elevation @Z Direction c) 3D View

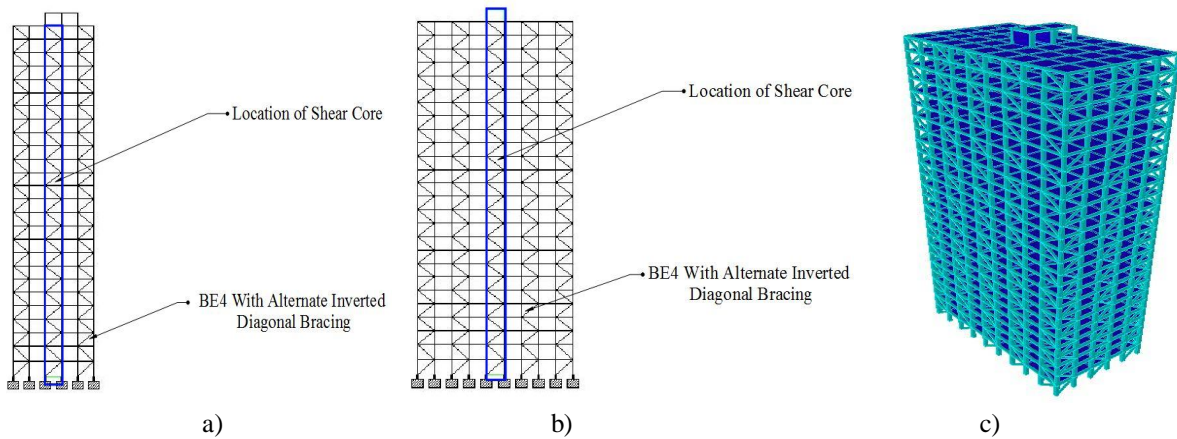


Fig 5: Case 4: BE4 Inverted Diagonal Bracing Model: a) Elevation @ X Direction, b) Elevation @Z Direction c) 3D View

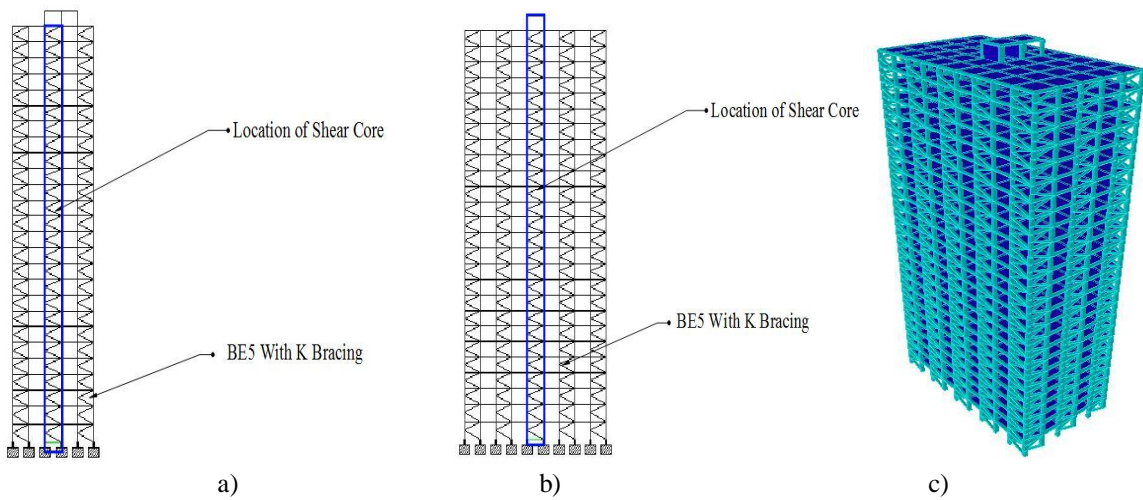


Fig 6: Case 5: BE5 K- Bracing Model: a) Elevation @ X Direction, b) Elevation @Z Direction c) 3D View

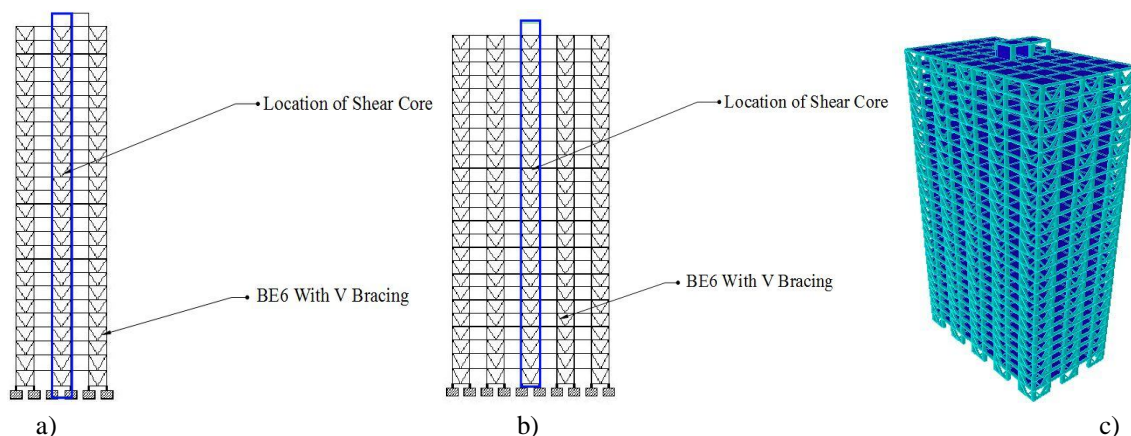


Fig 7: Case 6: BE6 V- Bracing Model: a) Elevation @ X Direction, b) Elevation @Z Direction c) 3D View

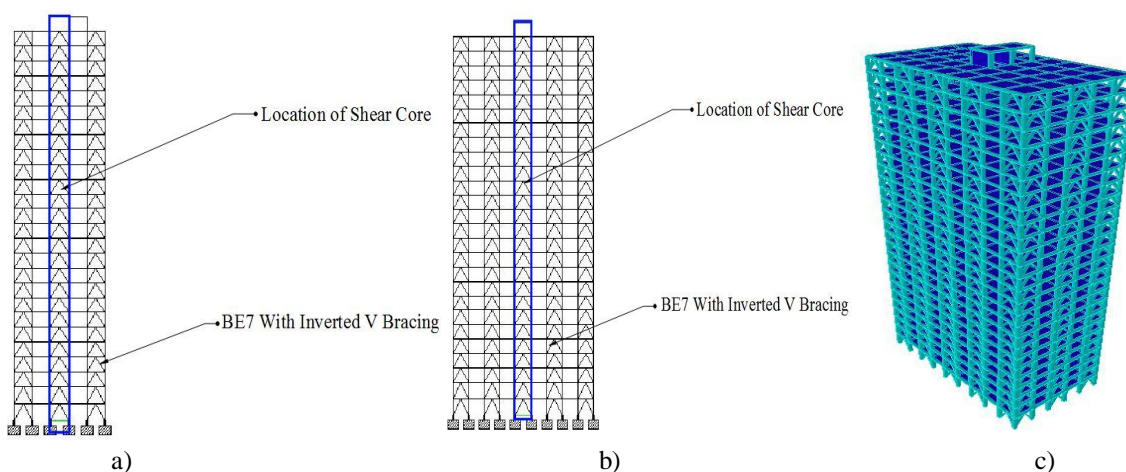


Fig 8: Case 7: BE7 Inverted V- Bracing Model: a) Elevation @ X Direction, b) Elevation @Z Direction c) 3D View

III.RESULTS AND DISCUSSIONS

Based on the modelling approach the following results are to be evaluated by tabulated and graphical representation forms. The parameters taken for the results are Maximum Displacement (at top level of the building) , Base shear, Maximum Axial forces, SF and BM in beam and columns, Torsional Moment. Table 4 to 11 shows all the tabulated results and fig no 9 to 16.

Table 4: Maximum Displacement in X direction for all 7 Buildings in Zone III

| Building | Maximum Displacement (mm) | Maximum Displacement (mm) |
|----------|---------------------------|---------------------------|
| | For X Direction | For Z Direction |
| BE1 | 258.262 | 298.201 |
| BE2 | 214.620 | 229.448 |
| BE3 | 162.154 | 137.569 |
| BE4 | 218.806 | 235.464 |
| BE5 | 222.994 | 239.775 |
| BE6 | 220.068 | 236.275 |
| BE7 | 214.684 | 229.343 |

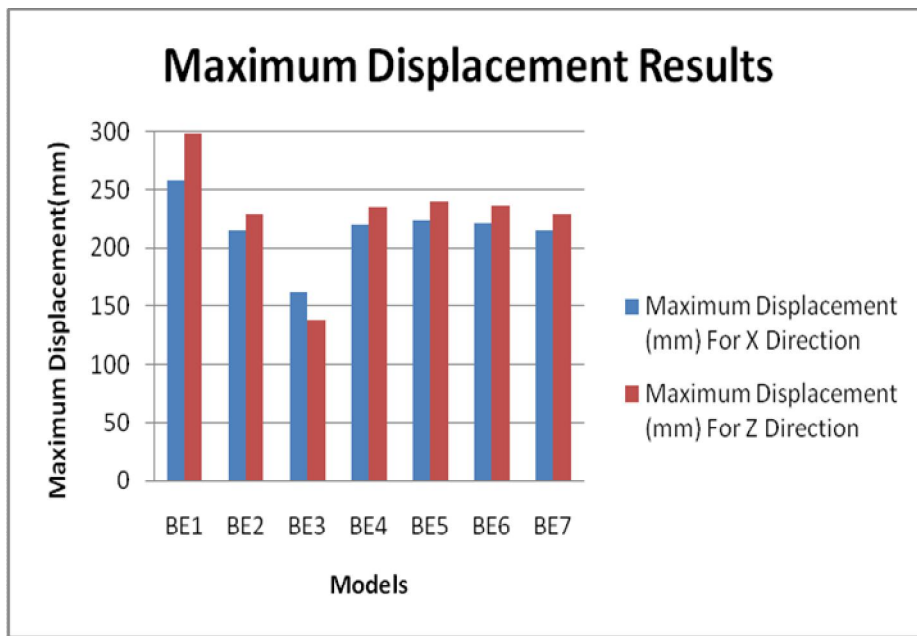


Fig.9: Maximum Displacement in X direction for all 7 Buildings in Zone III

Table 5: Base Shear in X and Z direction for all 7 Buildings in Zone III

| Building | Base Shear (KN) | |
|----------|-----------------|-------------|
| | X direction | Z direction |
| BE1 | 14718.21 | 21134.72 |
| BE2 | 19320.20 | 25652.37 |
| BE3 | 23213.83 | 25864.15 |
| BE4 | 18601.09 | 24854.05 |
| BE5 | 18507.54 | 24691.10 |
| BE6 | 18837.74 | 25051.37 |
| BE7 | 19113.14 | 25415.41 |

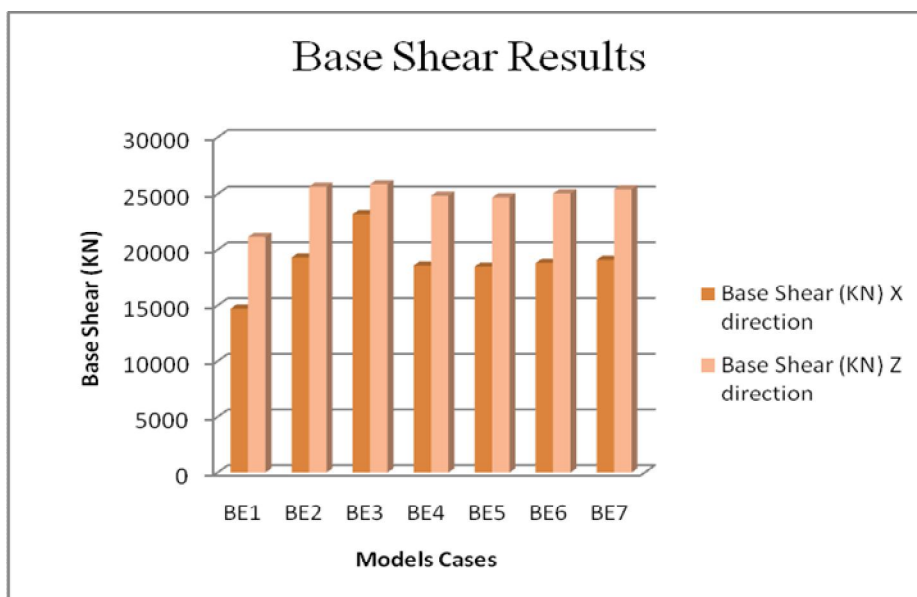


Fig. 10: Base Shear in X direction for all 7 Buildings in Zone III

Table 6: Maximum Axial Forces in Column at ground level for all 7 Buildings in Zone III

| Building | Column Axial Force (KN) |
|----------|-------------------------|
| BE1 | 17395.314 |
| BE2 | 13868.139 |
| BE3 | 15036.048 |
| BE4 | 14619.401 |
| BE5 | 14877.746 |
| BE6 | 18837.74 |
| BE7 | 13966.06 |

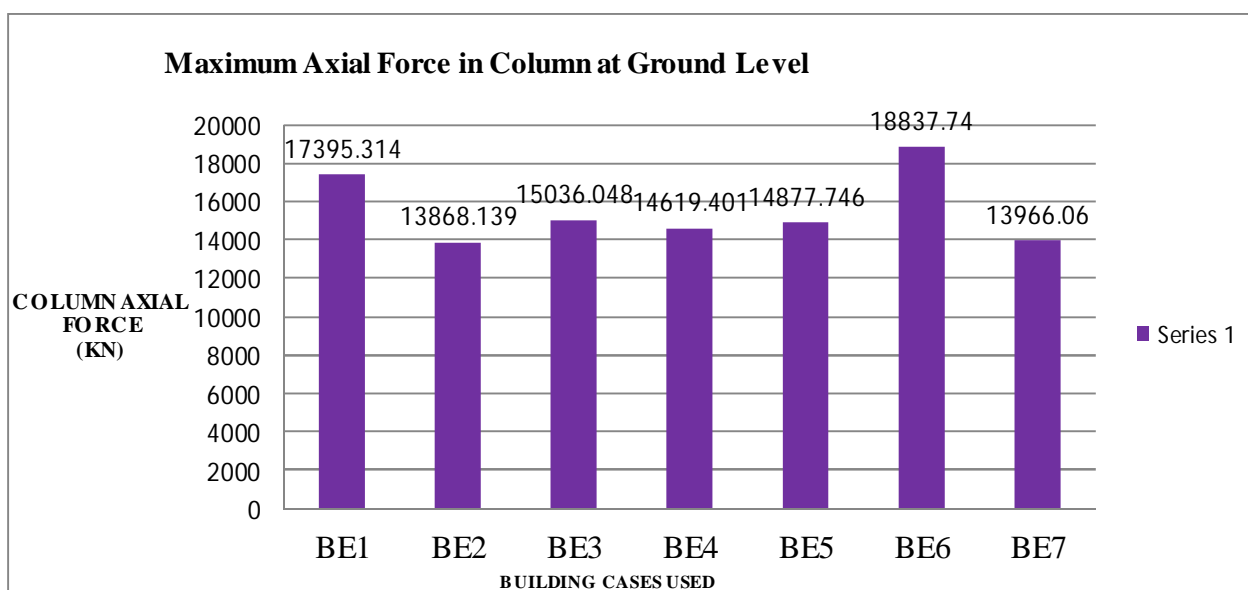


Fig. 11: Maximum Axial Forces in Column at ground level for all 7 Buildings in Zone II

Table 7: Maximum Shear Forces in Columns for all 7 Buildings in Zone III

| Building | Column Shear Force (KN) | |
|----------|-------------------------|---------------|
| | Shear along Y | Shear along Z |
| BE1 | 383.360 | 627.674 |
| BE2 | 330.011 | 486.058 |
| BE3 | 254.668 | 318.500 |
| BE4 | 338.195 | 495.515 |
| BE5 | 378.625 | 509.944 |
| BE6 | 336.308 | 497.474 |
| BE7 | 329.105 | 487.501 |

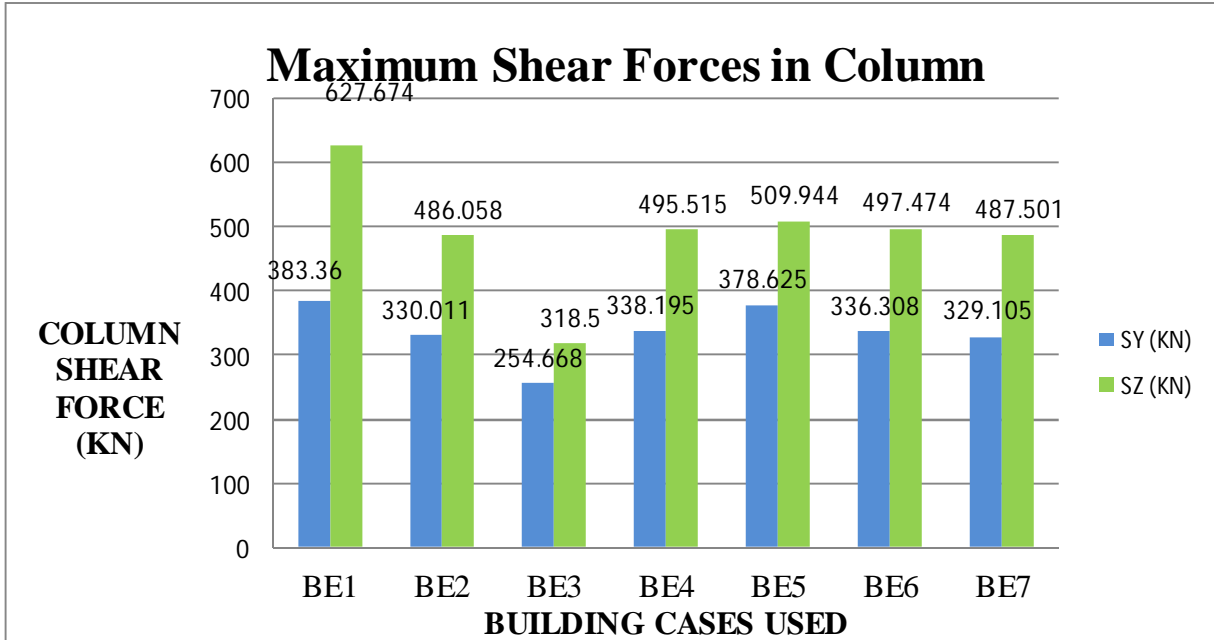


Fig. 12: Maximum Shear Forces in Columns for all 7 Buildings in Zone III

Table 8: Maximum Bending Moment in Columns for all 7 Buildings in Zone III

| Building | Column Bending Moment (KN.m) | |
|----------|------------------------------|----------------|
| | Moment along Y | Moment along Z |
| BE1 | 1129.169 | 678.854 |
| BE2 | 875.777 | 584.169 |
| BE3 | 576.746 | 485.251 |
| BE4 | 890.501 | 598.684 |
| BE5 | 918.144 | 697.253 |
| BE6 | 896.146 | 595.529 |
| BE7 | 877.356 | 582.459 |

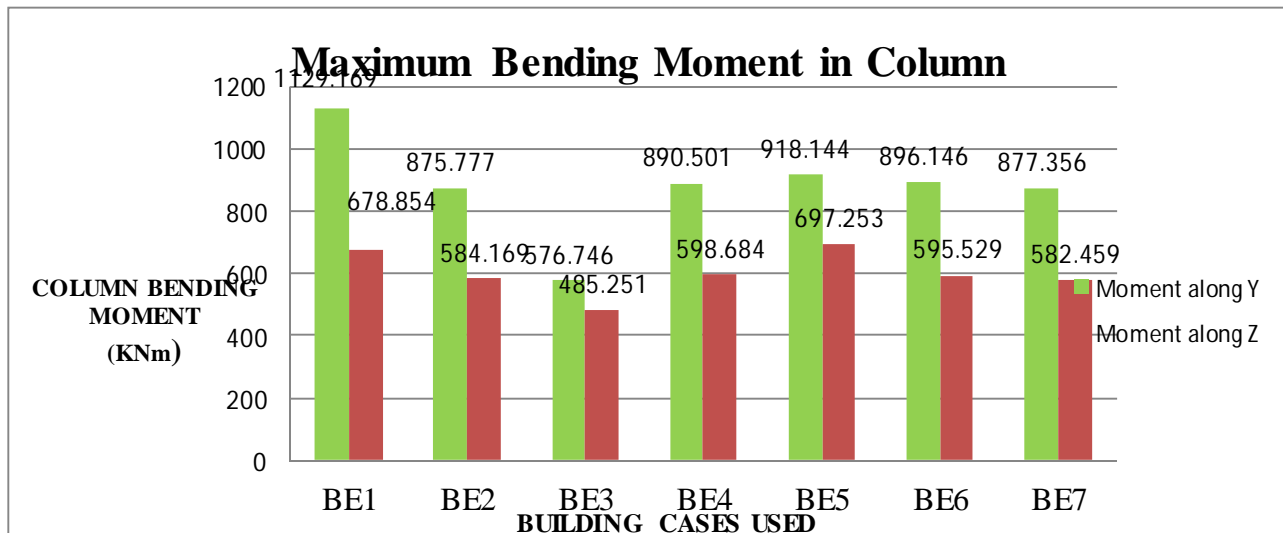


Fig. 13: Maximum Bending Moment in Columns for all 7 Buildings in Zone III

Table 9: Maximum Shear Forces in beams parallel to X direction for all 7 Buildings in Zone III

| Building | Beam Shear Force (parallel to X direction) (KN) | Beam Shear Force (parallel to Z direction) (KN) |
|----------|---|---|
| BE1 | 151.749 | 167.806 |
| BE2 | 139.723 | 142.54 |
| BE3 | 116.194 | 119.56 |
| BE4 | 140.901 | 144.686 |
| BE5 | 140.432 | 146.428 |
| BE6 | 155.672 | 154.345 |
| BE7 | 232.412 | 233.718 |

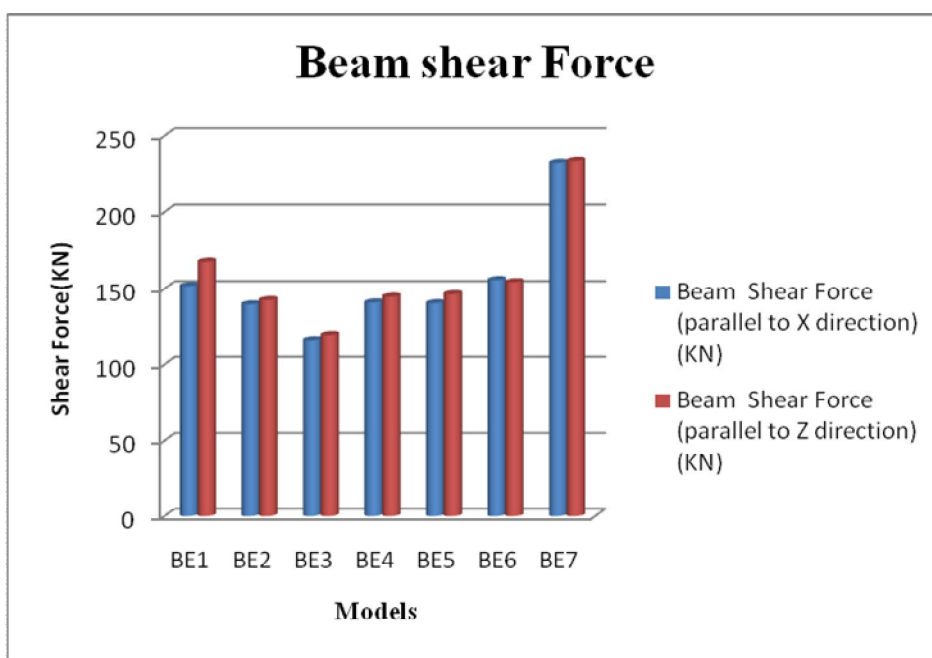


Fig. 14: Maximum Shear Forces in beams parallel to X direction for all 7 Buildings in Zone III

Table 10: Maximum Bending Moment in beams parallel to X direction for all 7 Buildings in Zone III

| Building | Beam Bending Moment (along X direction) (KN.m) | Beam Bending Moment (along Z direction) (KN.m) |
|----------|--|--|
| BE1 | 317.171 | 363.106 |
| BE2 | 282.338 | 297.862 |
| BE3 | 208.606 | 218.301 |
| BE4 | 285.615 | 302.787 |
| BE5 | 290.484 | 307.696 |
| BE6 | 286.361 | 301.681 |
| BE7 | 305.401 | 309.033 |

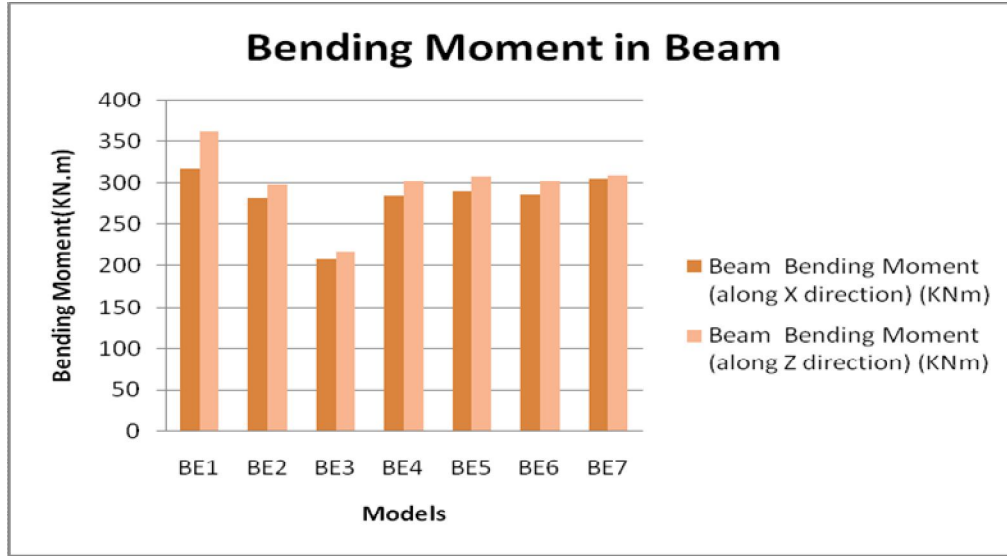


Fig. 15: Maximum Bending Moment in beams parallel to X direction for all 7 Buildings in Zone III

Table 11: Maximum Torsional Moment in beams along X and Z direction for all 7 Buildings in Zone III

| Building | Beam Torsional Moment (along X direction) (KN.m) | Beam Torsional Moment (along Z direction) (KN.m) |
|----------|--|--|
| BE1 | 12.387 | 10.11 |
| BE2 | 10.086 | 9.401 |
| BE3 | 6.79 | 6.276 |
| BE4 | 10.155 | 8.518 |
| BE5 | 12.352 | 8.677 |
| BE6 | 15.026 | 14.349 |
| BE7 | 13.567 | 12.686 |

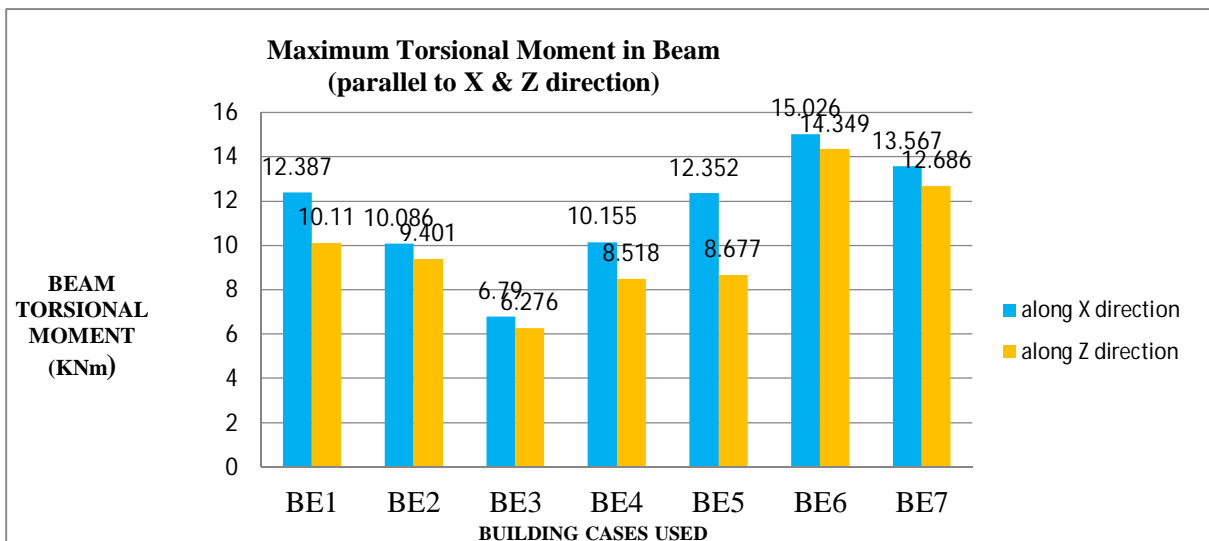


Fig. 16: Maximum Torsional Moment in beams parallel to X & Z direction for all 7 Buildings in Zone III

IV. CONCLUSIONS

Based on the modelling and analysis of the different models BE1 to BE7 (Total 7 Models) in which is use of different types of bracing system in alternate arrangement pattern and compare with the regular building(BE1) having no bracing element. The results are tabulated and graphical represented on the previous chapter. Based on these results the following conclusions are made. These conclusions are as follows:

- A. There is decrement in maximum displacement value will be observed when bracing system adopted in the building. The decrement value is 16.90%, 37.21%, 15.28%,13.66%, 14.79% & 16.87% in observed in BE2,BE3,BE4,BE5,BE6 & BE7 respectively with respect to BE1(regular building.) in X-direction. Similarly 23.06%, 53.87%, 21.04%, 19.59%, 20.77% & 23.09% decrement in displacement value in BE2 to BE7 with respect to BE1 in Z-Direction.
- B. There is increment in base shear value will be observed when bracing system adopted in the building due to self weight is increases. The increment in value is 31.27%, 57.72%, 26.38%, 25.75%, 27.99% & 29.86 in X direction. Similarly 21.38%, 22.38%,17.60%,16.83%,18.53% & 20.25% in Z Direction in BE2 to BE7 with reference to BE1 (without bracing element model).
- C. The Axial forces value is decreases which are 20.28%, 13.56%, 15.96%, 14.47% & 19.71% in BE2, BE3, BE4, BE5 & BE7 respectively with respect to BE1. The increment is observed in case of BE 6 which 8.29%.
- D. The shear force value in column is decreases in all bracing models. There is decrement of 13.92%, 33.57%, 11.78%, 1.24%, 12.27%, and 14.15% in BE2 to BE7 as compare to BE1 in X direction. Similarly decrement value of 22.56%, 49.26%, 21.06%, 18.76%, 20.74%, and 22.33% in BE2 to BE7 as compare to BE1 in Z-direction.
- E. The Bending moment value in column is decreases in all bracing models. There is decrement of 22.44%, 48.92%, 21.14%, 18.69%, 20.64%, and 22.30% in BE2 to BE7 as compare to BE1 in X direction. Similarly decrement value of 13.95%, 28.52%, 11.81%, 12.27%, 14.20%, in BE2, BE3, BE4, BE6, and BE7 as compare to BE1 in Z-direction. Increment of 2.71% in BE5 in Z direction.
- F. The Torsional moment value is decrement in BE2,BE3,BE4,BE5 in both direction which is 18.58%, 45.18%, 18.02% in X direction and 7.01%,37.92%, 15.75% in Z direction respectively. The increment value of 21.30%, 9.53% in BE6, BE7 in X direction and 41.93%, 25.48% in Z direction with reference to BE1(regular Building).
- G. The shear force value in beam is decreases in BE2, BE3, BE4, BE5 which is 7.92%, 23.43%, 7.15%, 7.46% in X-direction and 15.06%, 28.75%, 13.78%, 12.74%, 8.02% in BE2 to BE 6 in Z direction, increment value is observed in BE7 which is 39.28%.
- H. The Bending moment value in beam is decreases in all bracing Buildings. There decrement of 10.98%, 34.23%, 9.95%, 8.41%, 9.71%, 3.71% in BE2 to BE7 in X direction. Similarly in Z direction the decrement is observed is 17.97%, 39.88%, 16.61%, 15.26%, 16.92%, 14.89% in BE2 to BE7 with reference to BE1 model.

The overall concluded that with introduce of bracing element in tall building the resisting capacity of structure against the lateral forces increases. The diagonal and X bracing are most effective types of bracing is all cases of modelling. The inverted V bracing than preferably adopted in it.

REFERENCES

- [1] Arvind Vishwakarma, Savita Maru(2019)Assessment on Human Comfort Criteria of Tall Building under Dynamic Wind Loading International Journal of Innovative Technology and Exploring Engineering (IJITEE) ISSN: 2278-3075, Volume-9, Issue-2, December 2019 Retrieval Number: B6688129219/2019@BEIESP DOI: 10.35940/ijitee. B6688.129219, pp 2265-2273.
- [2] Zuohua Li , Pengyuan Liu & et. al. (2018) "Seismic Performance and Failure Mechanism of Megabraced Frame-Core Tube Structures with Different Brace Patterns" Hindawi Advances in Civil Engineering, Volume 2018, Article ID 3178060, 23 pages, pp 1-25, <https://doi.org/10.1155/2018/3178060>
- [3] Saurabh Kanungo & Komal Bedi (2018)"Analysis Of A Tall Structure With X-Type Bracings Considering Seismic Load Using Analysis Tool Stadd.Pro" International Journal Of Engineering Sciences & Research Technology (Ijesrt), Impact Factor: 5.164, IC™ Value: 3.00 CODEN: IJESS7, ISSN: 2277-9655, pp 366-373.
- [4] Anusha K and Raghu K (2018) "Analysis of Braced Frame Multi Storied Structure with Different Angles as Per Indian Standards" International Research Journal of Engineering and Technology (IRJET) e-ISSN: 2395-0056, Volume: 05 Issue: 05 | May-2018 www.irjet.net p-ISSN: 2395-0072. Pp 1816-1818
- [5] Atik Masum, Muhtadi Ratul et.al.(2018) Effect Of Different Bracing Systems On The Structural Performance Of Steel Building, Proceedings of the 4th International Conference on Civil Engineering for Sustainable Development (ICCESD 2018), KUET, Khulna, Bangladesh (ISBN-978-984-34-3502-6) 4th International Conference on Civil Engineering for Sustainable Development (ICCESD 2018) pp1-8
- [6] Mona Dilipkumar K, Rahul Pandit et.al.(2018) APZipper Braced Frame: A review, Engineering Technology Open Access Journal, ETOAJ.MS.ID.555583 (2018) Mini Review Volume 2 Issue 2 - July 2018 DOI: 10.19080/ETOAJ.2018.02.555583 Eng Technol, pp 45-48.
- [7] Kartik prashar , Jagdeep Singh Gahir (2018) Review Paper on Seismic Behaviour of RC Frame Structure With Different Types of Bracing System International Journal of Engineering and Techniques - Volume 4 Issue 2, Mar-Apr 2018, ISSN: 2395-1303 , PP 1035-1041.



- [8] Mahdi Hosseini, N. V. Ramana Rao (2017) "Earthquakes Analysis of High Rise Buildings with Effect of Box Shape RC Shear Walls at the Center" International Journal of Engineering and Advanced Technology (IJEAT), ISSN: 2249 – 8958, Volume-7 Issue- pp 50-74.
- [9] Hongli Wang (2017) "Research on Design of High Rise Building Based on Seismic Design Theory" Chemical Engineering Transactions(CET), VOL. 59, 2017 A publication of The Italian Association of Chemical Engineering, AIDIC Servizi S.r.l. ISBN 978-88-95608- 49-5; ISSN 2283-9216. PP 511-515. DOI: 10.3303/CET1759086
- [10] Bhalchandra p. Alone, Ganesh Awchat (2017) Study on seismic analysis of high-rise building by using software Seismic Analysis in software of STAAD pro v8i (Ground +3 Basements + 50 storeys) ISSN: 2455-2631, August 2017 IJSDR | Volume 2, Issue 8, IJSDR1708018 International Journal of Scientific Development and Research (IJSDR), pp 123-131.
- [11] E. RaviKumar, P. Raghava et.al. (2017) eismic Analysis of Tall Building for Different Earthquake Zones International Journal of Emerging Technologies in Engineering Research (IJETER), Volume 5, Issue 4, ISSN: 2454-6410 pp 134-138.
- [12] B. Preethi and A. Mallika (2015) "Comparative Study of different Bracing Patterns for different Plan Irregularities of the Buildings" urnal of Civil Engineering and Environmental Technology, Print ISSN: 2349-8404; Online ISSN: 2349-879X; Volume 2, Number 14; July-September, 2015 pp. 36-41.
- [13] Ozgur, Ozcebe, Prof. Dr. Guney (2007) The Analysis And Design Of The Tallest Buildings Conference Paper · January 2007 DOI: 10.13140/2.1.5119.6168
- [14] K. Rama Raju, M.I. Shereef, Nagesh R Iyer, S. Gopalakrishnan (2013) Analysis Of Tall Building Subjected To Wind And Sesimic Loads National Conference on Emerging Technologies in Civil Engineering (ETCE'13), PP 103-111
- [15] A. Moein Amini & M. Majd, M. Hosseini (2012) A Study on the Effect of Bracing Arrangement in the Seismic Behaviour Buildings with Various Concentric Bracings by Nonlinear Static and Dynamic Analyses 15 WCEE, LISBOA.
- [16] Iswanath. K.G, Prakash. K.B, Anant. D,(2010) "Seismic Analysis of Steel Braced Reinforced Concrete Frames," International Journal of Civil and Structural Engineering, Integrated Publishing services, Volume 1.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)